

52" Ceiling Fan

(Natural Brass)

Project Name: _____
Location: _____
Type: _____
Qty: _____
Comments: _____

Product Information

Finish	Natural Brass
Blade Finish	Cherry/Non-Reversible

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
Low	152	5126	158	.46	32
Med	90	2988	336	.14	9
High	51	1387	408	.06	3

Specifications

Number of Blades	2
Blades Included	Yes
Blade Pitch	28 Degrees
Blade Sweep	54"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	FLUSHMOUNT ONLY
Primary Control System	6 Speed Dc Cooltouch
Remote Included	Yes
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	8.00"
Motor Size	DC-125
Motor Type	DC

Safety Listings & Certifications


Safety Rated	Dry
--------------	-----

Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL listed electrical junction boxes marked "For Fan Support"
---------------------------	--



Dimensions

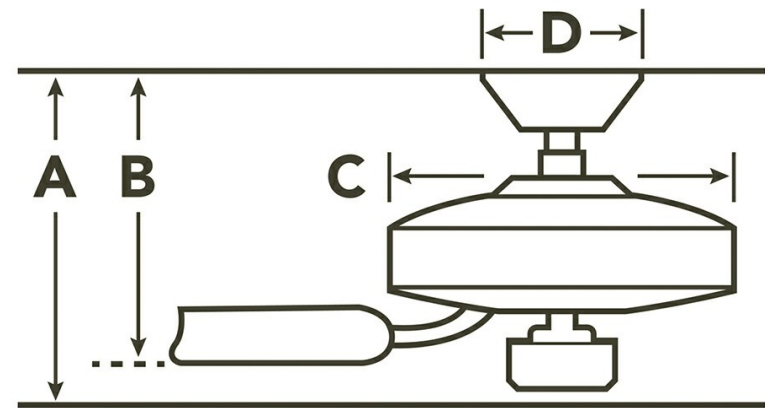

Downrod	A	B	C	D
FLUSHMOUNT ONLY	24.25	24.25	9.50	7.75

Available Finishes

Finish	Glass	Blade 1	Blade 2
--------	-------	---------	---------

Notes:
1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

52" Ceiling Fan NBR

(Natural Brass)

Brushed Nickel	N/A	SILVER	NON-REVERSIBLE
Oil Brushed Bronze	N/A	DARK OAK	NON-REVERSIBLE
Polished Nickel	N/A	WALNUT	NON-REVERSIBLE
Natural Brass		CHERRY	NON-REVERSIBLE

Control Options

Descr
6 Speed DC Wall Transmitter
6 Speed DC Wall Transmitter
6 Speed DC Wall Transmitter

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Electrical Requirements	120V 60Hz AC
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Notes:
1) Information provided is subject to change without notice.
All values are design or typical values when measured under laboratory conditions.
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.