






① ② ③		⑤ ⑥		⑨ ⑩		 X 1PCS  X 1PCS  X 3PCS
④		⑦ ⑧		⑪ ⑫		 X 3PCS  X 3PCS  X 3PCS

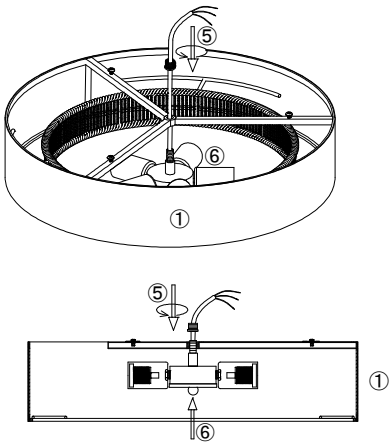


1.Remove out the threaded rod ⑤ from light fixture ⑥, let the wire of the fixture ⑥ go through the lampshade ① and threaded rod ⑤, rotate rod ⑤ to install the lampshade ① to the fixture ⑥.

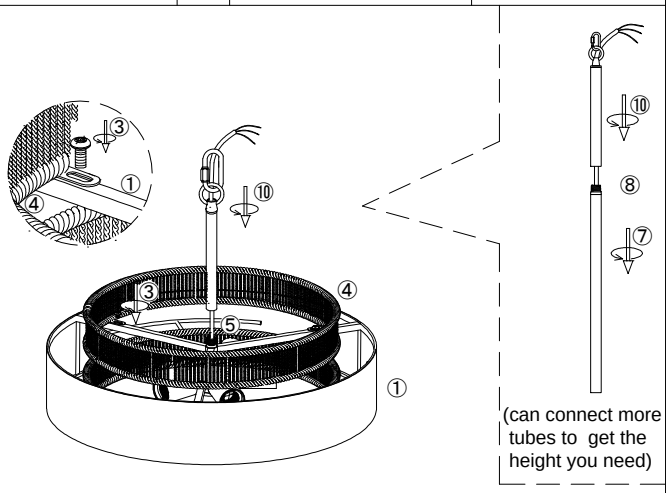


2. Install the lampshade ④ to the fixture with screw ③.(don't tighten the screws ③ until all screws ③ are ready in the holes of lampshade ①, rotate to fasten the screws ③ at last)
3. Let the wire of the fixture go through the tube ⑩, rotate to install the tube ⑩ to the fixture.(can connect more tubes to get the height you need)

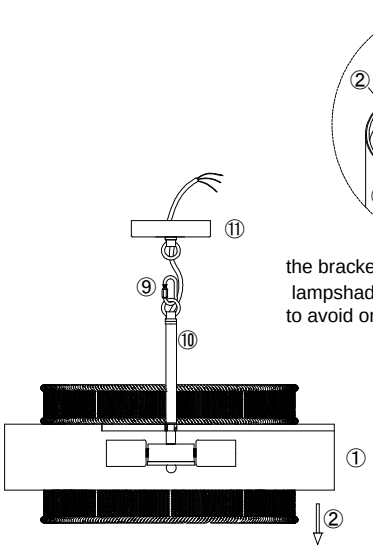



the brackets in the lampshade ① and lampshade ② should be staggered to avoid on the same horixontal ine.

4.Hang the fixture to the canopy ⑪ with carabiner hook screw connection ⑨, let the wire go through the ring ⑨ and canopy ⑪.
5. Pull down the inner lampshade ② from lampshade ①, and adjust it level.

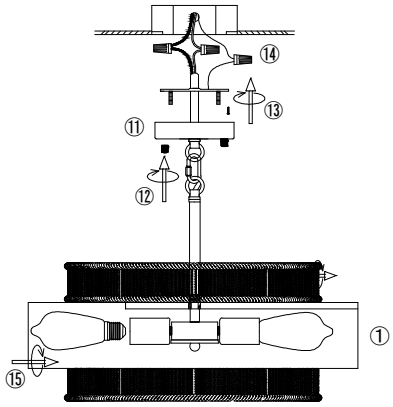

6.Install the bracket to the ceiling junction box with screw ⑬.
7. Connect the wire to your home line with cap connector ⑭.
8. Install the fixture to the bracket with cap nut ⑫.
9. Install the bulb ⑮. (bulbs are not included in the package).

D9119M-5

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !