


Parts:

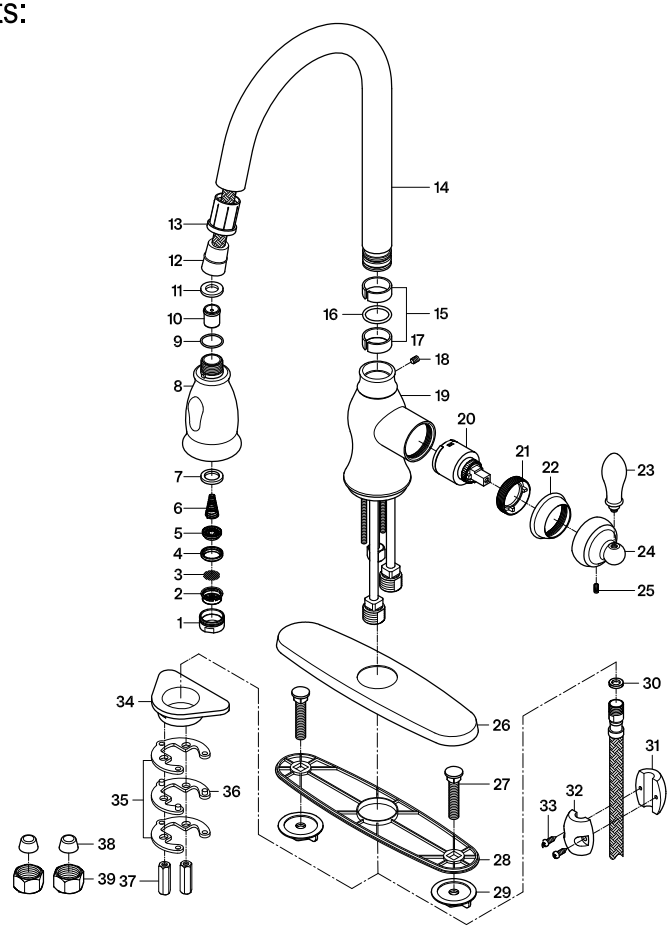


Replacement Parts:




Cartridge: KSRP3891C



Handle: GSYH8891ACL

KINGSTON

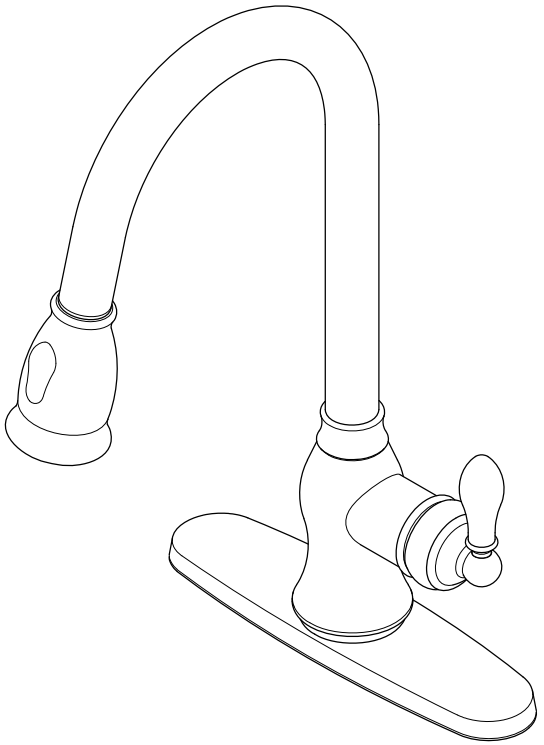

## CARE AND MAINTENANCE OF YOUR FAUCET

Your KINGSTON faucet has been finished to the most strict standards; however, due to the high content of minerals in the water, your finish may appear dull and tarnished after time. These are some do's and don'ts to maintain the luster on your faucet for many years to come.





DO
1. Use a silicon based caulking when installing.
2. Clean your faucet with only a mild soap and water solution.
3. Dry your faucet after using it.
4. Give it a coat of Carnauba Wax periodically.

DON'T
1. Use plumbers putty when installing the faucet.
2. Use any abrasive cleaning agents.

It may seem like a very simple and short list but it is that simple to maintain your faucet, looking shiny and new.

If your faucet is already looking somewhat dull and tarnished, before replacing it, try cleaning it with a 50/50 solution of vinegar and water, you may need to soak some rags and wrap around those stubborn areas, leave
overnight and rinse completely in the morning, apply Carnauba wax once you have removed the mineral deposits.

## Parts:

| Washer & Lock Nut | Support | Bolt & Lock Nut | Cone Washer & Coupling Nut | Counter Weight & Screw |
|---|---|---|---|---|
|  |  |  |  |  |
| 1 Pc | 1 Pc | 2 Pcs | 2 Pcs | 1 Set |

**NOTICE**

Failure to follow all directions may cause leaks which may result in water damage


www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710


# KINGSTON

## INSTALLATION INSTRUCTIONS
## Pull-Down Kitchen Faucet


**BEFORE BEGINNING INSTALLATION:**

1. Flush plumbing lines to clear any debris.
2. Shut off both supply lines after flushing.

**Need Tools:**

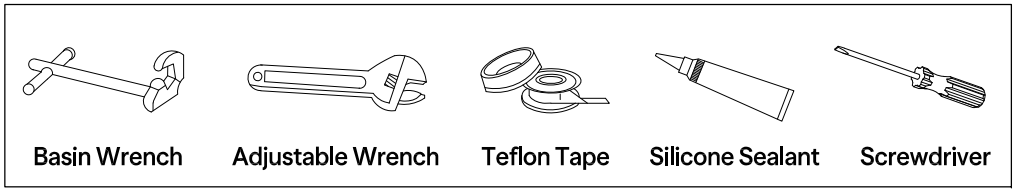



**1**

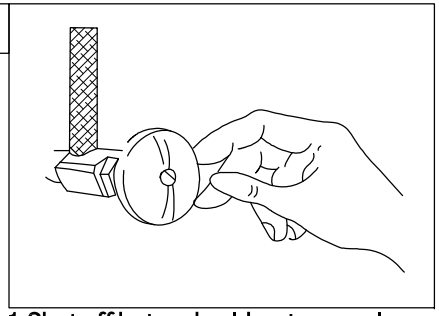


1. Shut off hot and cold water supply under sink. Plug sink drain with cloth to avoid losing small parts.
Remove old faucet.

**2**

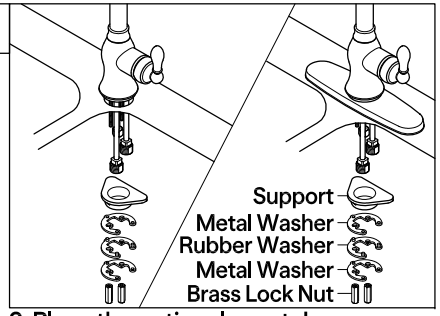



2. Place the optional escutcheon or flange at the bottom of the new faucet before positioning it through the mounting hole. Carefully insert the support, washers, and brass lock nut into the faucet shank, securing them gently. Ensure the faucet is centered in position.

**3**

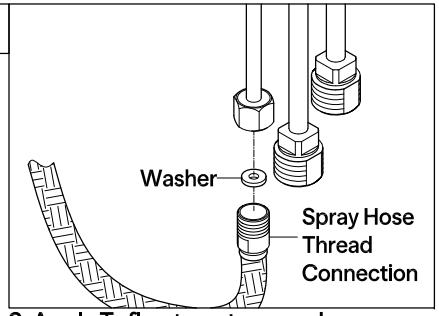



3. Apply Teflon tape to spray hose threads.
After inserting rubber washer into the faucet's spray hose tube, thread spray hose into the spray hose tube.

**4**

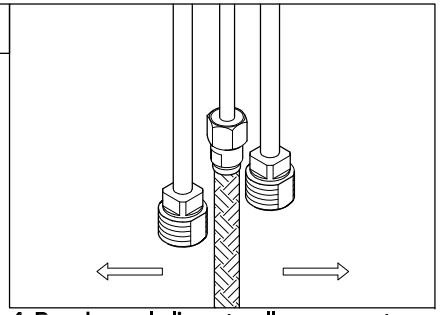


4. Bend supply lines to allow space to thread supply hoses. When bending the lines make sure to gradually bend one tube at a time while holding may move the point of contact gradually down as to prevent kinks from developing .
NOTE: Kinked lines will void warranty.

**5**

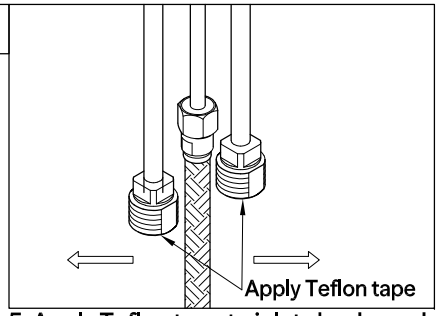



5. Apply Teflon tape to inlet shanks and connect supply lines.

**6**

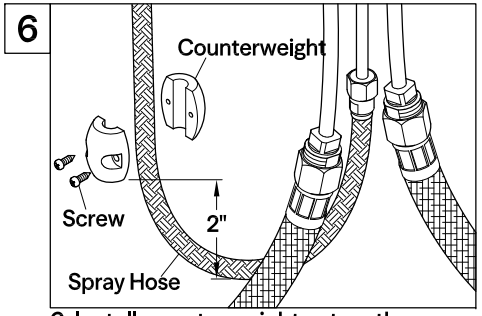



6. Install counterweight set on the spray hose.
Adjust the counterweight at least 2" higher than the bottom line as illustrated. Fix with screws tightly.

**7**

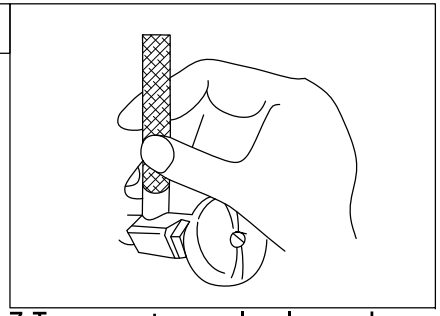


7. Turn on water supply valves and check for leaks, especially all supply line connections.

**8**

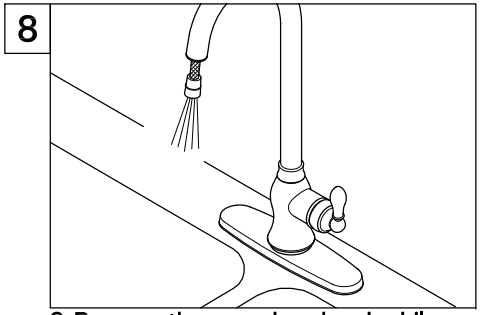

8. Remove the spray head and, while holding the hose over the drain, turn on the faucet for at least one minute. This will help clear the line of any debris. Be sure to check for leaks during this process.

**9**

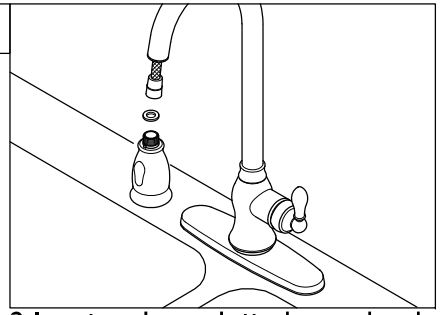

9. Insert washer and attach spray head, insert spray head onto faucet body.

### Warning!!!

- Do not over-tighten nut during installation.
- Over-tighten may crack the valve and cause severe leak.

©2025 LVC Kingston LLC. All Rights Reserved.
2025-12-G