


Instruction Battery Change

1. Use the suction cup provided in the box or use your finger to lift the clock out of the hole



2. Simply lift the clock out of the hole and change the battery

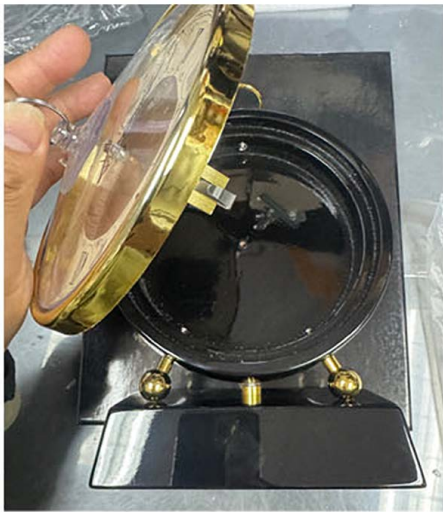

Operating Instructions

Activating & Inserting Battery

If a battery is already fitted, remove the insulation strip to activate the clock. To replace the battery insert one AA(1.5V) battery into the compartment (3) Taking care to observe the correct polarity.

Time Setting

Rotate control knob (4) to the desired time

Care of your Clock

Do replace the battery every 12 months or when the clock ceases to keep time

Cleaning: wipe clock with a dry soft cloth only

