



#### Installation wall requirements

Solid brick wall, load-bearing wall, fired hollow brick wall, wood board wall thickened insulation wall! It is not recommended to install gypsum board walls and thin plywood walls...!.

1. For solid brick walls, load-bearing walls, and fired hollow brick walls, we are equipped with 10mmwall fittings

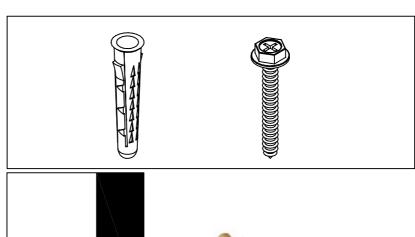

2. If it is a wooden wall (the thickness of the board needs to be at least 15 nm), please use spare screws.

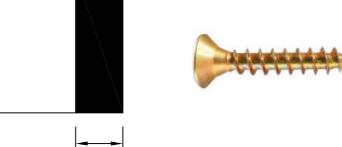

15mm

#### Product component installation sequence diagram

#### **Tools Included**




#### **Tools Required**



How to adjust the door hinge/hinge.

This screw of the door hinge can adjust the left and right clearance of the door

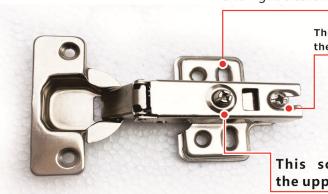


The screw on the door hinge can adjust the gap between the front and rear of the door panel and the side panel.


This screw on the door hinge can adjust the upper and lower clearance of the door panel.




#### Three-in-one fastener instructions

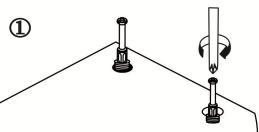



Put the screw into the corresponding hole and tighten it with a screwdriver.

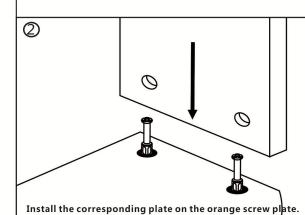


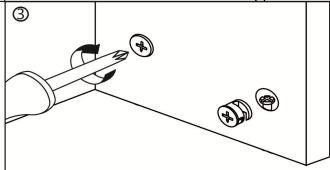



Put the screw buckle into the hole of the corresponding screw and tighten it with a screwdriver.

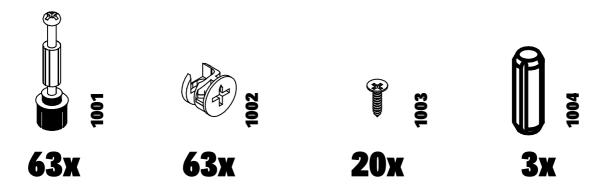


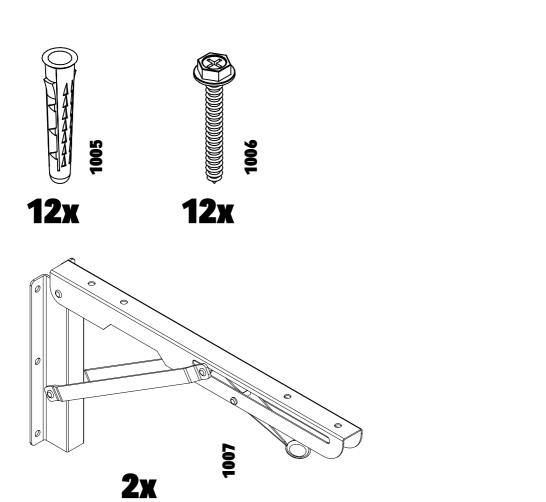


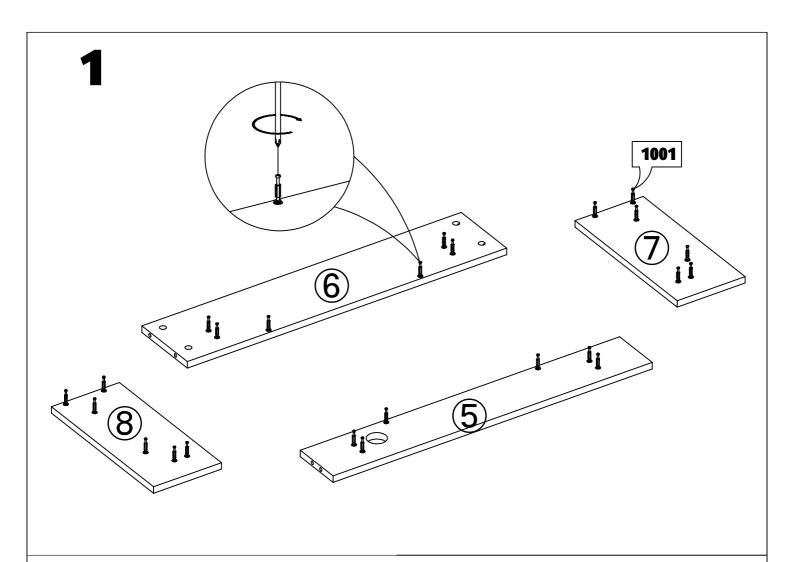


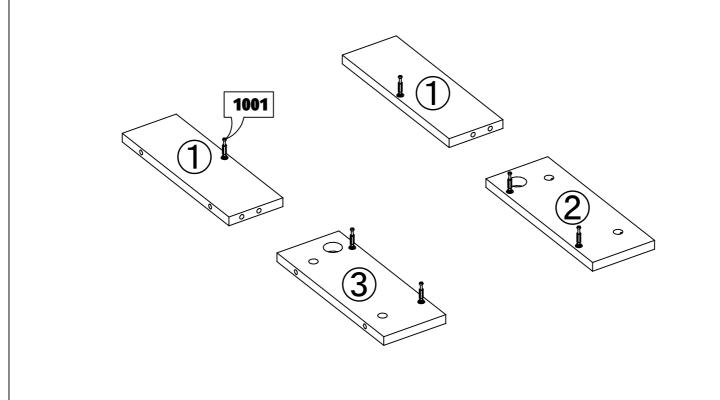


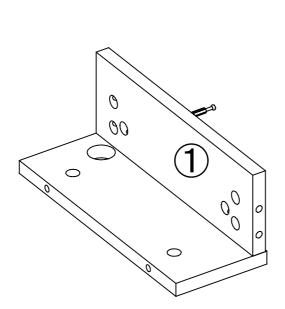


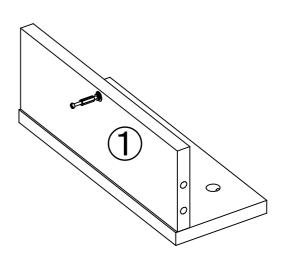


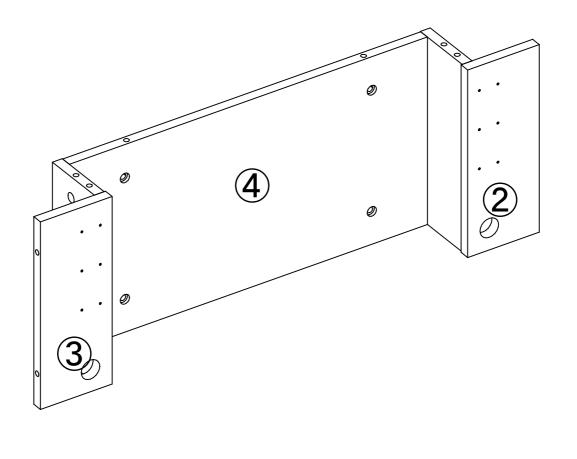


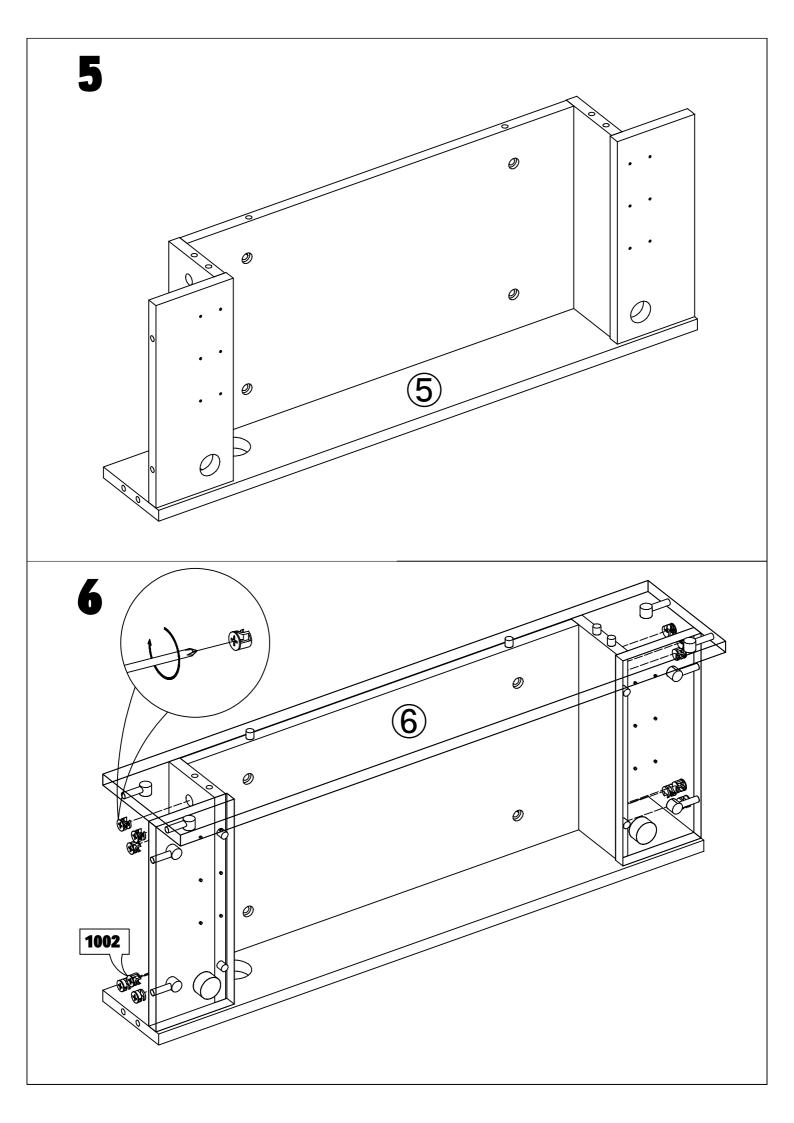


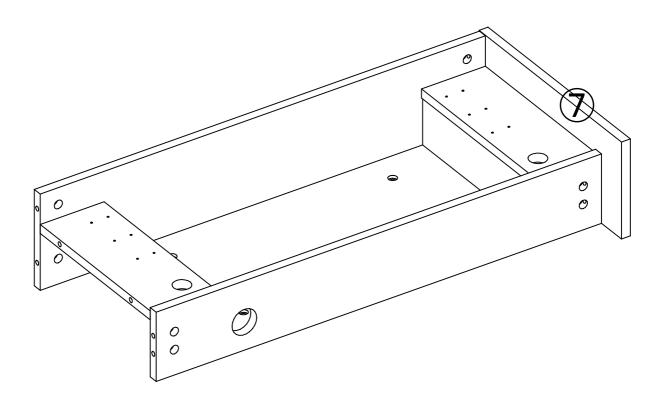


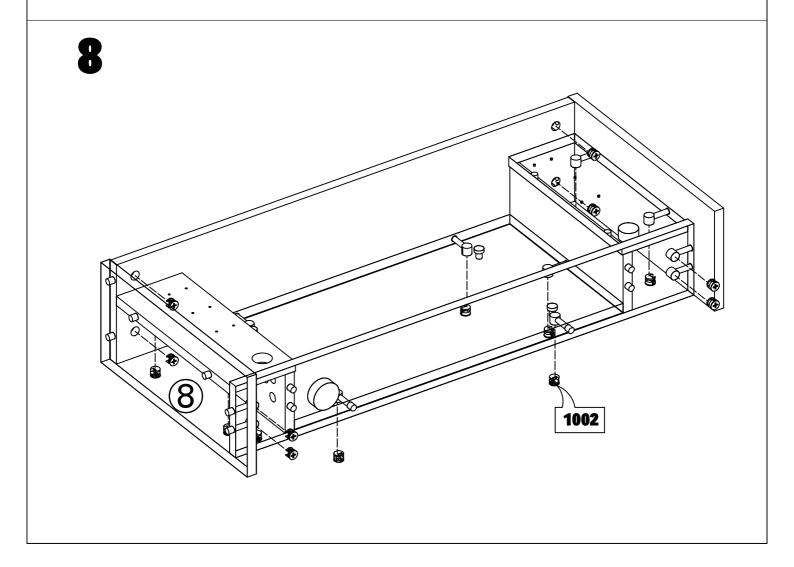


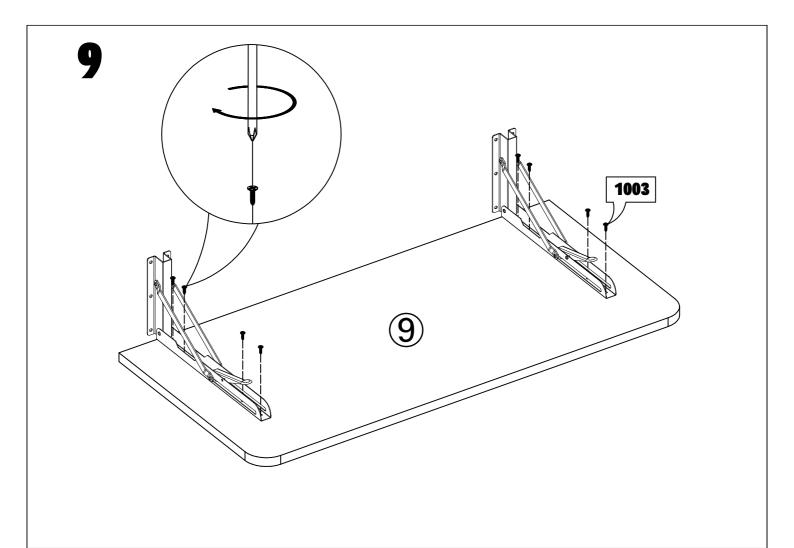


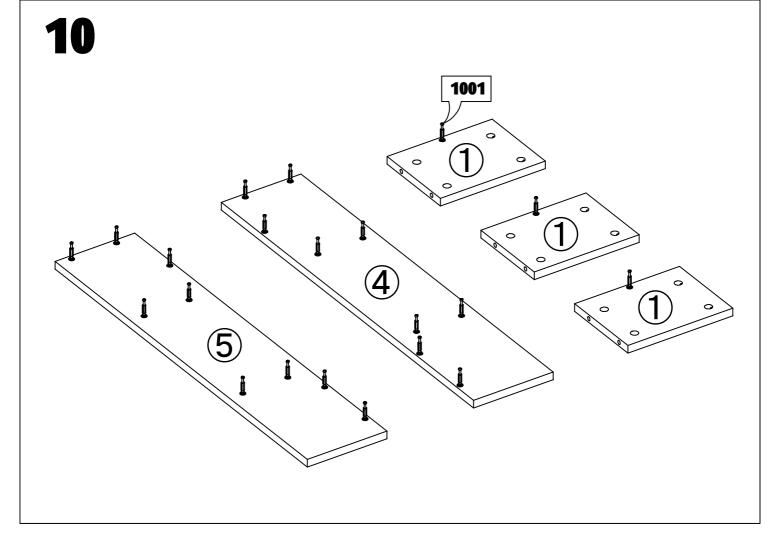


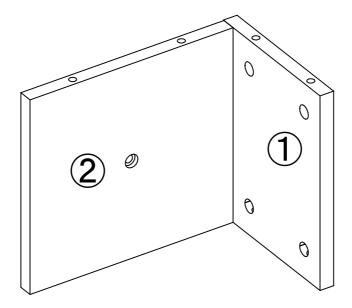


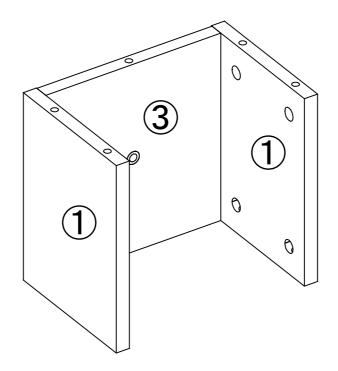


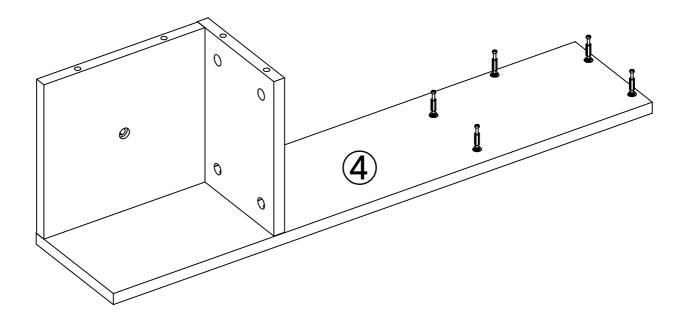


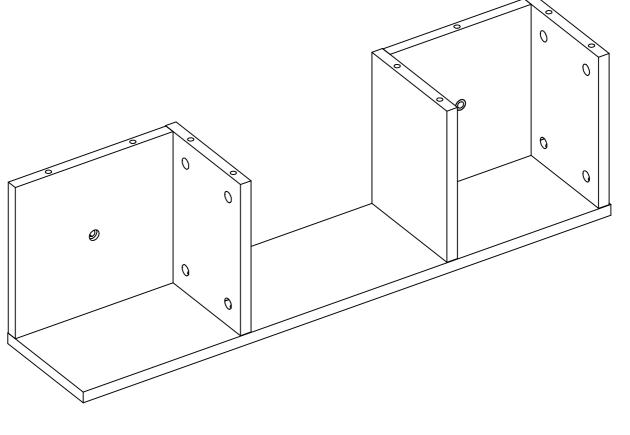


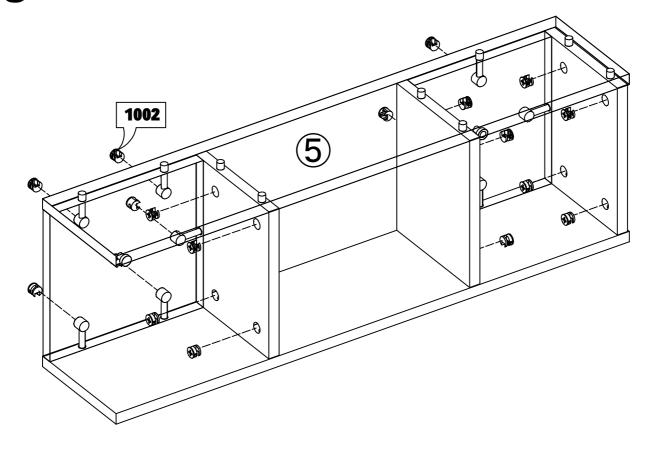

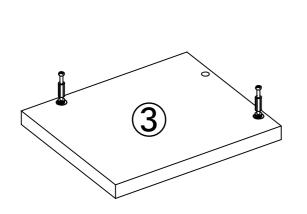

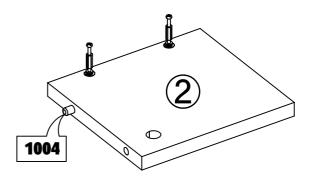

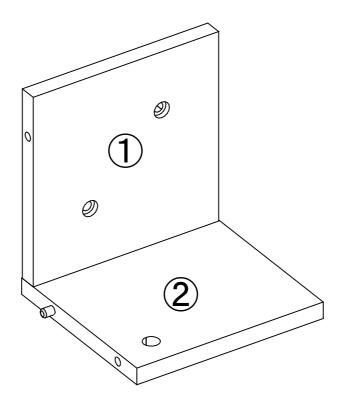

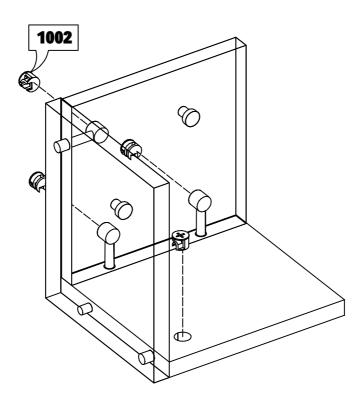

# $\mathcal{O}$