

# ASSEMBLY AND INSTALLATION INSTRUCTIONS


Item No: HWBD021-3

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


## NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

## 3-LIGHT OUTDOOR WALL SCONCE

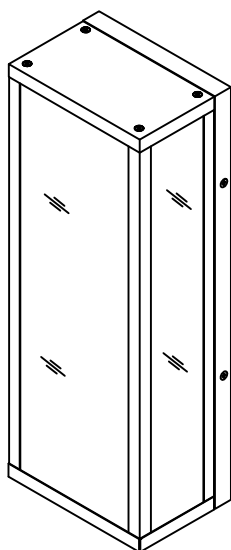

## TOOLS REQUIRED




Flathead  
Screwdriver



Phillips  
Screwdriver



Ladder




Wire Strippers



Pliers



Electrical  
Tape



Wire Cutters



Safety Glasses

## PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.

## PART LIST AND HARDWARE LIST

| PIECE | DESCRIPTION        | QUANTITY |
|-------|--------------------|----------|
| A     | Wire nut           | 3        |
| B     | Wall anchor        | 2        |
| C     | Mounting plate     | 1        |
| D     | Wooden screw       | 2        |
| E     | Green ground screw | 1        |
| F     | Outlet box screw   | 2        |
| G     | Mounting screw     | 4        |
| H     | Fixture body       | 1        |
| I     | Hardware frame     | 1        |
| J     | Decorative Nut     | 1        |
|       |                    |          |

## INSTALLATION

1. Fix the mounting plate(C) to the outlet box with outlet box screws(F), then fix the self-wooden screw(D) in the wall anchor(B).
2. Connect the power circuit grounding wire (green or bare copper wire) to the fixture grounding wire, Black to (black) and white to (white).
3. Use mounting screws (G) to connect the fixture body (H) to the mounting plate (C).
4. Install three E12 40W light bulbs (not included)
5. Hang the upper end of the hardware frame (I) into the upper bracket of the fixture body (H), align the lower hole with the threaded hole of the fixture body (H), and secure it with the decorative nut (J).

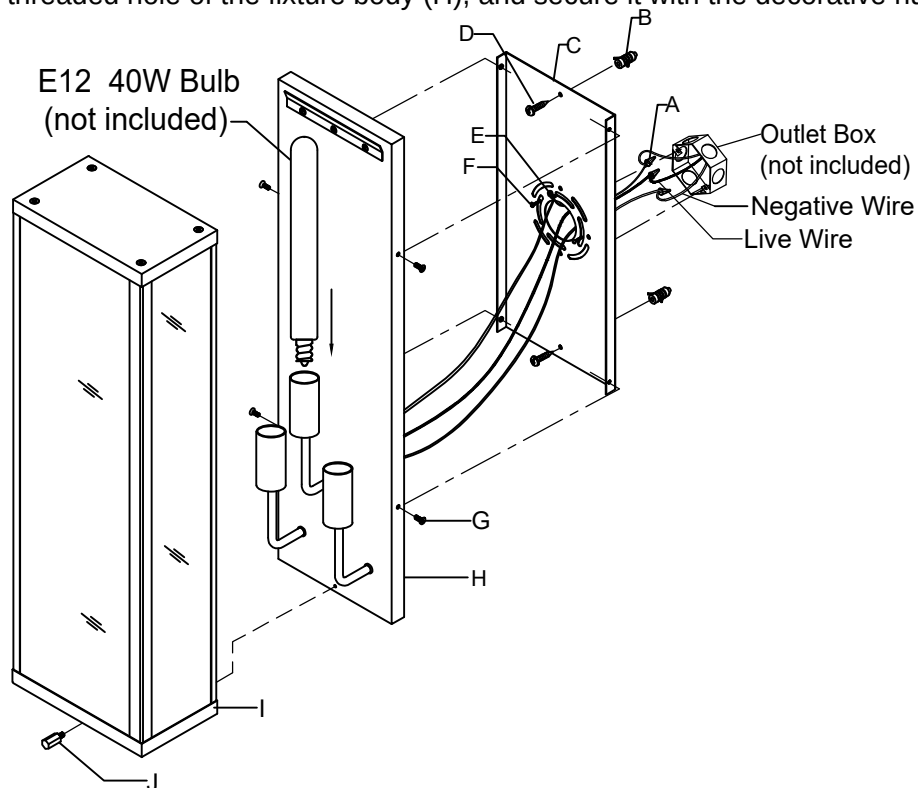

If you have any issues with use this product, please email us. Be sure to include your order number and photos of the issues. This will help us provide you with faster support and solve your problem.

 [lighting\\_service@outlook.com](mailto:lighting_service@outlook.com)