

DREAMS

IDEA

Instruction Manual



DREAMS/DEA

NO.50009GD-ICE-LH5



ASSEMBLY INSTRUCTIONS


Tel.(562)-781-3327

Please contact us: info@firstopintl.com

<https://www.dreamsidea.com>

EXPLODED

— VIEW

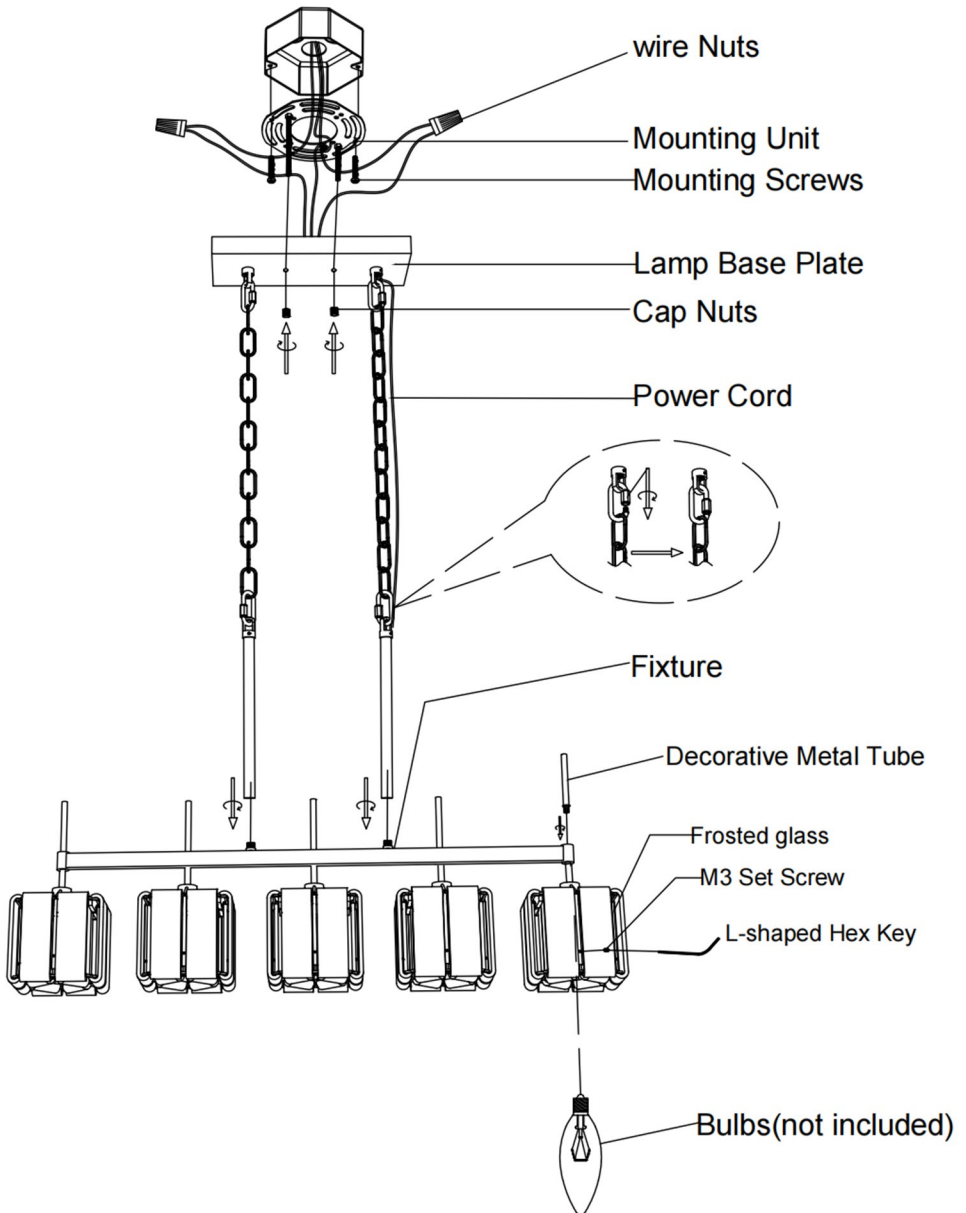

PARTS

Pre-Installation

PLANNING INSTALLATION

Read all instructions before installing.

To avoid damaging this product, place it on a soft, non-abrasive surface, such as carpet or cardboard

TOOLS REQUIRED (NOT INCLUDED)



Phillips
Screwdriver



Wire
Stripper



Pliers



Safety
Goggles



Electrical
Tape




LADDER

HARDWARE INCLUDED



3PCS



2PCS



Frosted glass*60Pcs



Decorative Metal Tube*5pcs



L-shaped Hex Key



2PCS



Mounting Unit

ATTENTION

Please inspect the wires before installation, if the wire shows any cut or abrasion, or has exposed copper wires, DO NOT use the fixture, it might be caused during transportation or defect product.

Before starting installation of the fixture, please remove the previous fixture (if any).

Disconnect the power by turning off the electric break for your property (Please ask for professional help if needed).

MAINTAINANCE AND WARNING

Verify the lamp model suits the environment (indoor/outdoor, IP rating) and check all accessories (body, screws, cord, manual).

Only use with bulbs of the recommended type and wattage. Exceeding the maximum wattage may cause overheating or fire.

Do not install the fixture if any part is damaged or missing. Contact the manufacturer or seller for replacement parts.

The fixture may become hot during use. Allow to cool before handling.


Clean dust accumulation in recessed lamps regularly (to prevent overheating), but only when powered off; never rinse with water.

If the fixture includes a dimmer switch, ensure it is compatible with the fixture before installation.

Do not modify the fixture in any way; tampering with electrical components can result in malfunction or risk of fire.

step 1 ---Mounting Unit Setup

Unscrew the cap nuts and washers from the mounting unit. Use the mounting screws to attach the mounting unit to the junction box.

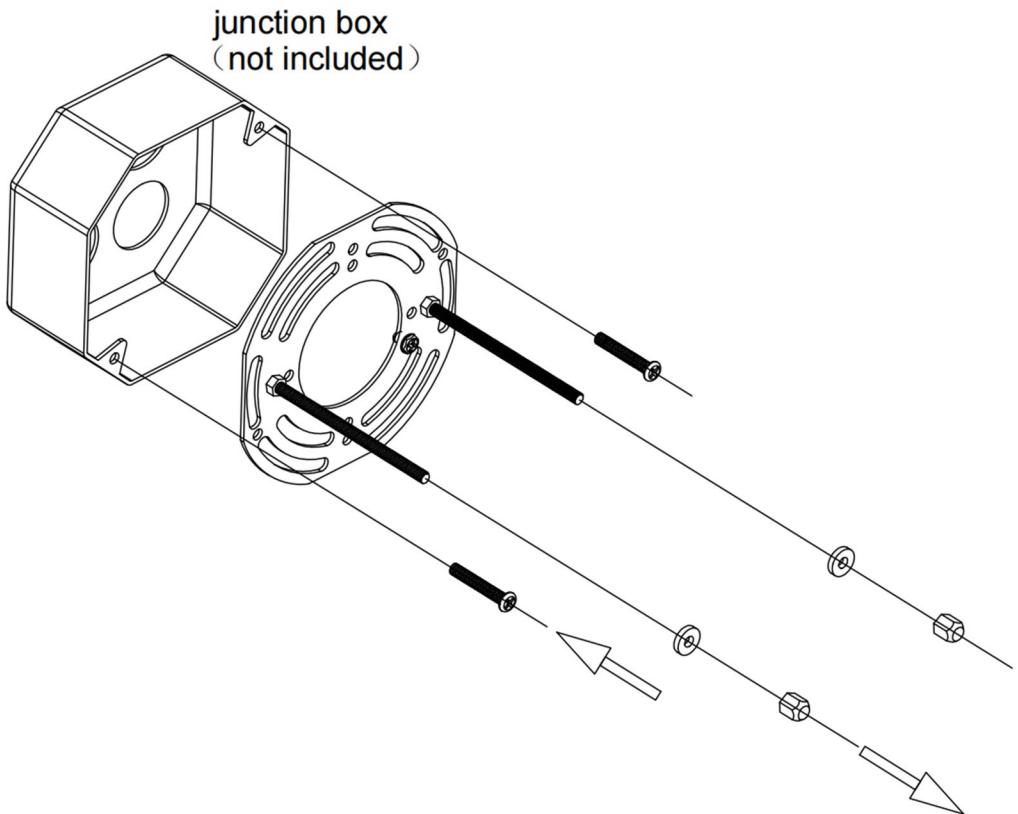

step 2 ---Electrical Wiring


Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.


Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or insulated Wire (other than green) with silver conductor

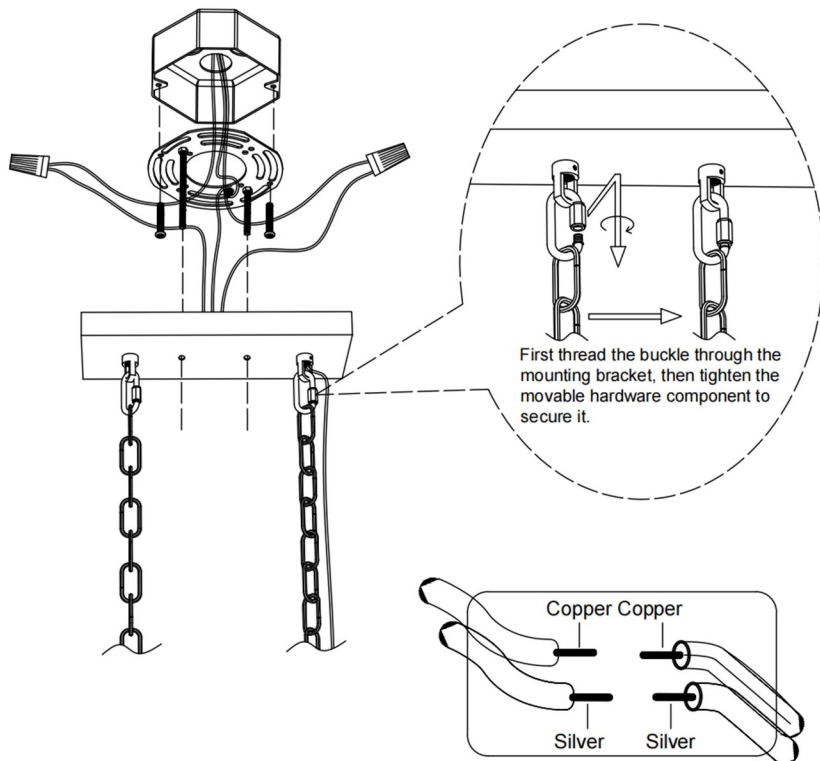

step 3 ---Backplate Installation

Insert all the Wire nuts into the junction box. Install the backplate to the mounting unit by inserting the bolts from the mounting unit through the holes on the backplate, then use the washers and cap nuts o tighten the backplate. Ensure that cap nuts are securely tightened.

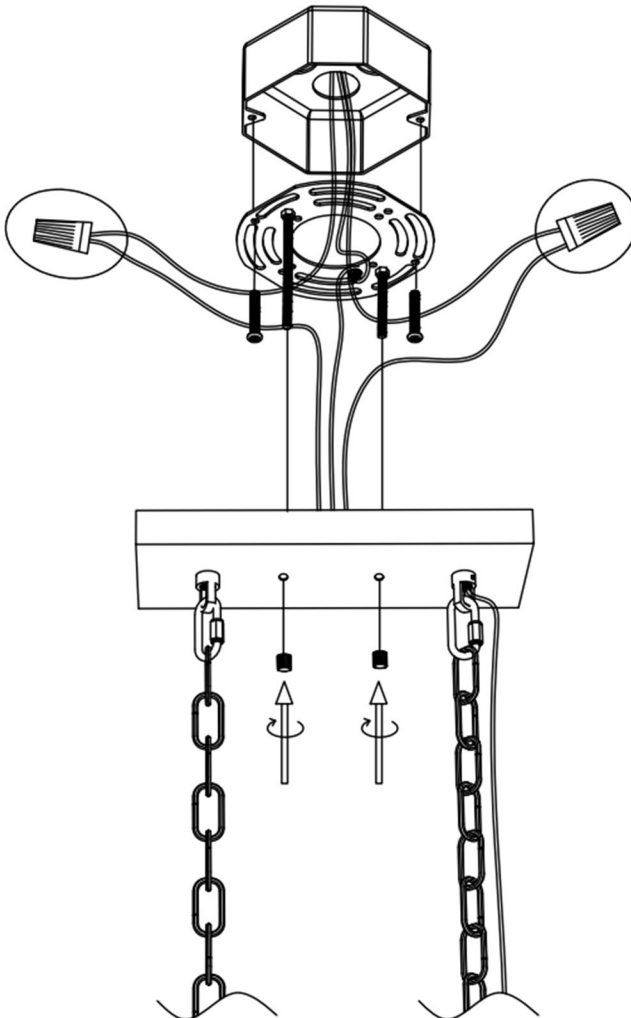


step 4 ---Bulbs and Tubes

1: Install the light bulb into the socket as shown.

(light bulb not included)

2: Thread the decorative metal tube into the lamp body.

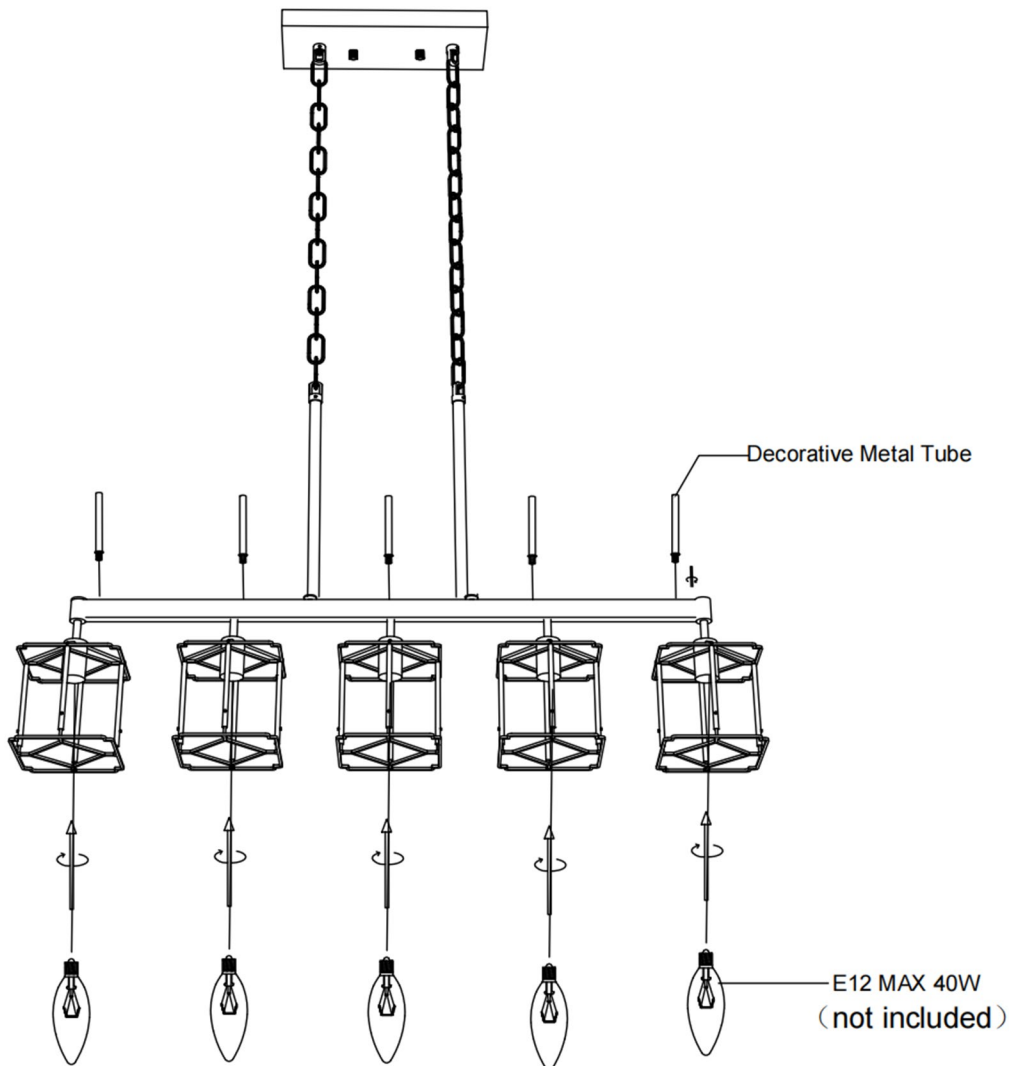

step 5 ---Glass Panel Assembly


A: The distance between the top and bottom sections of the lampshade bracket is adjustable. Loosen the fixing screws on the bracket with the hex key from the accessory pack, then the two sections can slide up and down freely.

B: Keep the lampshade bracket vertical. Adjust the distance between its top and bottom to the minimum. First hang the glass panels on the inner bracket, then mount those on the outer bracket.


C: Pull the top and bottom of the lampshade bracket by hand to secure all glass panels in place.

D: Tighten the screws on the bracket clockwise with the hex key.


A




B



B

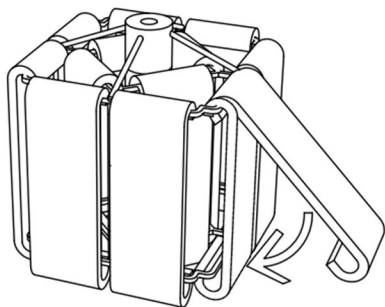

C&D

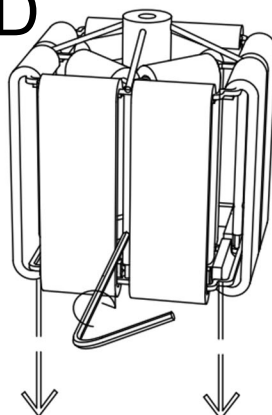

Product Overview



50009GD-ICE-LH5

