


INSTALLATION MANUAL

CEILING FAN WITH LIGHT


Model No.: CF2201Blr

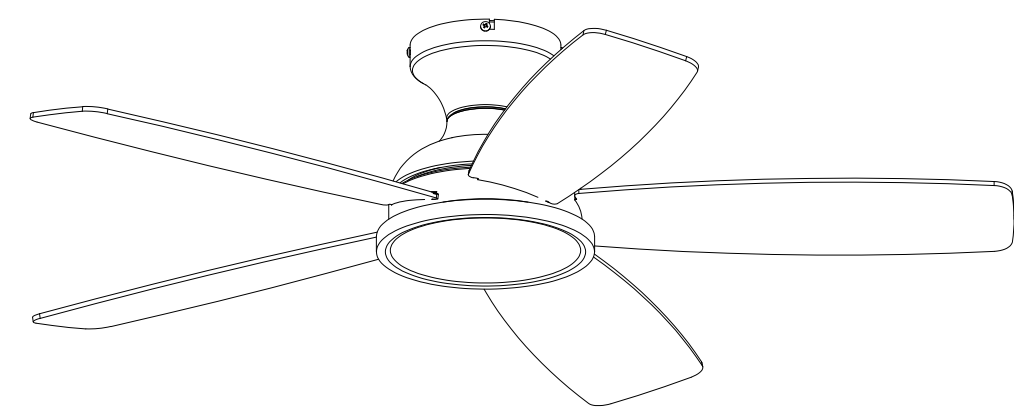

TOOLS REQUIRED




Ladder



Pliers




Wire
Strippers







Screwdrivers

PACKING LIST

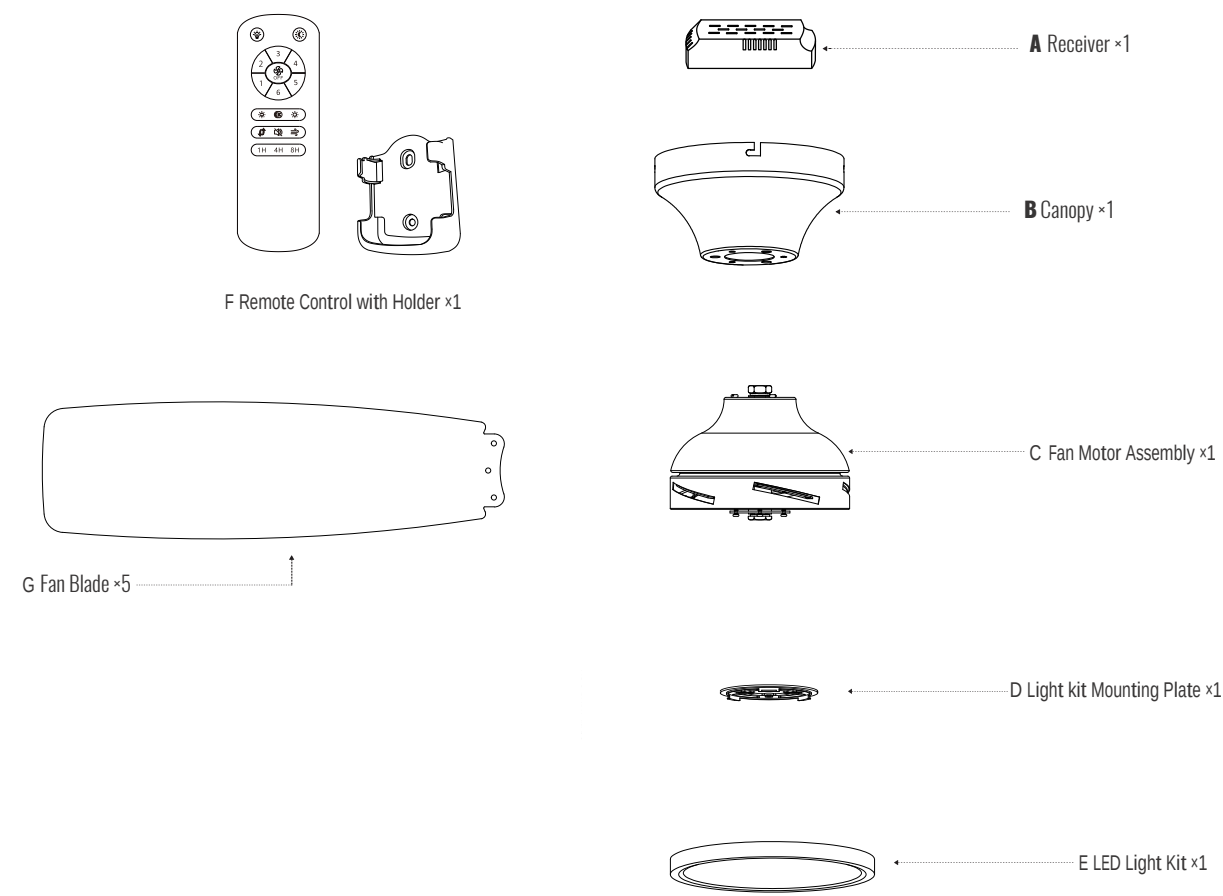

INSTALLATION KIT

AA  Mounting Bracket 1×	BB  Outlet Box Screw With Washer 2×	CC  Lock Body Washer 1×	DD  Fan Blade Screw 16×	EE  Lock Body Screw 3×
FF  Mounting Screw with Washer 4×	GG  Wire Nut 3×	HH  Gloves 1×	II  Safety cable (steel wire) 1×	

NOTE:


1. Some extra hardware may be included. The quantity listed above is the number required for installation.

2. Parts "AA" have already been installed with Canopy (B). Parts "DD/EE/FF" have already been installed with Fan Motor Assembly (C). They need to be disassembled before installation.

9. Install the Light Kit

Step 1. Connect the Light Wires from the Light Kit to the fixture wires.

Step 2. Rotate the light Kit (E) clockwise to secure it to the Mounting Plate.

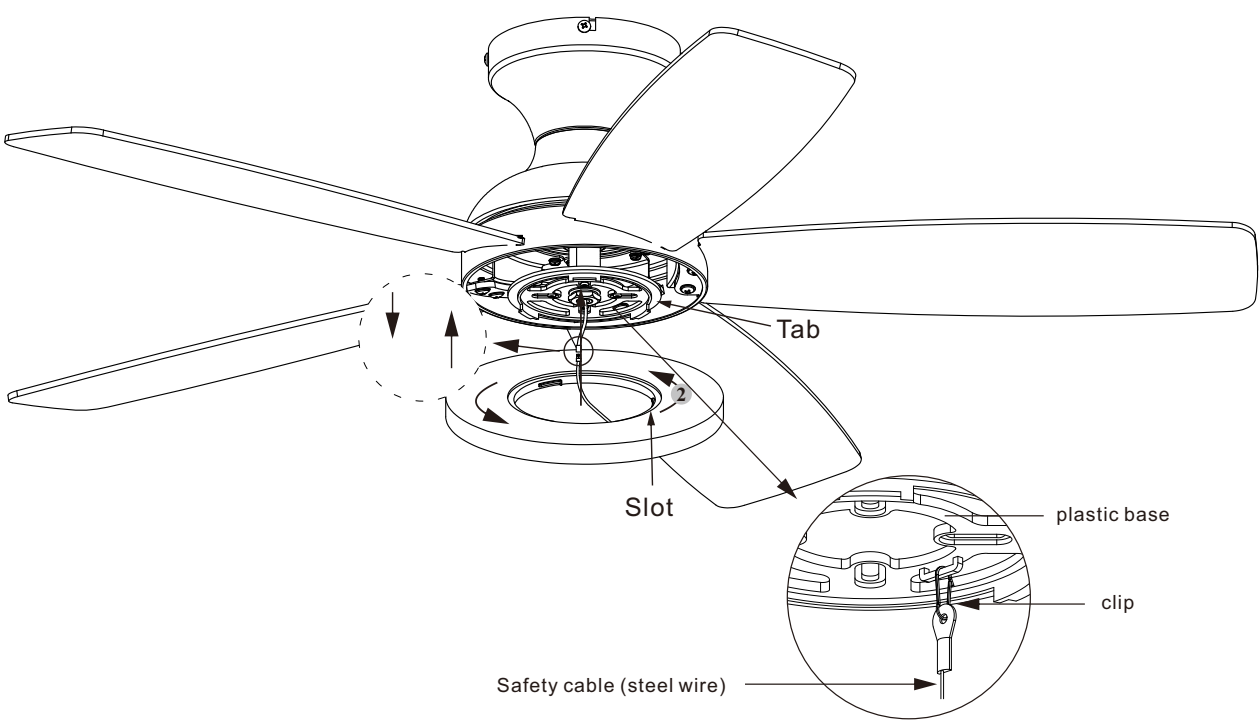


REMOTE CONTROL INSTRUCTIONS

REMOTE SIGNAL PAIRING:


If the remote control loses signal of the fan, press and hold the button ⑦ at the very beginning after it's turned on from wall switch. After the fan light flashes or beeps, it's done.

- ①: Turn on / off the light.
- ②: Turn on the fan on 1/2/3/4/5/6 speed.
- ③: Adjust the brightness of the light.
- ④: Fan moves forwards or reversely.
- ⑤: 1H/4H/8H for timing the fan.
- ⑥: Night mode, lights will be dimmed when press this button.
- ⑦: Turn off the fan.
- ⑧: Adjust the light color temperature.
- ⑨: Natural wind, fan speed will change automatically with this function.
- ⑩: Turn on/off the mute mode.

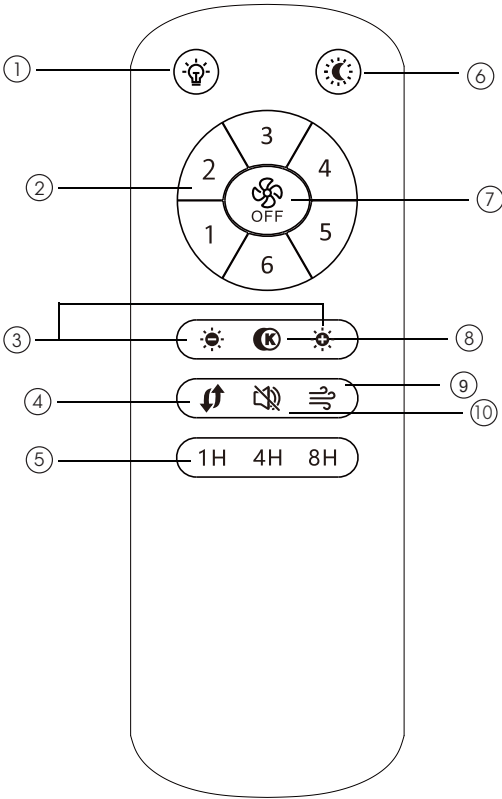

7. Remove the Light Kit Mounting Plate


Step 1. Rotate the light kit mounting plate (D),Take off light kit mounting plate from the LED light kit.

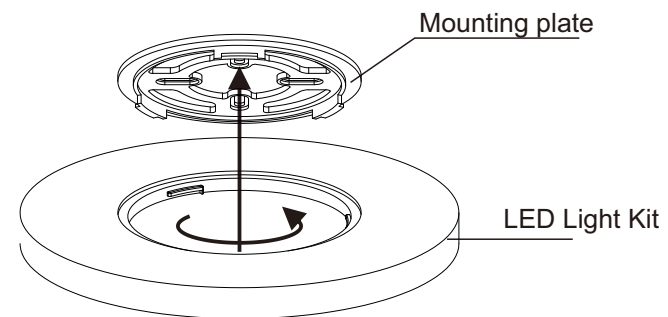

8. Install the Light Kit Mounting Plate

Step 1. Take off Mounting Screws from the Fan Motor Assembly.

Step 2. Secure the Light Kit Mounting Plate onto the Fan Mounting Assembly with screws taken off or Mounting Screws (FF) provided.

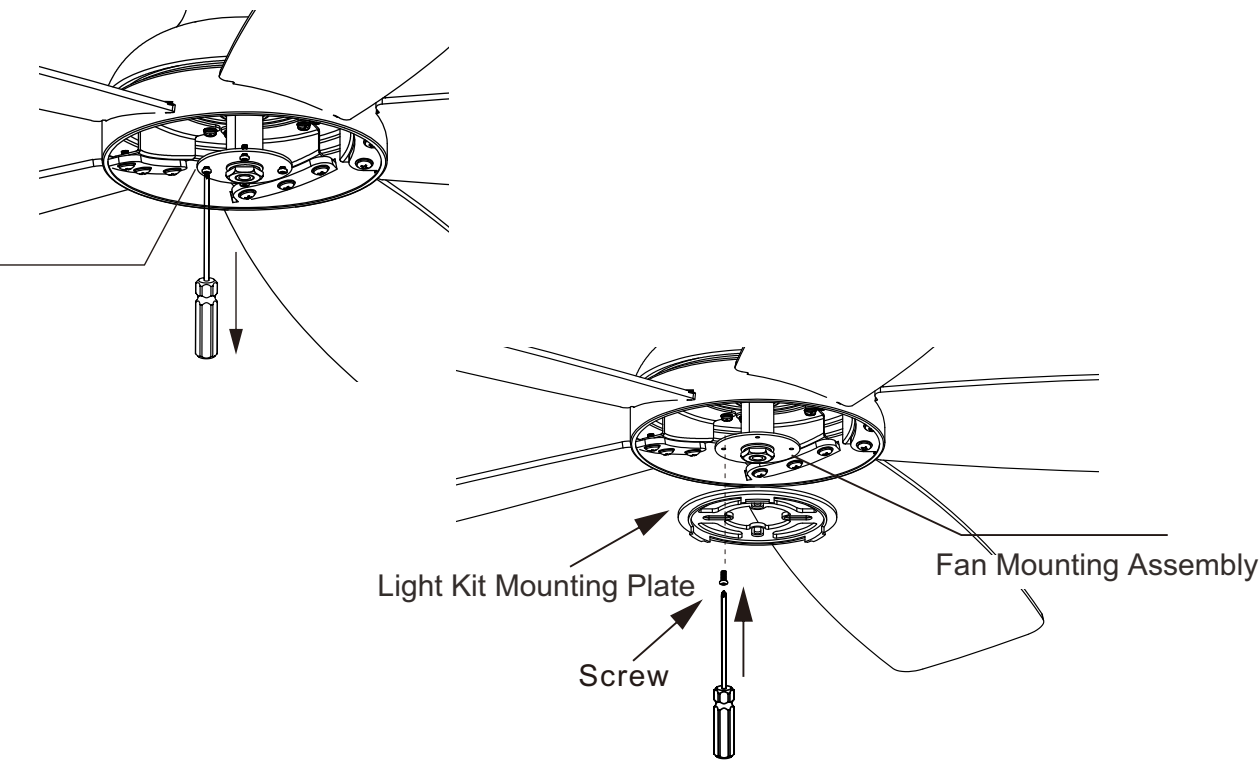


INSTALLATION

1. Remove the Mounting Bracket

Step 1. Loosen and remove the canopy screws from the round holes, and loosen the canopy screws in the 'L' holes but do not remove them.


Step 2. Take out the Mounting Bracket from the canopy.

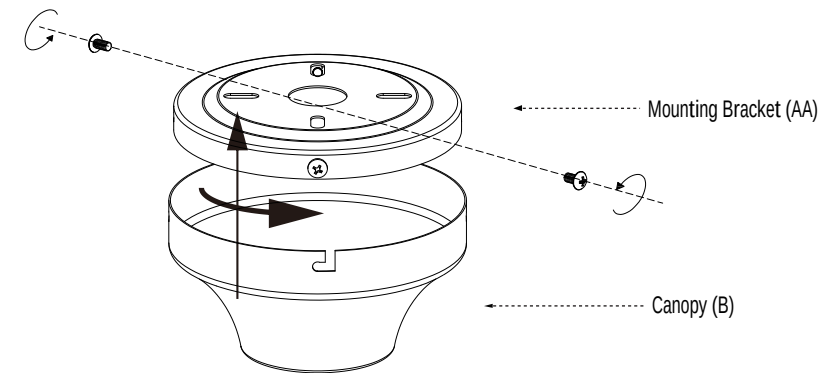

2. Install the Mounting Bracket


Step 1. Take off the screws from outlet box.

Step 2. Secure the Mounting Bracket onto the outlet box with screws taken off or Outlet Box Screw with Washer (BB) provided.

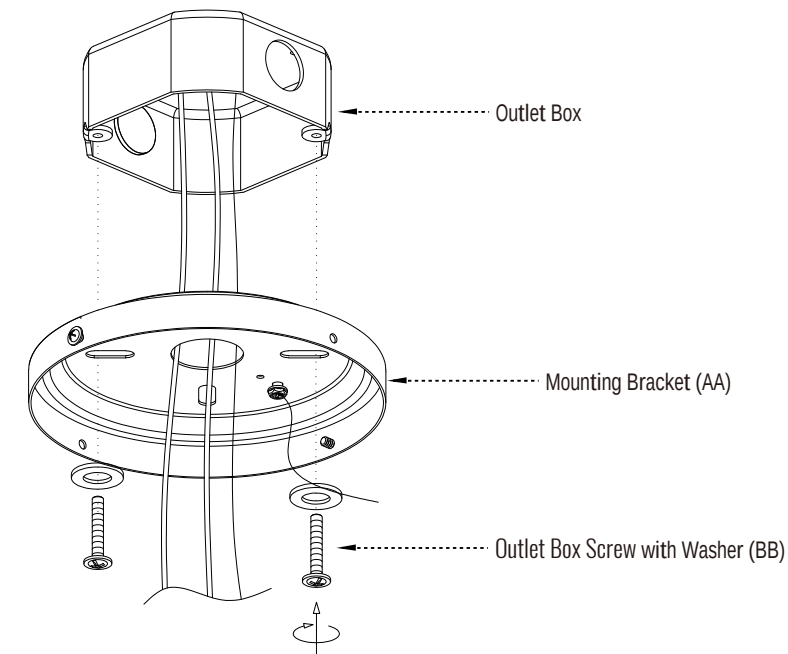


3. Installing the Fan Blade

- Step 1. Take off Fan Blade Screws (DD) from the Fan Motor Assembly.
- Step 2. Attach the Fan Blade onto the motor with the Fan Blade Screws.

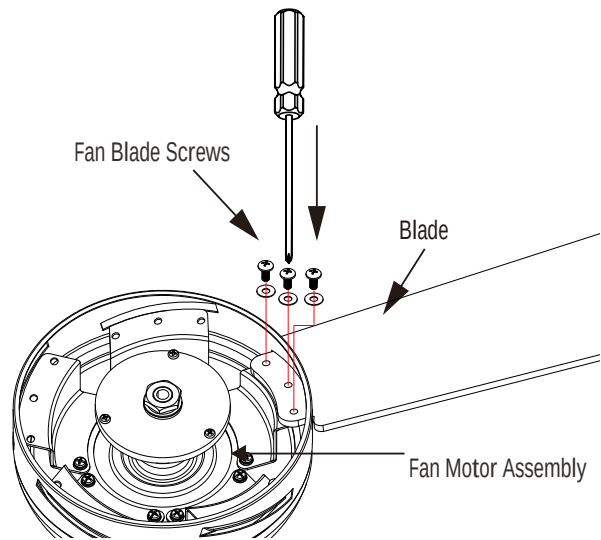


4. Assembling the Canopy

- Step 1. Thread the Main Wire through the Canopy as shown in the diagram.
- Step 2. Align the Small Holes on the Canopy with the Screw Holes on the Fan Motor Assembly, and secure the Canopy and Safety cable to the Fan Motor Assembly with Lock Body Washer and Lock Body Screw.

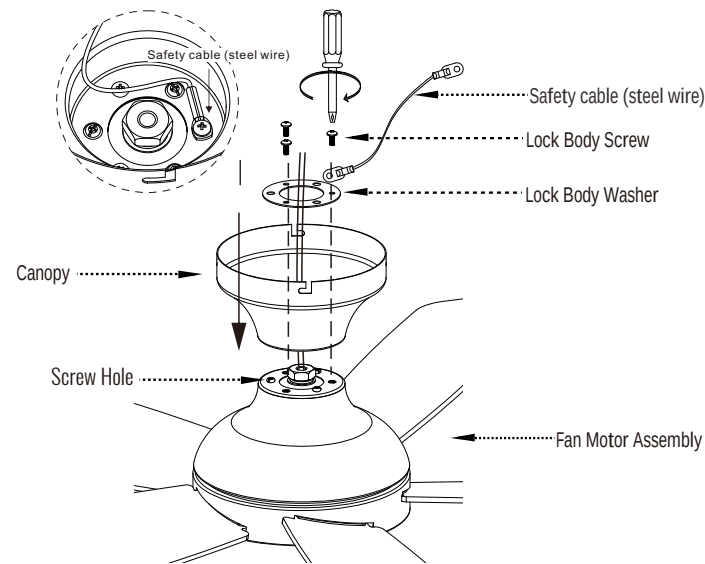

5. Wiring

- Step 1. Hang the steel cable onto the hook of the Mounting Bracket.
- Step 2. Connect the wires from the fixture to the house supply wires with Wire Nuts (GG) , ground wire (green, green/yellow, or bare copper) to ground wire, neu tral wire (white or blue) to neutral wire, and hot wire (black or brown) to the hot wire.
- Step 3. Wrap the connection with electrical tape.

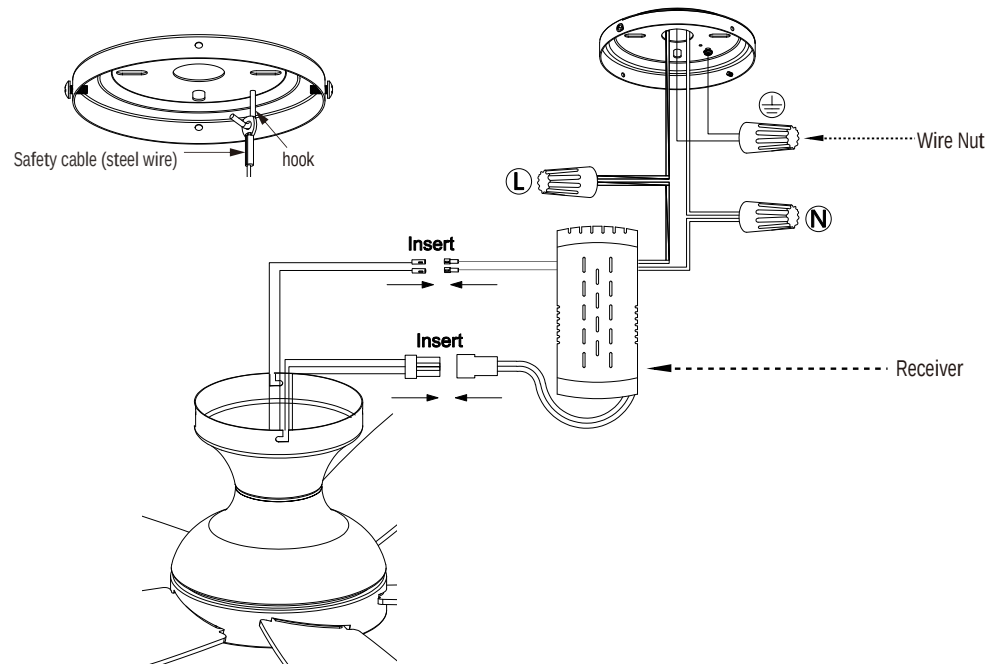

- Note:
- ① This fan only needs one set of input wires (black, white, and ground wire). Both of the fan and lights will be controlled by the remote control.
- ② This fan can only be connected to an on/off switch if you have one, not a dimmer switch.

6. Hanging

- Step 1. Align the "L" slots from the Canopy to the Canopy Screws on the Mounting Bracket , rotate the Canopy to lock it onto the Mounting Bracket.
- Step 2. Tighten the Canopy Screws to secure the Fan Assembly.

