

## SPECIFICATIONS:

### DESCRIPTION

2-4 light vanity luminaires featuring handcrafted glass.  
Multilight version of sconce.

### LAMPING

**Standard:** 40W Low-pressure G9 Halogen 120V lamp, included.

Suitable for use in an open fixture. Dimmable with standard incandescent dimmer.

**LED:** 5W LED Replaceable source 120V, dimmable, included.

### DIFFUSER

Shade shall be handcrafted glass of various decors.

5.5" Dia. x 2.5" H, spaced 7.875" apart on center.

### CONSTRUCTION

Fixture utilizes metal arm assembly and stamped steel body, with plated finish.

Decorative finials can be removed for downlighting applications. Decorative outlet box cover optional when not required.

### METAL FINISH

Fixture shall be finished in Bronze, Chrome or Satin Nickel.

### MOUNTING

Installs directly to a 4" octagonal outlet box, with 1.75" left or right offset. Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



VANITY LIGHT SHOWN IN WHITE STARPOINT WITH SQUARE CANOPY

DICRO SWIRL

BLUE MATTE

MARBLE




BI-COLOR

SUNSET

WHITE STARPOINT

MANGO STARPOINT

BLUE STARPOINT



**For ordering information, see next page**




All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

VANITIES WALL

ORDERING:

FIXTURE	GLASS OPTIONS	METAL FINISH	METAL FINISH	OPTIONS
2 Light Vanity	White	40W G9 Hal	Bronze	Square
3 Light Vanity	Marble	5W LED 120V,	Chrome	Canopy
4 Light Vanity	Sunset	dimmable	Satin Nickel	
	Blue Matte			
	Bi-color			
	White Starpoint			
	Blue Starpoint			
	Mango Starpoint			
	Dicro Swirl			

3-Light Vanity w/ Dicro Swirl Glass, Satin Nickel Finish

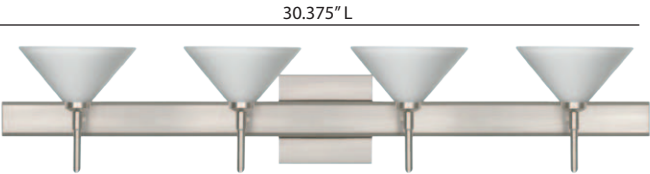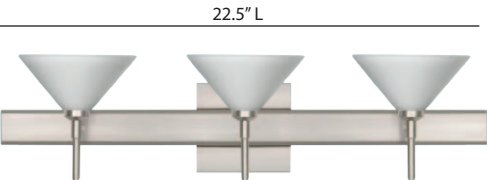

LED SCONCES:

- Total power of only 5 watts
- Dimmable with a standard dimmer
- Rated life: 25,000 hours
- 450 lumens
- CCT: 3000° Kelvin
- CRI: 80+

Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

Project Information: