Before Getting Started

- Read the instructions carefully prior to installing the product.
- When you open the package with a sharp tool like a cutter knife, be careful not to damage the components inside.
- Carefully remove all packaging materials and retain for future use.
- Keep all hardware parts and packaging out of reach of small children.
- Choose a clean, level, spacious assembly area. Avoid hard surfaces that may damage the product.
- Ensure that you have all required contents for complete assembly.
- Take care when lifting. Assemble the product in close proximity to where you intend to position the item.

WARNING: -Risk of suffocation! Keep any packaging materials away from children.
-Make sure power is completely off at the fuse box.
-Have your fixture installed by a qualified licensed electrician.

Cleaning & Maintenance

- For respective shade surfaces, use the appropriate cleansers, i.e. glass cleaner, acrylic polish, and wood polish.
- Clean with soft cloth and a mild detergent. DO not use abrasive cleaner.
- Periodically (every 90 days) make sure that the screws are fully tightened.
- Prolonged exposure to heat sources may cause glazing, melting and scorching, or even cause color to fade.

NOTE



Always use UL recognized wire connectors for connections.



Indoor use only.




Dry location only.

ilucezzo

INSTALLATION SHEET

630888-022

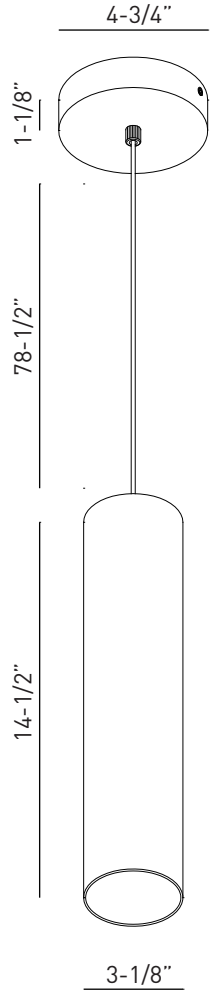

ZHONGSHAN GUZHEN LCZ LIGHTING & ELECTRICAL EQUIPMENTS FACTORY
NO.480, DONGAN NORTH RD., GUZHEN, ZHONGSHAN, GUANGDONG, CHINA
TEL: 86-760-22310601

ADDITIONAL PARTS (included)



Mounting Screw
(x2)



mounting plate
(x1)




Wire Nut
(x3)




Allen Key
(x1)

INSTALLATION INSTRUCTIONS

1 Install mounting plate to junction box with mounting screws supplied. Make sure black and white wires of junction box run through the middle opening of the mounting plate.




2 Set the fixture hanging height, loosen the wire lock nut at the canopy where the wire comes out from. Push the wire up to shorten, or pull the wire down to lengthen. When you have selected your desired length, just tighten back the nut and the wire will be held tightly in place.




3 To make the connections in the compartment: use the included wire nut to match the white wire from the line feed with the white wire from the fixture, repeat with black wire and then connect copper wire (ground) to the green wire. (see connection details)

CONNECTION DETAILS




4 Push all the wires inside the junction box and secure the fixture on the mounting plate using the 2 screws.

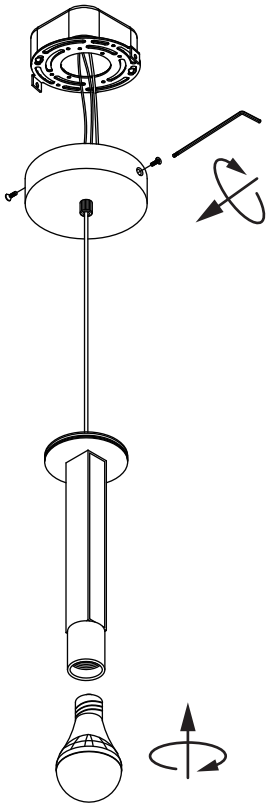

5 Install 12W Max. type LED A19 bulbs (not included) into sockets.
Note: For better light output, recommend to use with LED bulb PAR20 or A19.

6 Twist the lampshades onto the fixture.

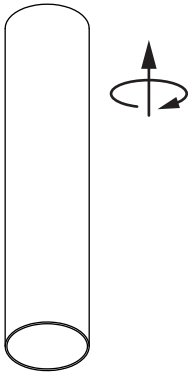

ilucezzo

ZHONGSHAN GUZHEN LCZ LIGHTING & ELECTRICAL EQUIPMENTS FACTORY
NO.480, DONGAN NORTH RD., GUZHEN, ZHONGSHAN, GUANGDONG, CHINA
TEL: 86-760-22310601