

Decorative stand




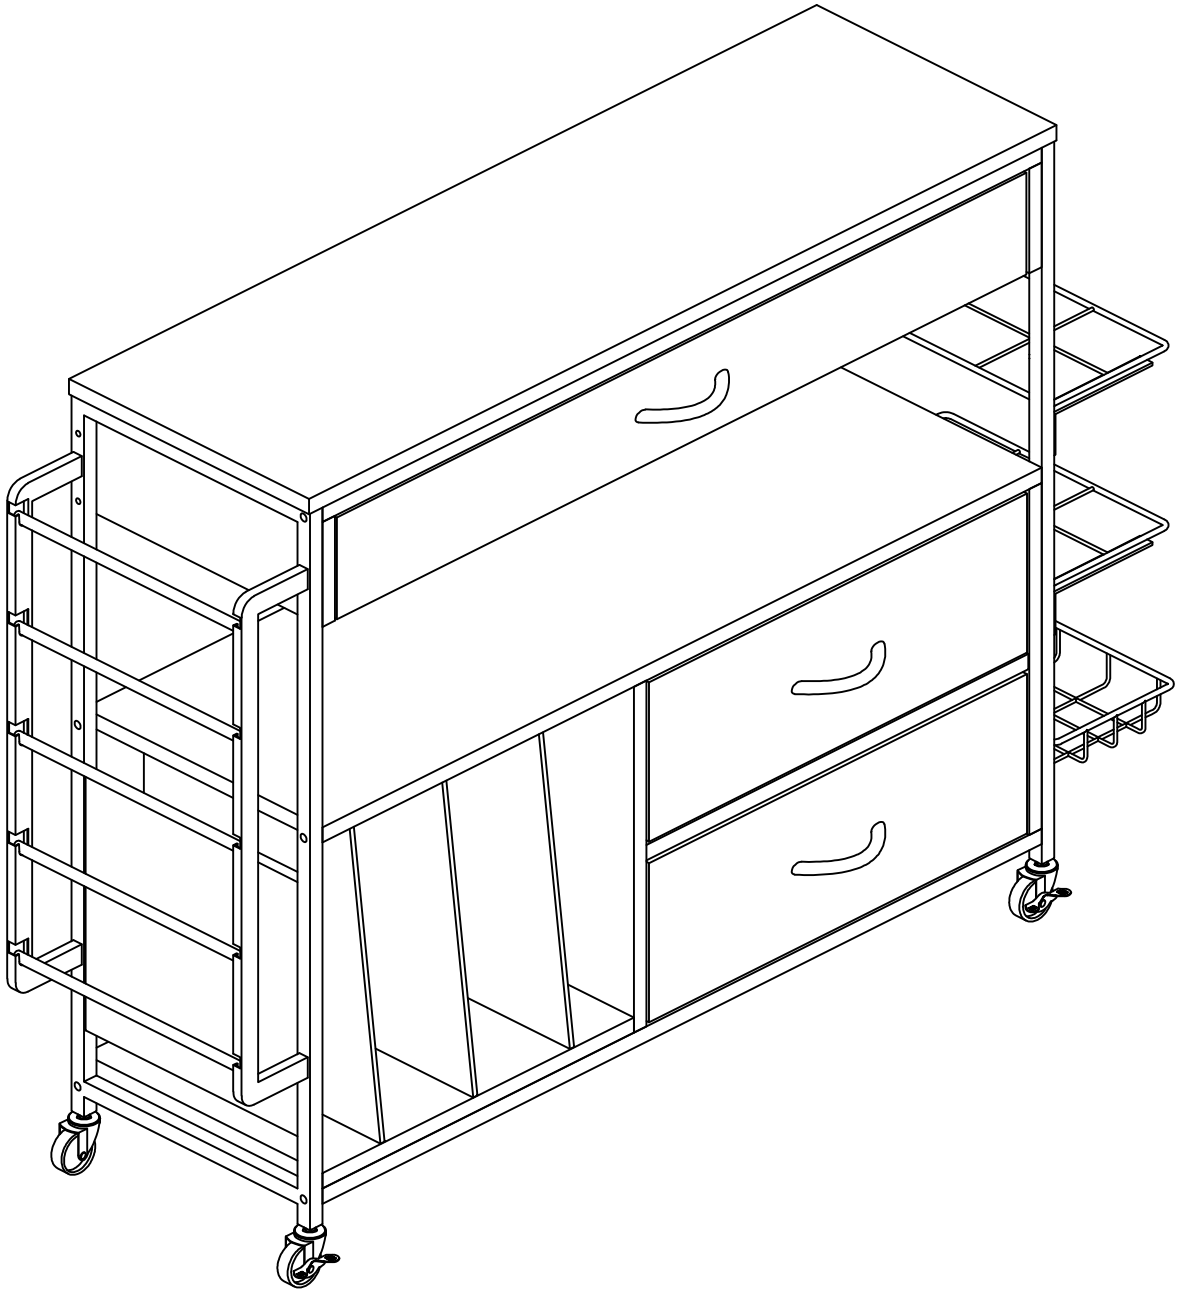





version : 3.0




ASSEMBLY INSTRUCTIONS




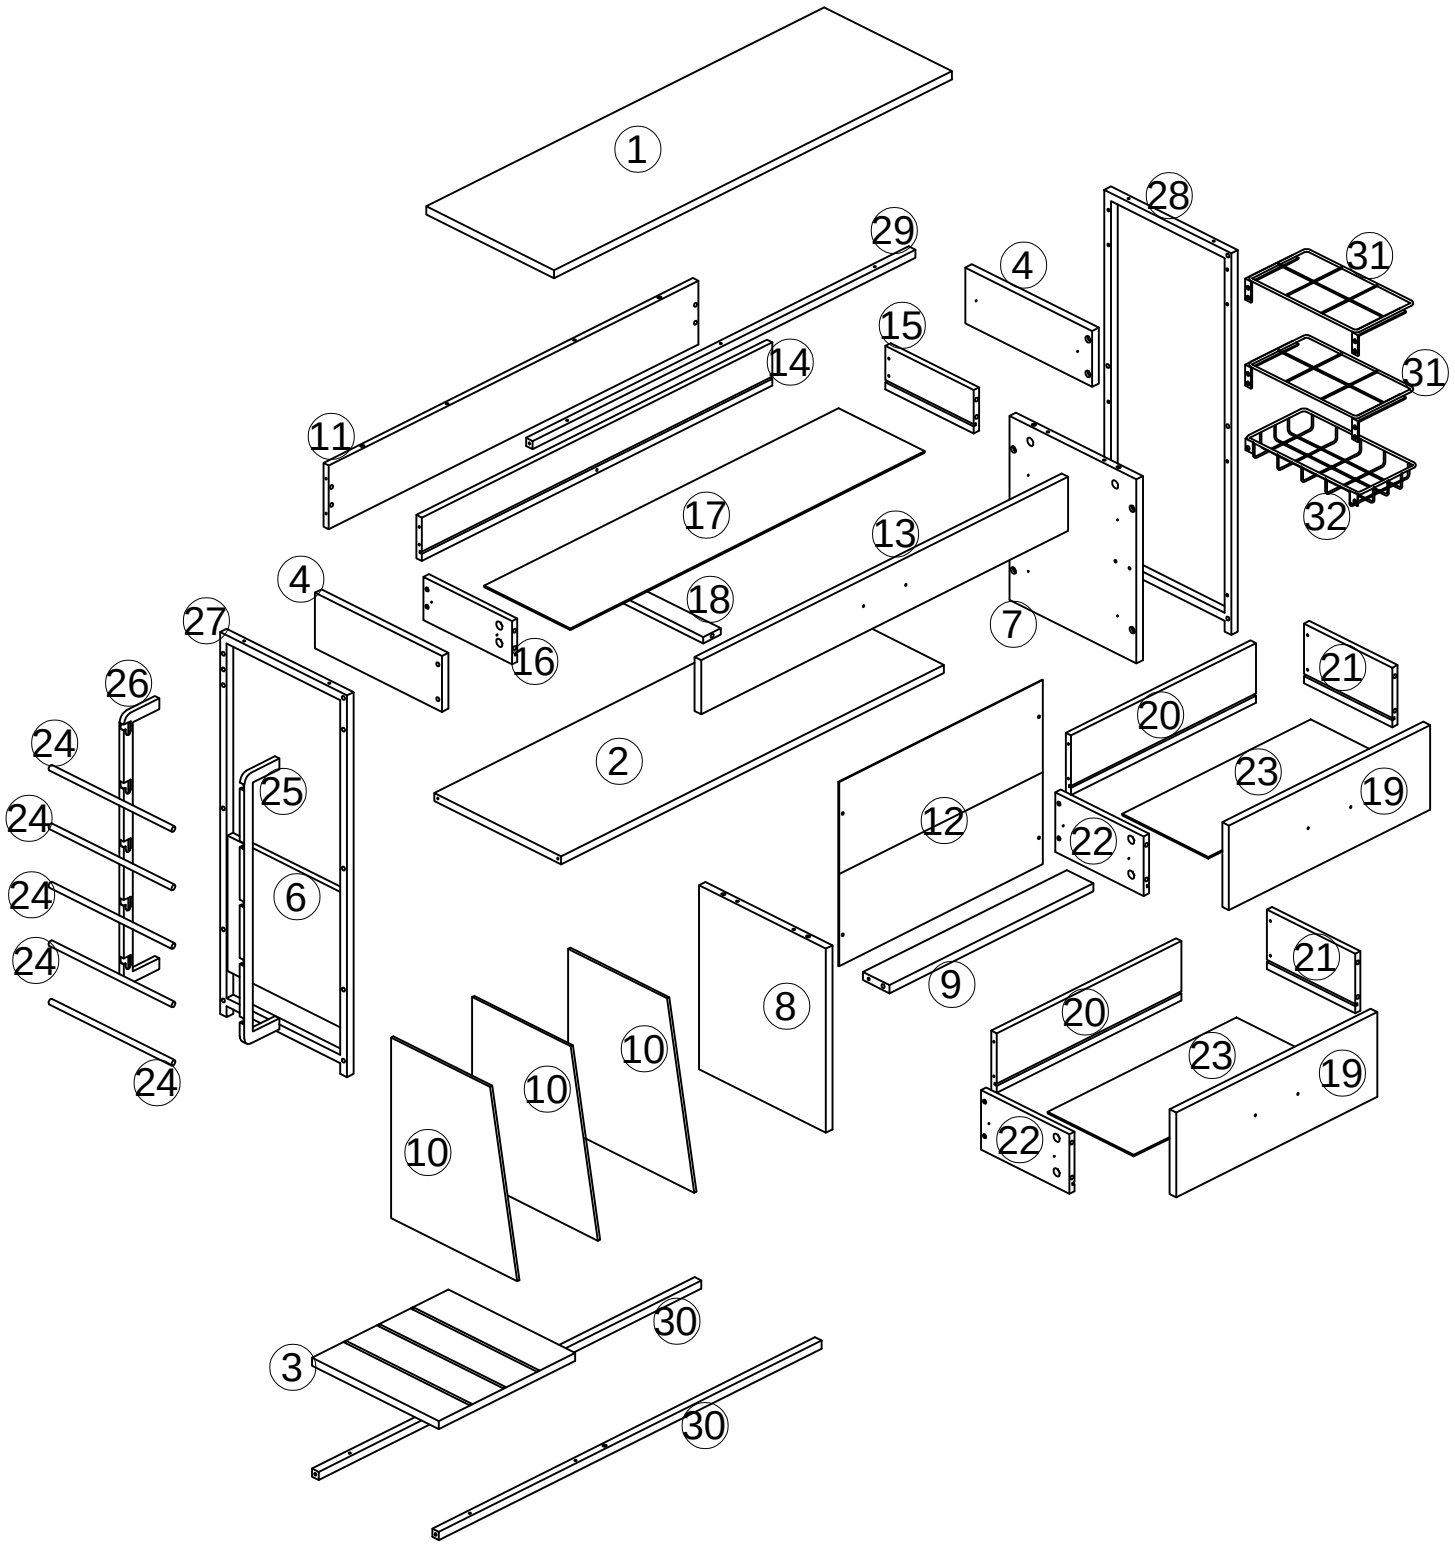


ASSEMBLY INSTRUCTIONS
































A x8	B x21	C x21	D x27	E x11
				
Ø6x30mm	Ø6x35mm	Ø15x10mm	Ø5x38mm	Ø7x4x25mm
spare:1	**spare:1**	**spare:1**	**spare:2**	**spare:1**

F x3	G x34	H x3	I x6	J x10
				
L=250mm	Ø7x3.5x12mm		M4*15mm	M6*35mm
	spare:2		**spare:1**	**spare:1**


K x8	L x10	M x2	N x2	O x15
				
M6*20mm	M6*12mm			
spare:1	**spare:1**			**spare:2**

Px4			
			
Ø7x3.5x14mm			
spare:1			


ASSEMBLY INSTRUCTIONS

1  X1	2  X1	3  X1	4  X2
6  X1	7  X1	8  X1	9  X1
10  X3	11  X1	12  X1	13  X1
14  X1	15  X1	16  X1	17  X1
18  X1	19  X2	20  X2	21  X2
22  X2	23  X2	24  X5	25  X1
26  X1	27  X1	28  X1	29  X1
30  X2	31  X2	32  X1	


STEP 1

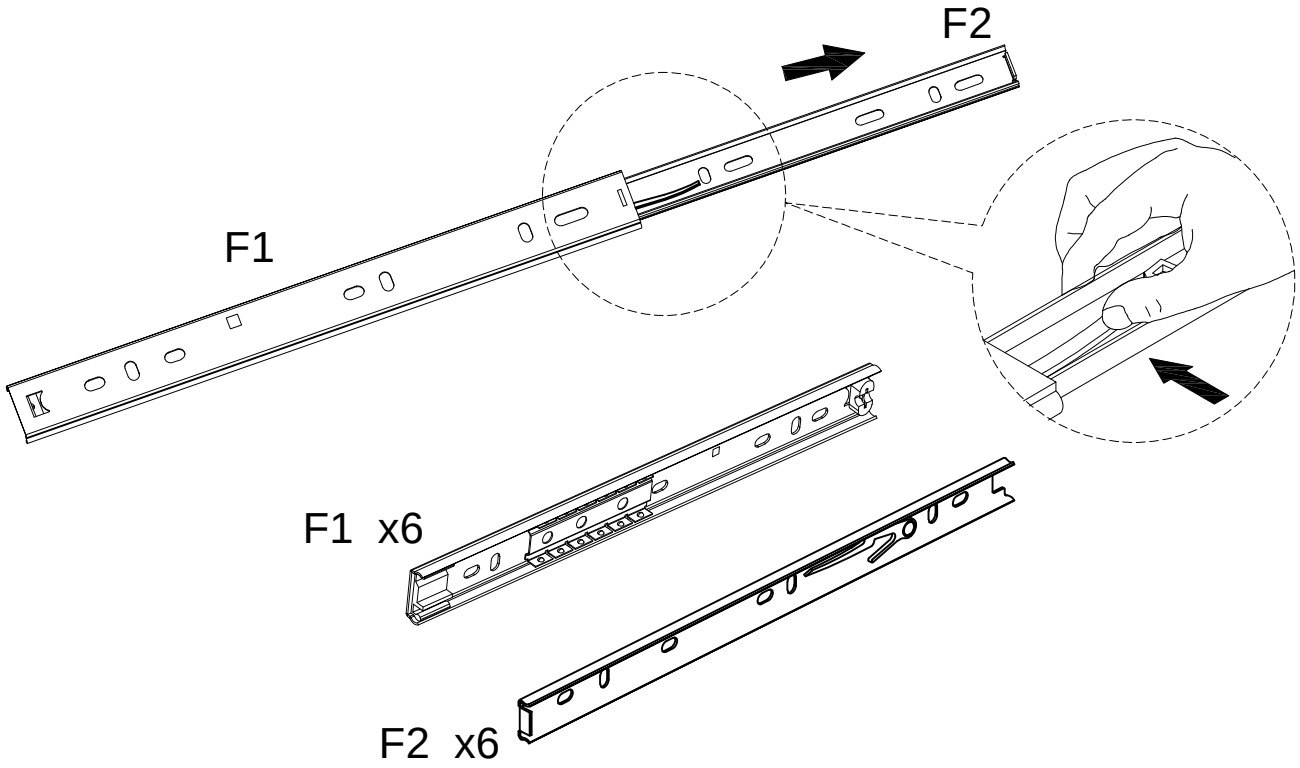

F	X3




STEP 2

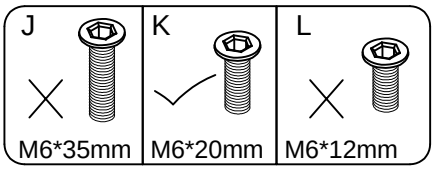



After locking all 6 screws K into the holes, tighten them

K	X6



STEP 3

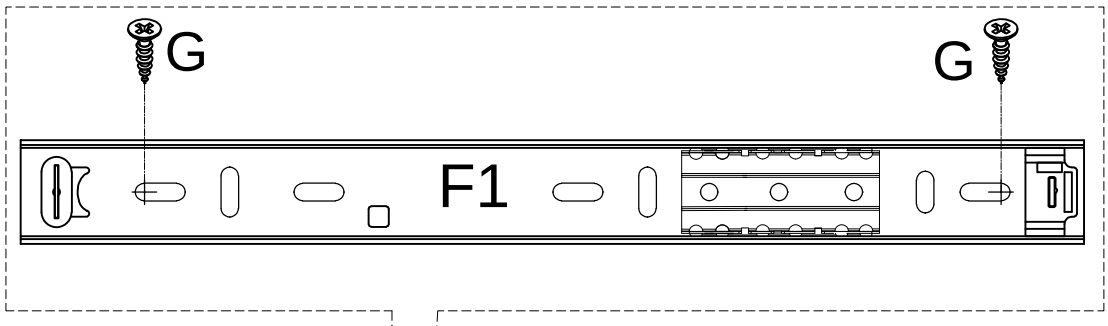


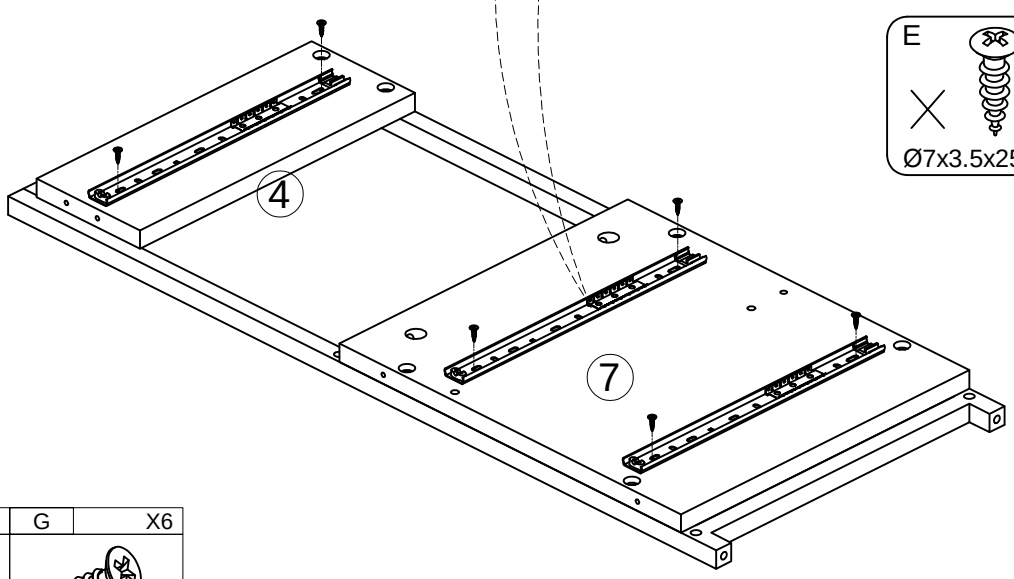


E	G
Ø7x3.5x25	Ø7x3.5x12


F1	X3	G	X6
			

STEP 4

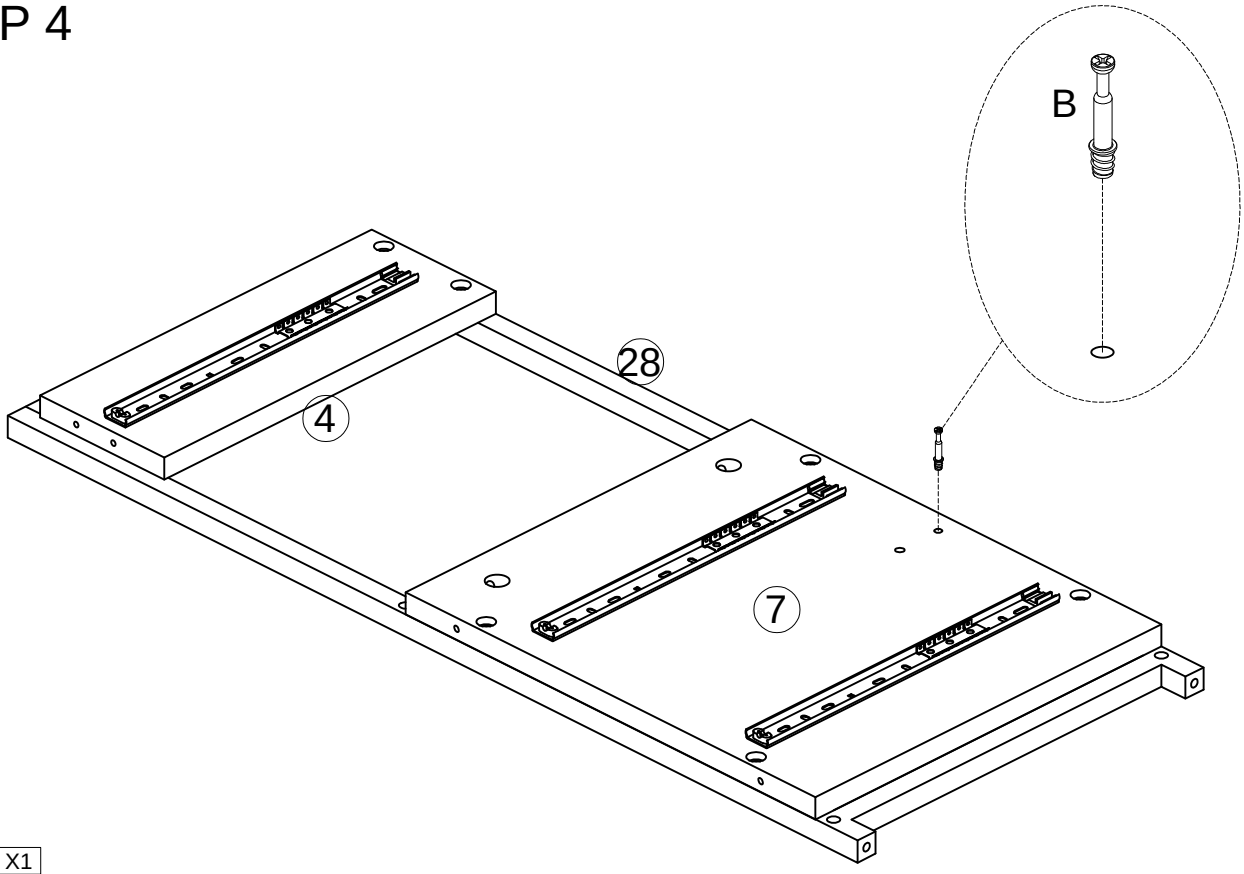


B	X1
	


STEP 5

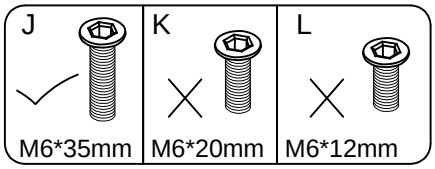


A	X1	C	X1	J	X1

STEP 6

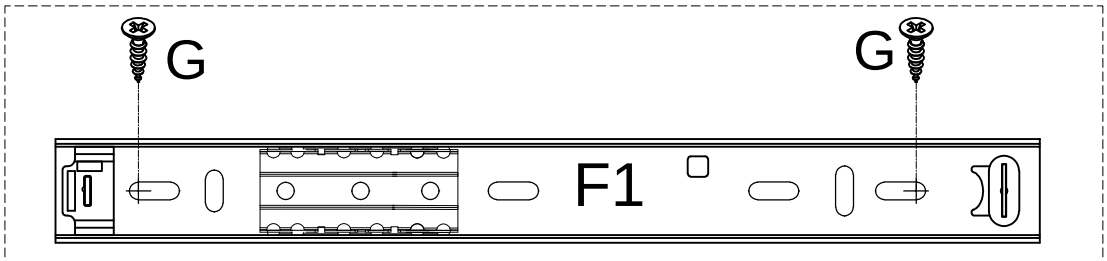


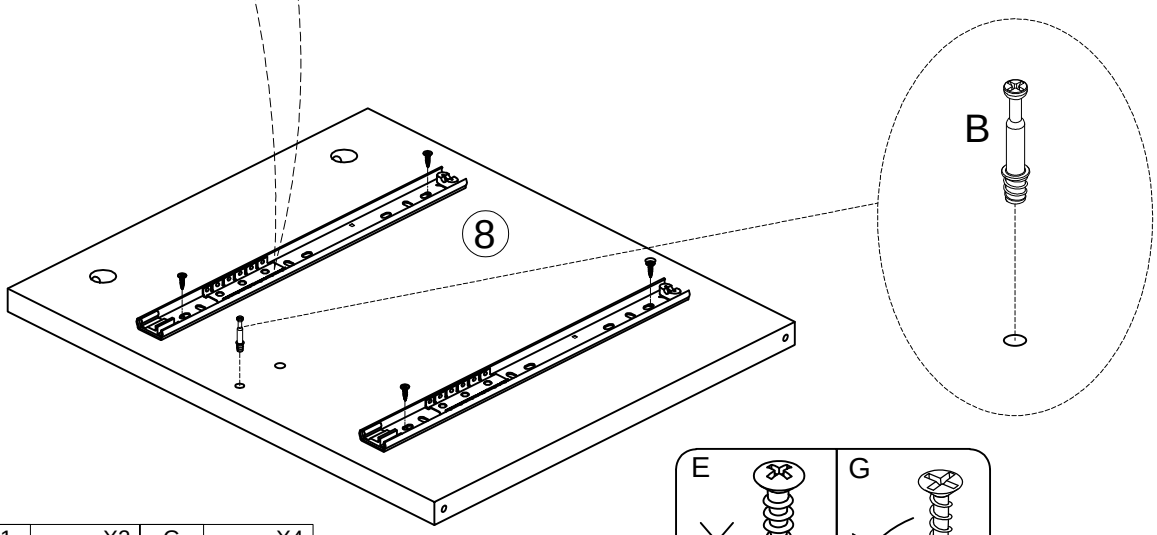

B	X1	F1	X2	G	X4





STEP 7

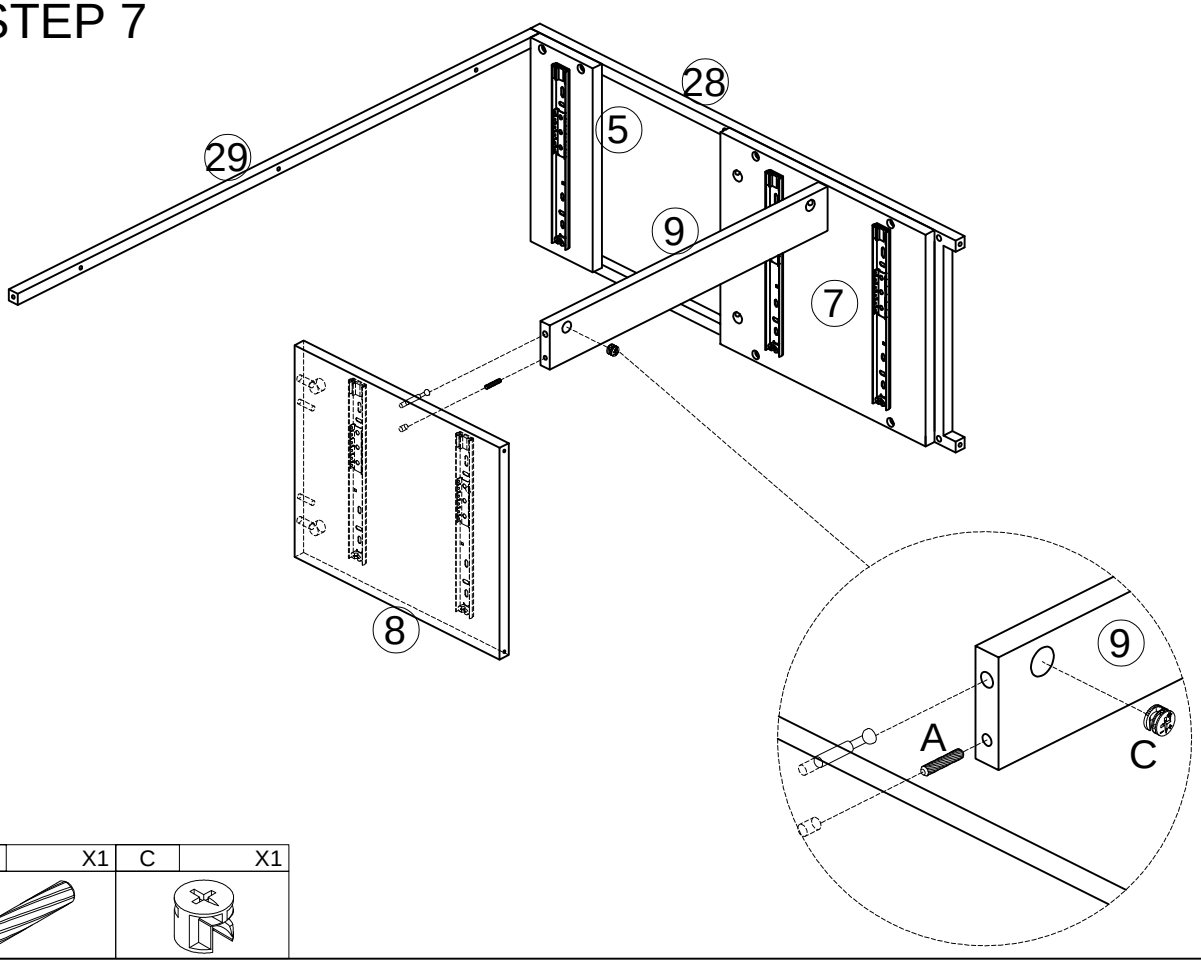


A	X1	C	X1

STEP 8

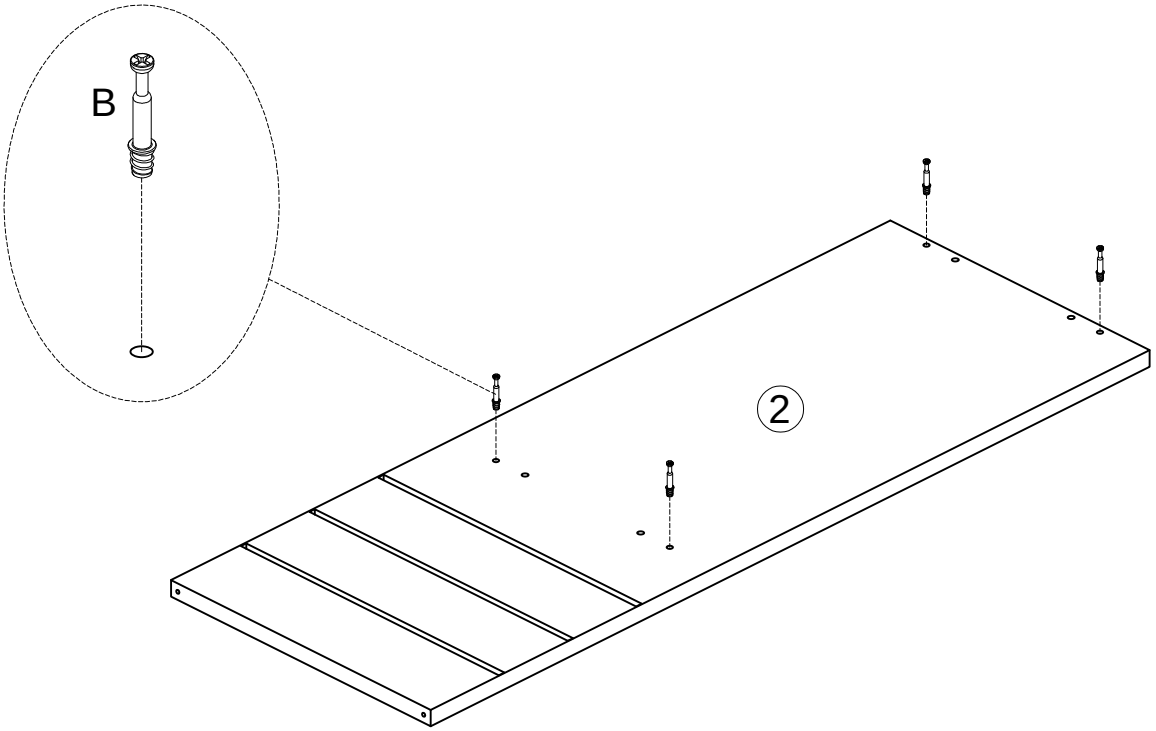


B	X4
	

STEP 9

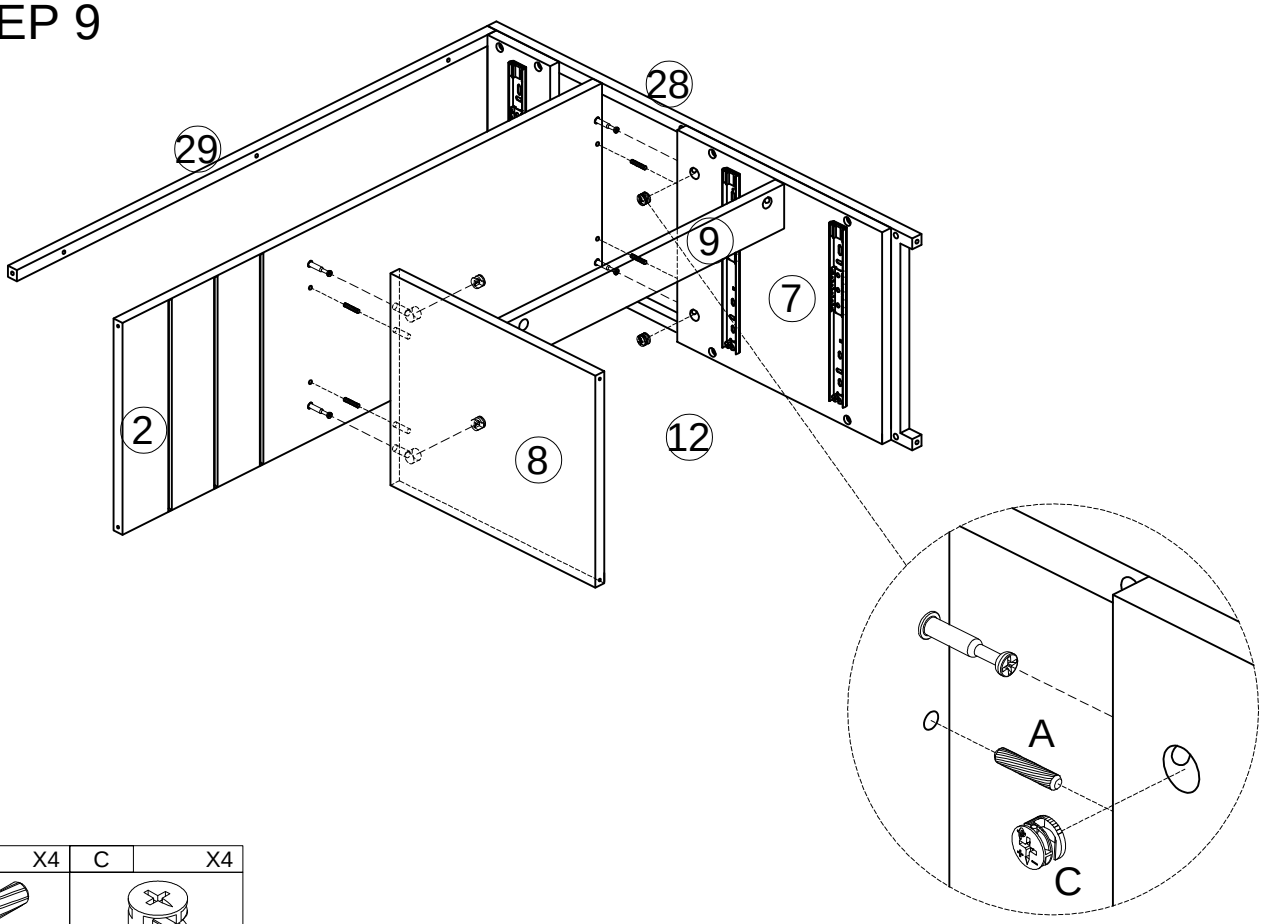

A	X4	C	X4


STEP 10

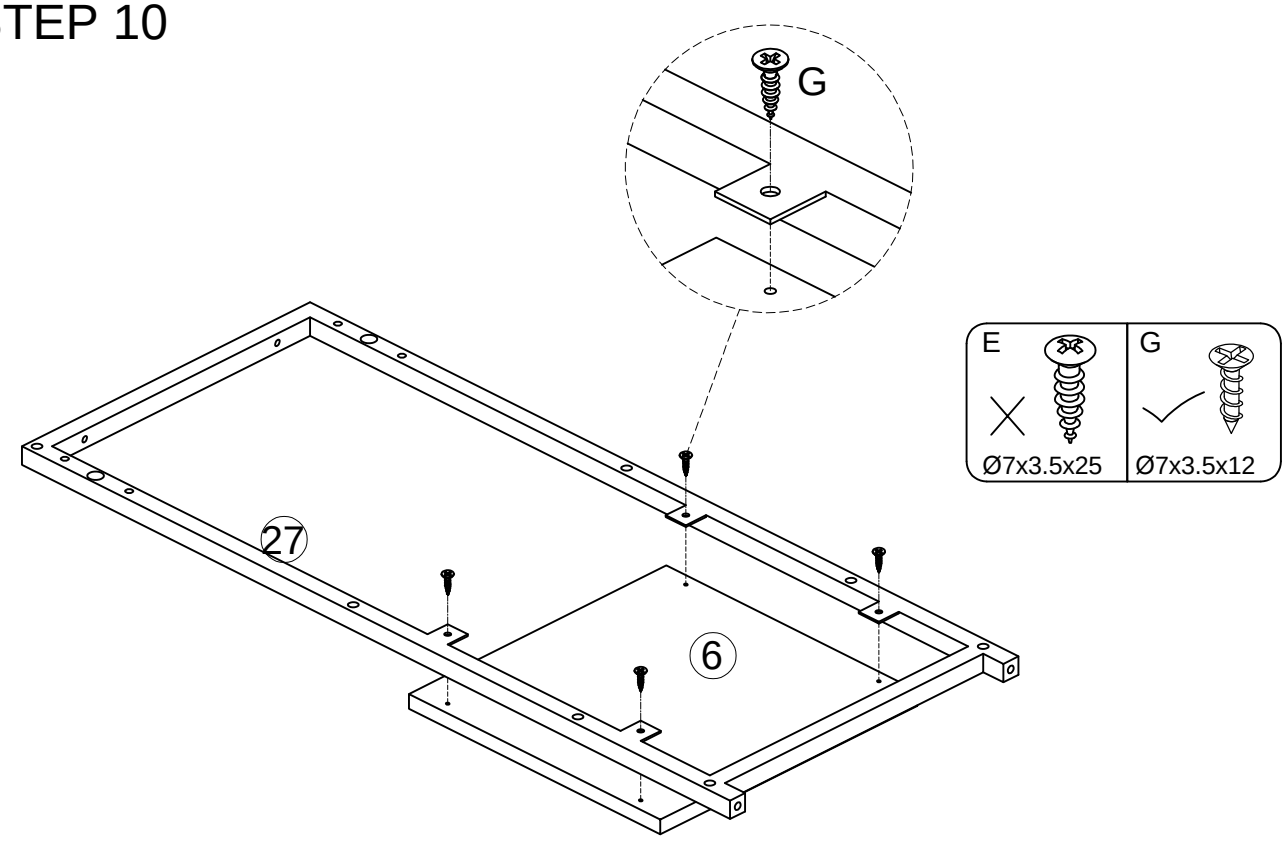


G	X4

STEP 11


After locking all 4 screws J
into the holes, tighten them

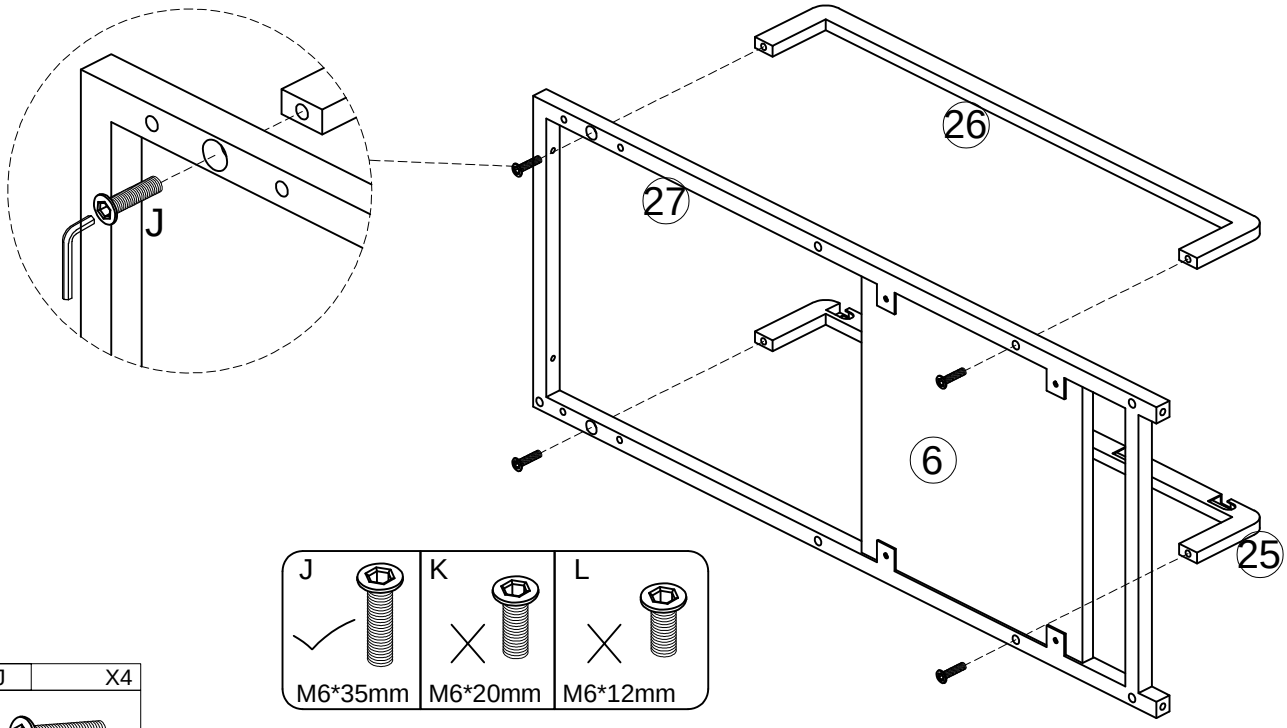


J	X4



STEP 12

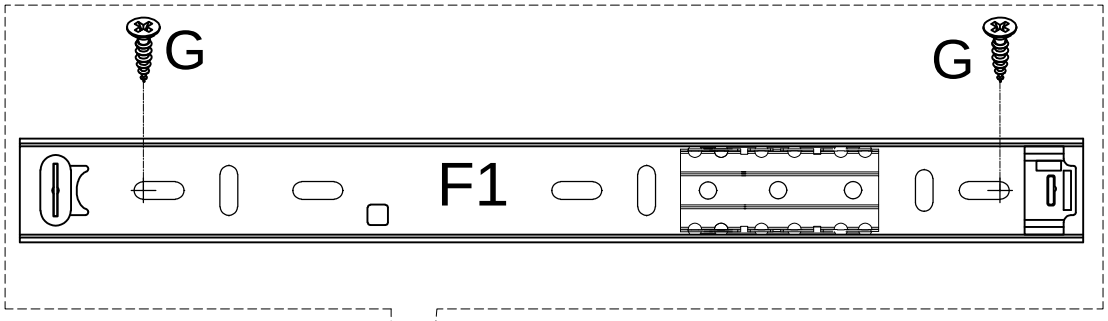

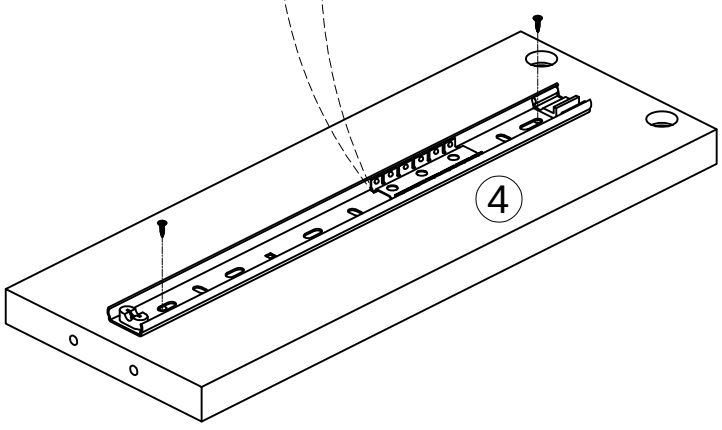


F1	X1	G	X2






STEP 13

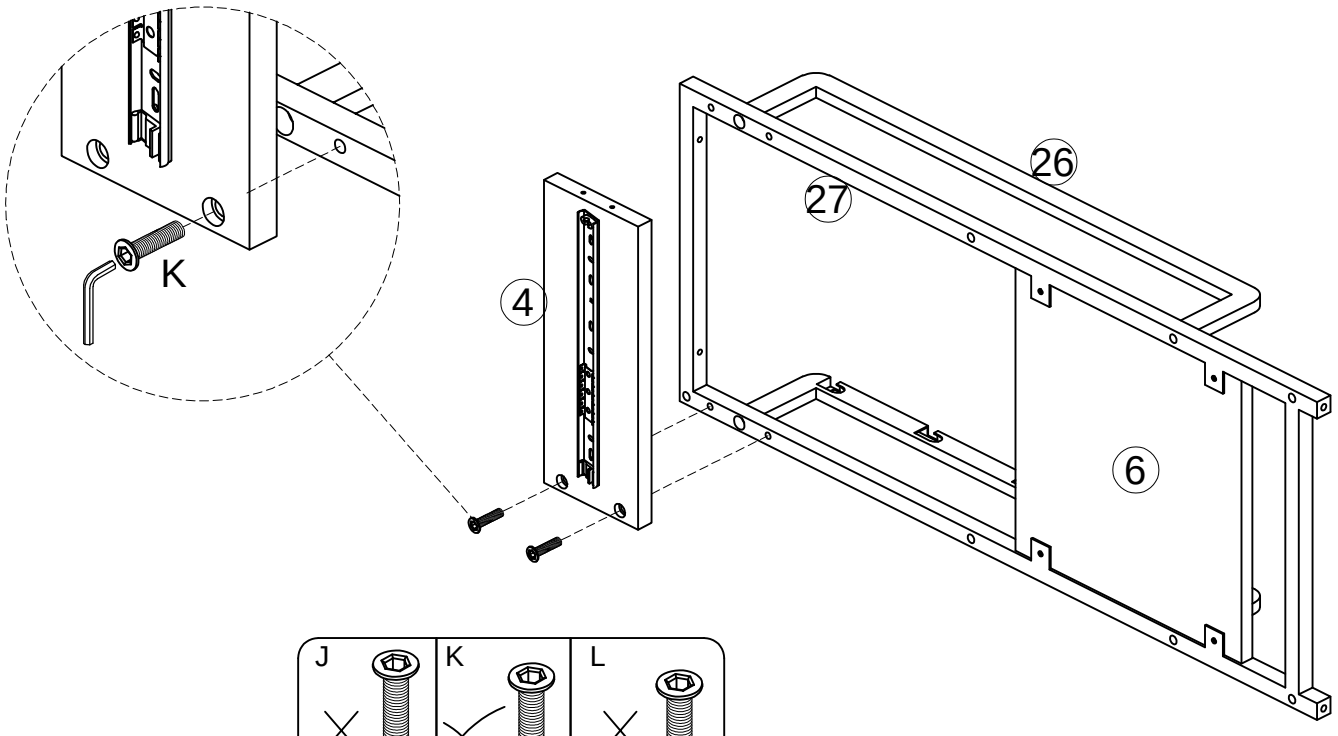

J	K	L
M6*35mm	M6*20mm	M6*12mm

K	X2


STEP 14

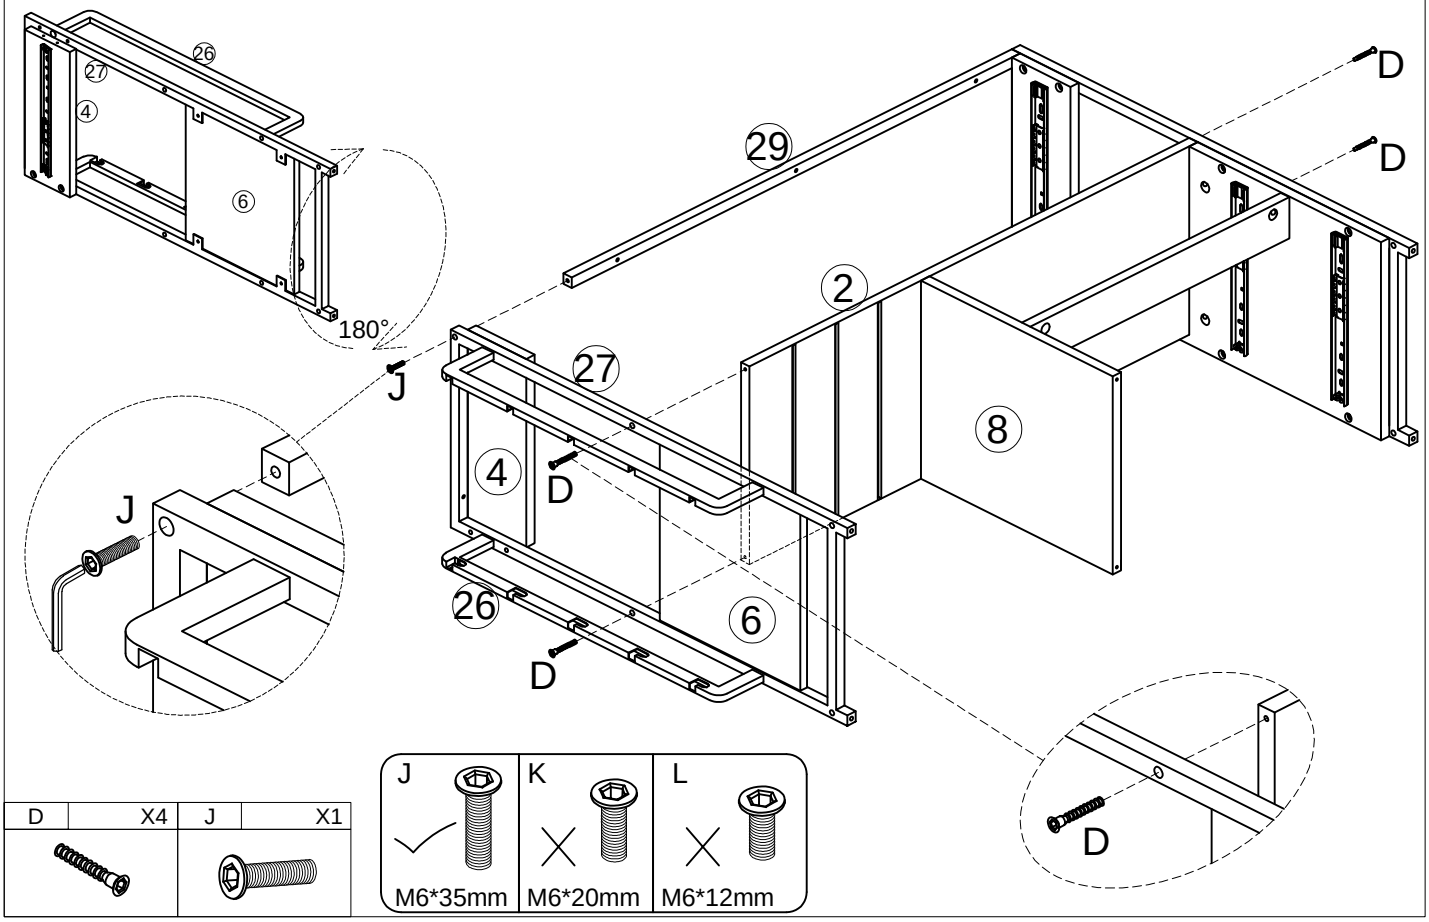


J	K	L
M6*35mm	M6*20mm	M6*12mm

D	X4	J	X1

STEP 15

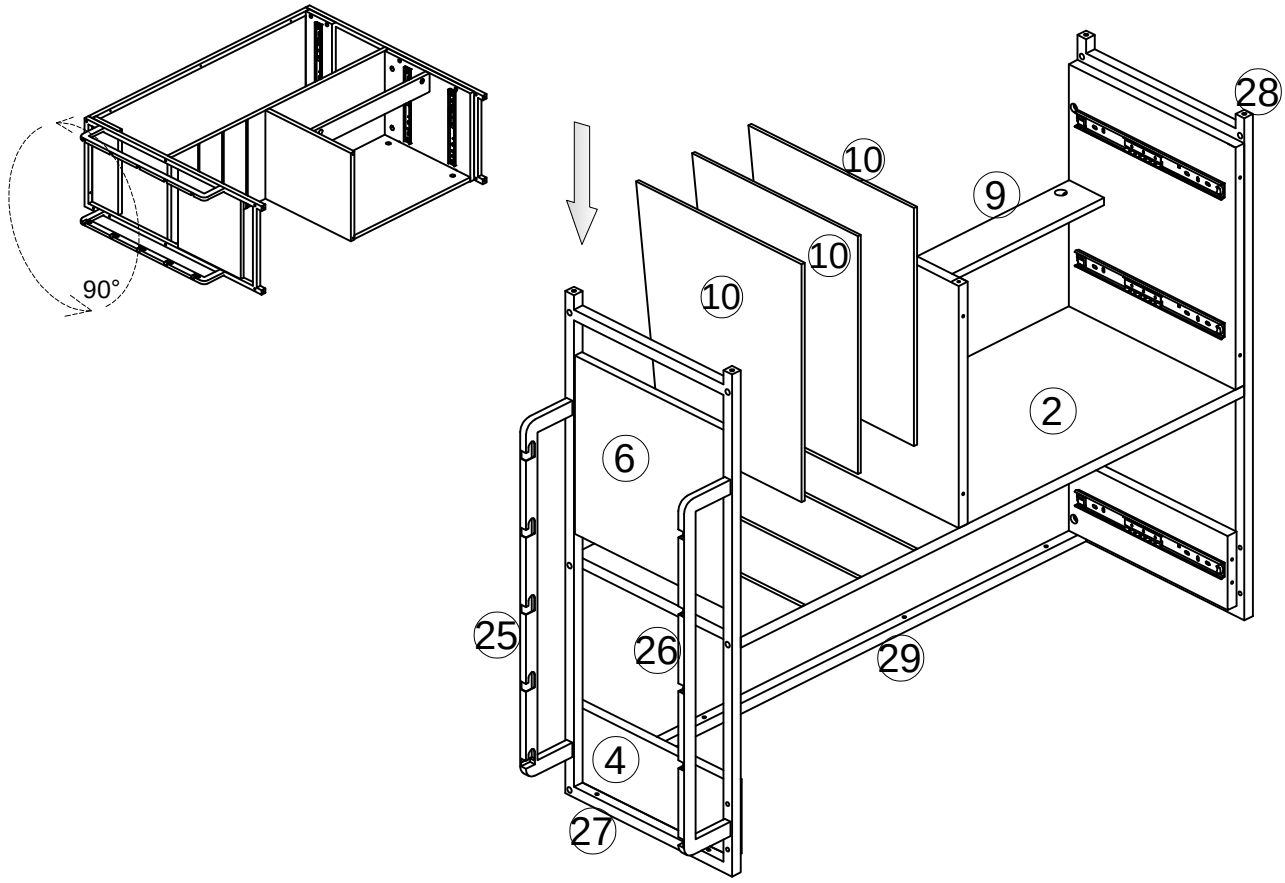

STEP 16

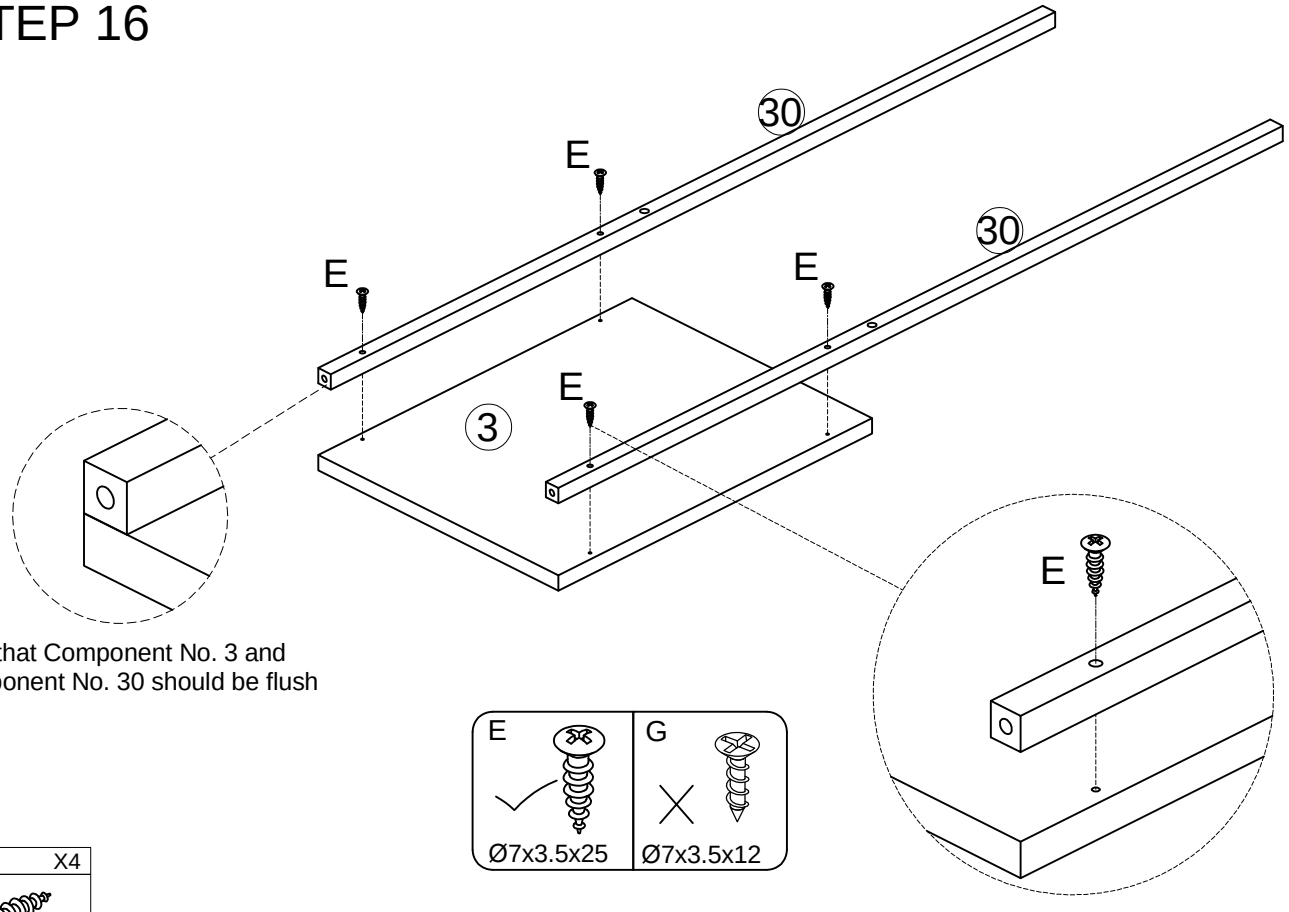


Note that Component No. 3 and Component No. 30 should be flush

E	X4



STEP 17


Note that part 10 should be placed in the slots of parts #2 & #3

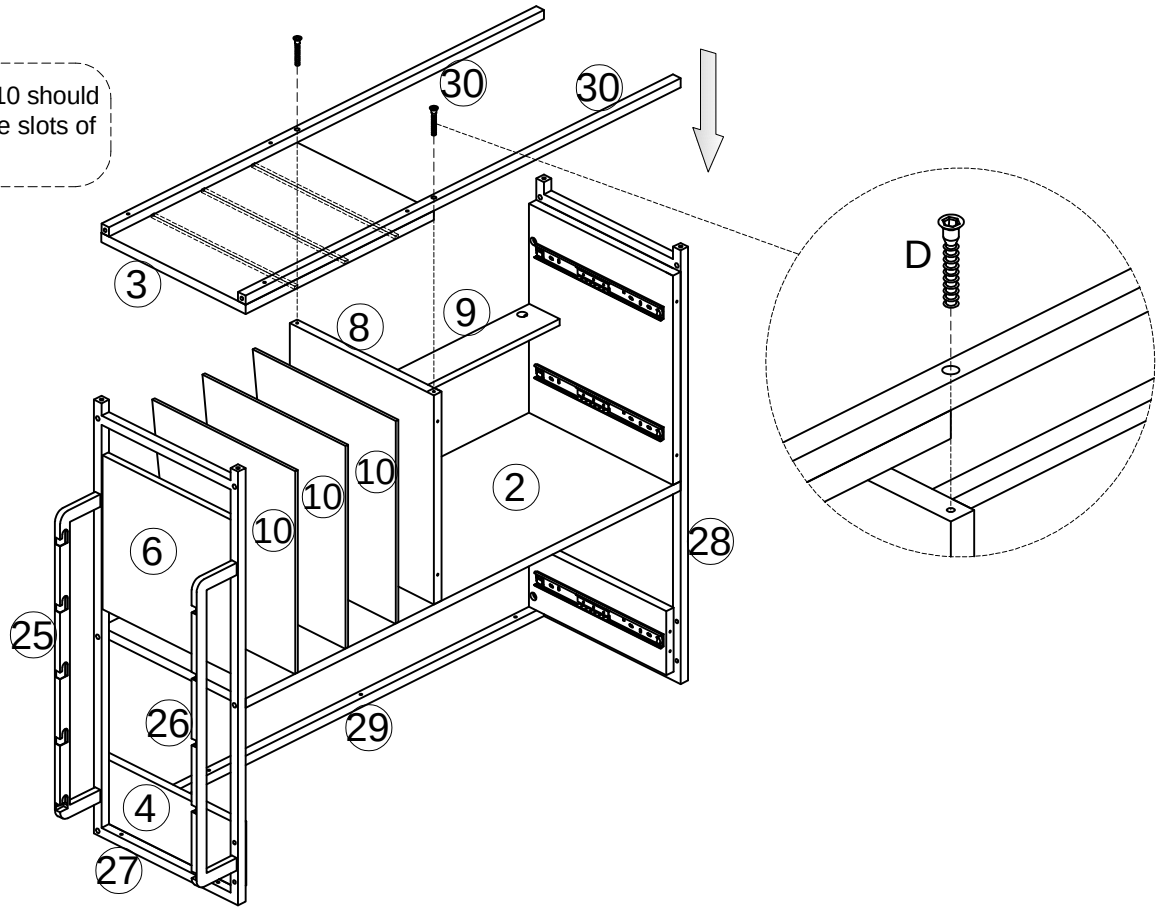

D	X2




STEP 18

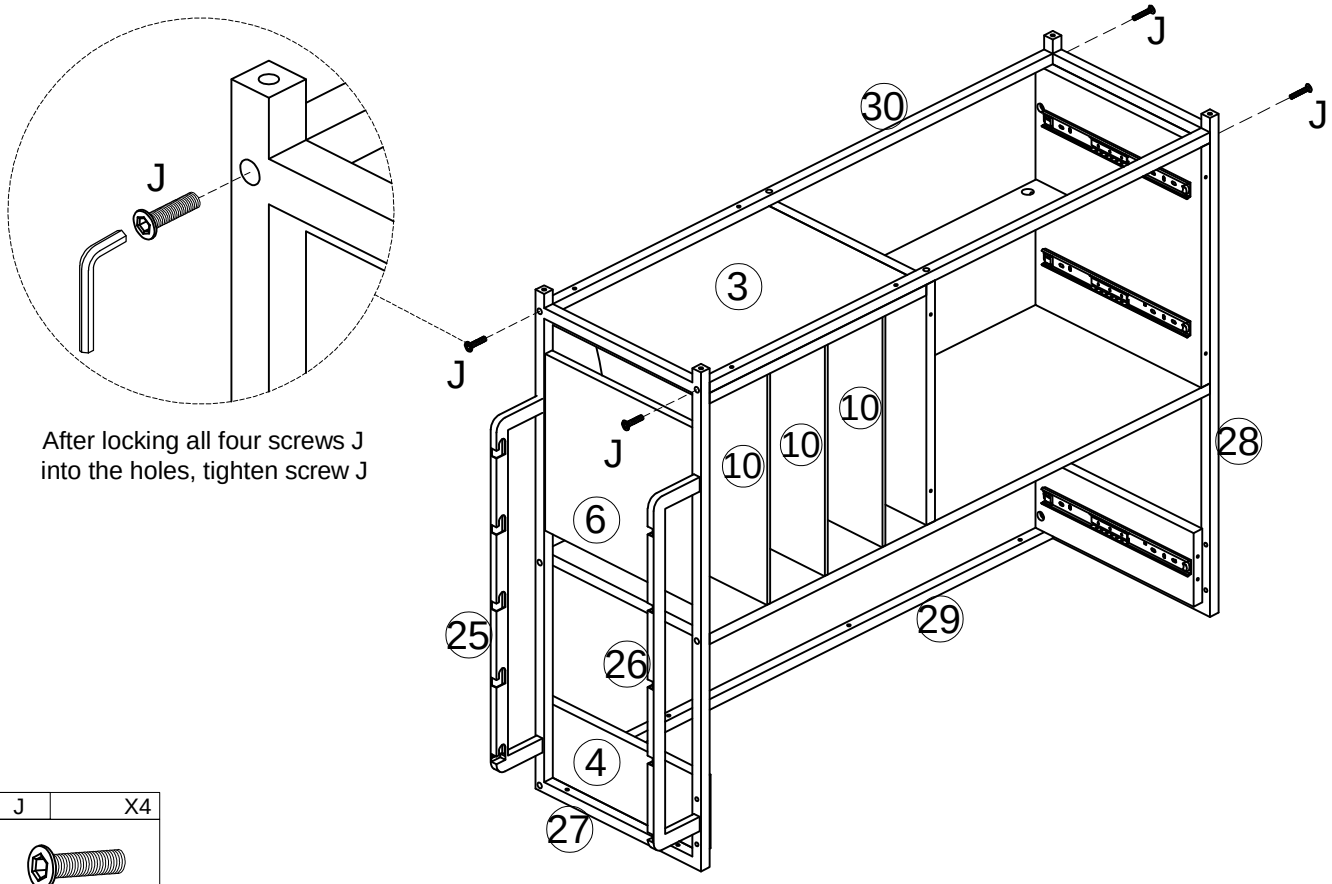

After locking all four screws J into the holes, tighten screw J


J	X4

STEP 19

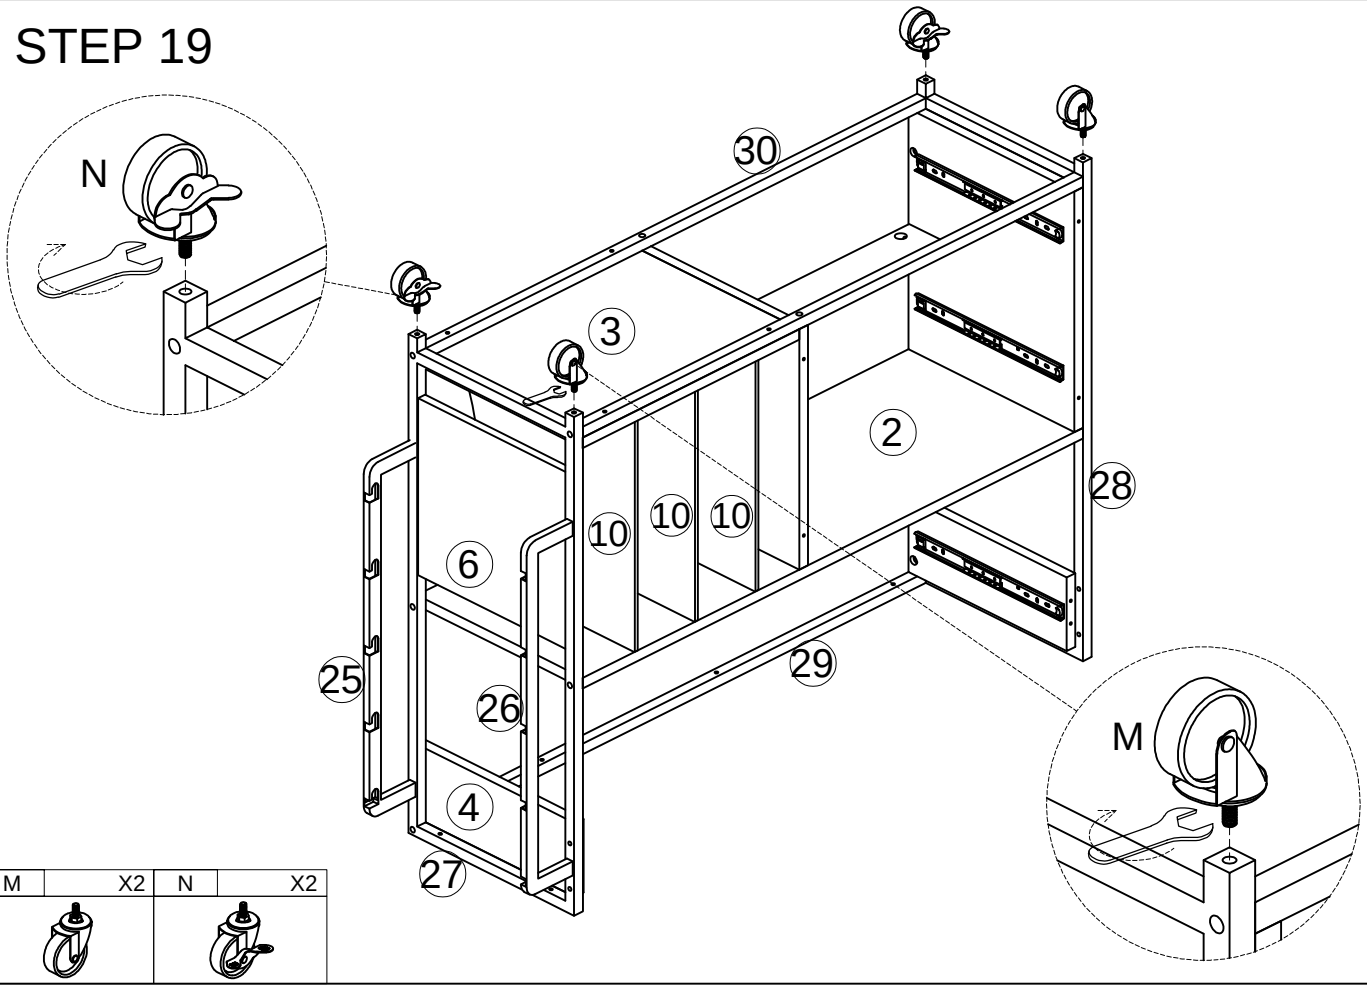


M	X2	N	X2

STEP 20

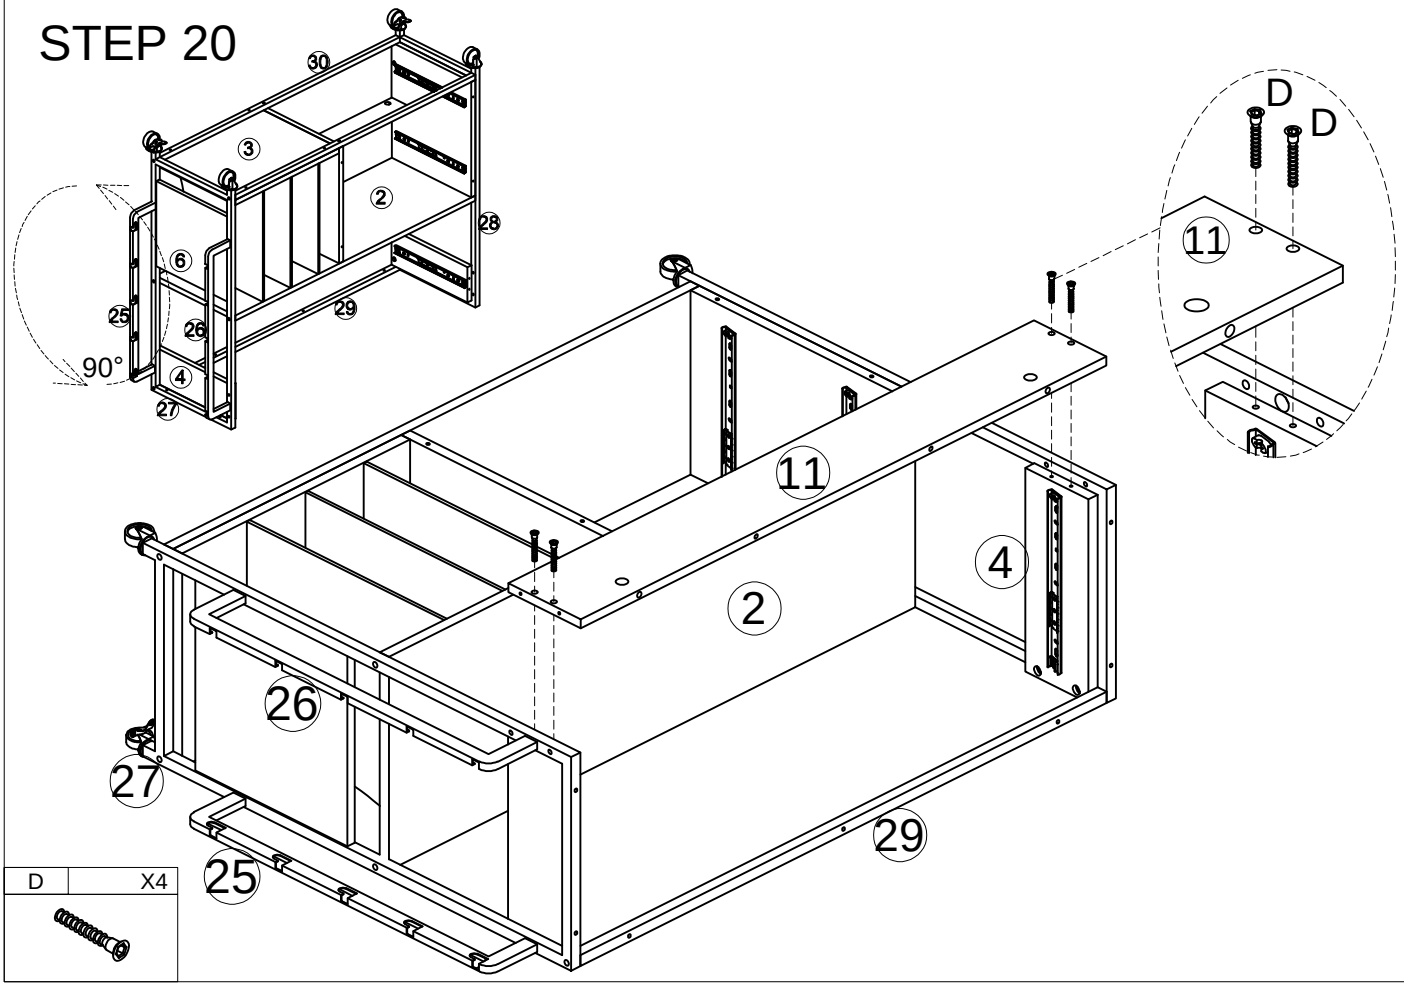


D	X4

STEP 21

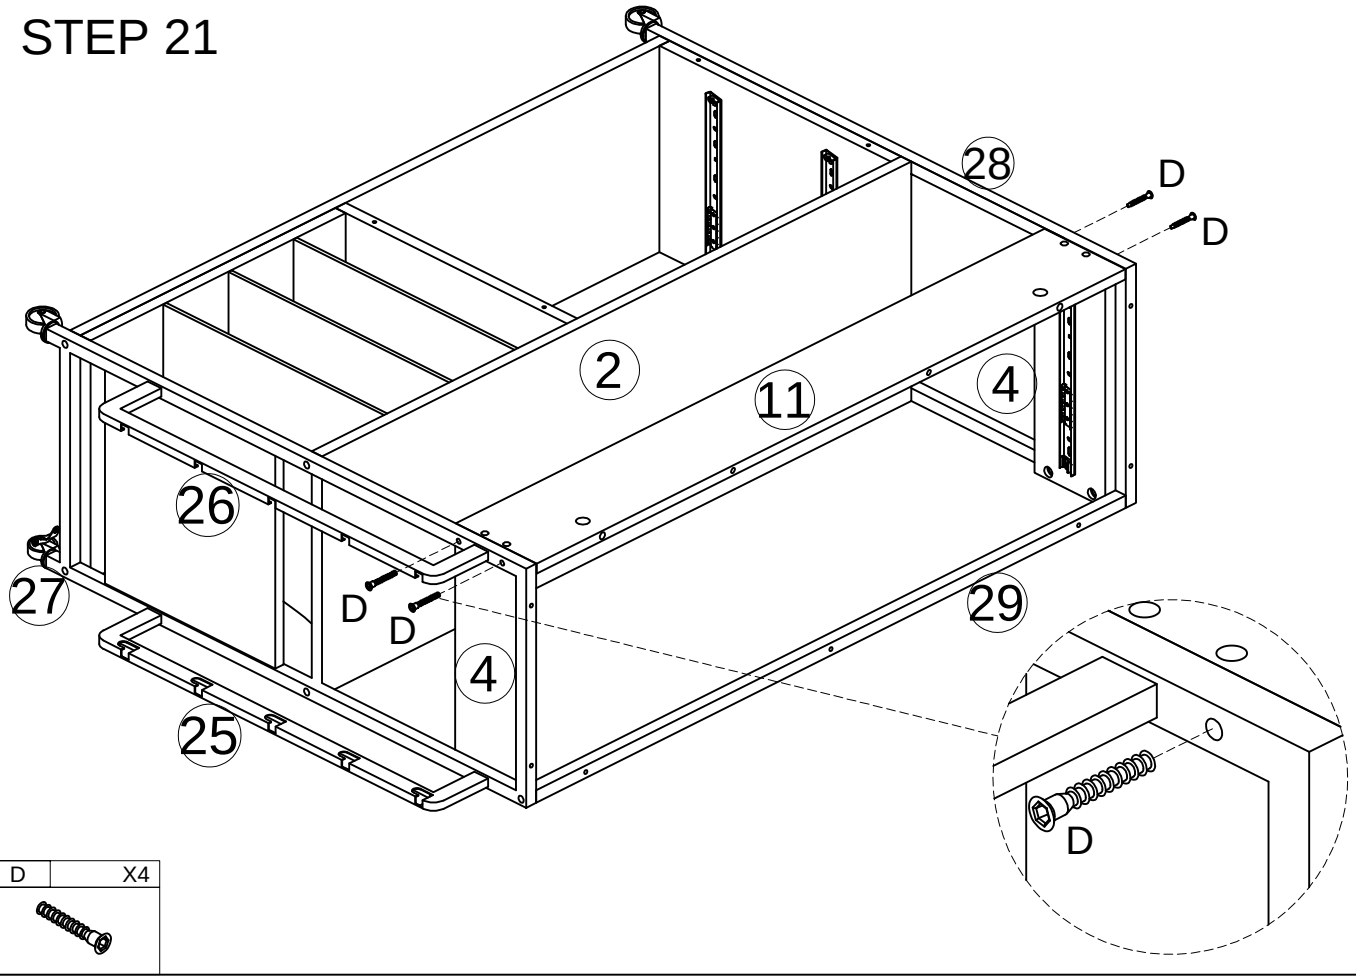


D	X4

STEP 22

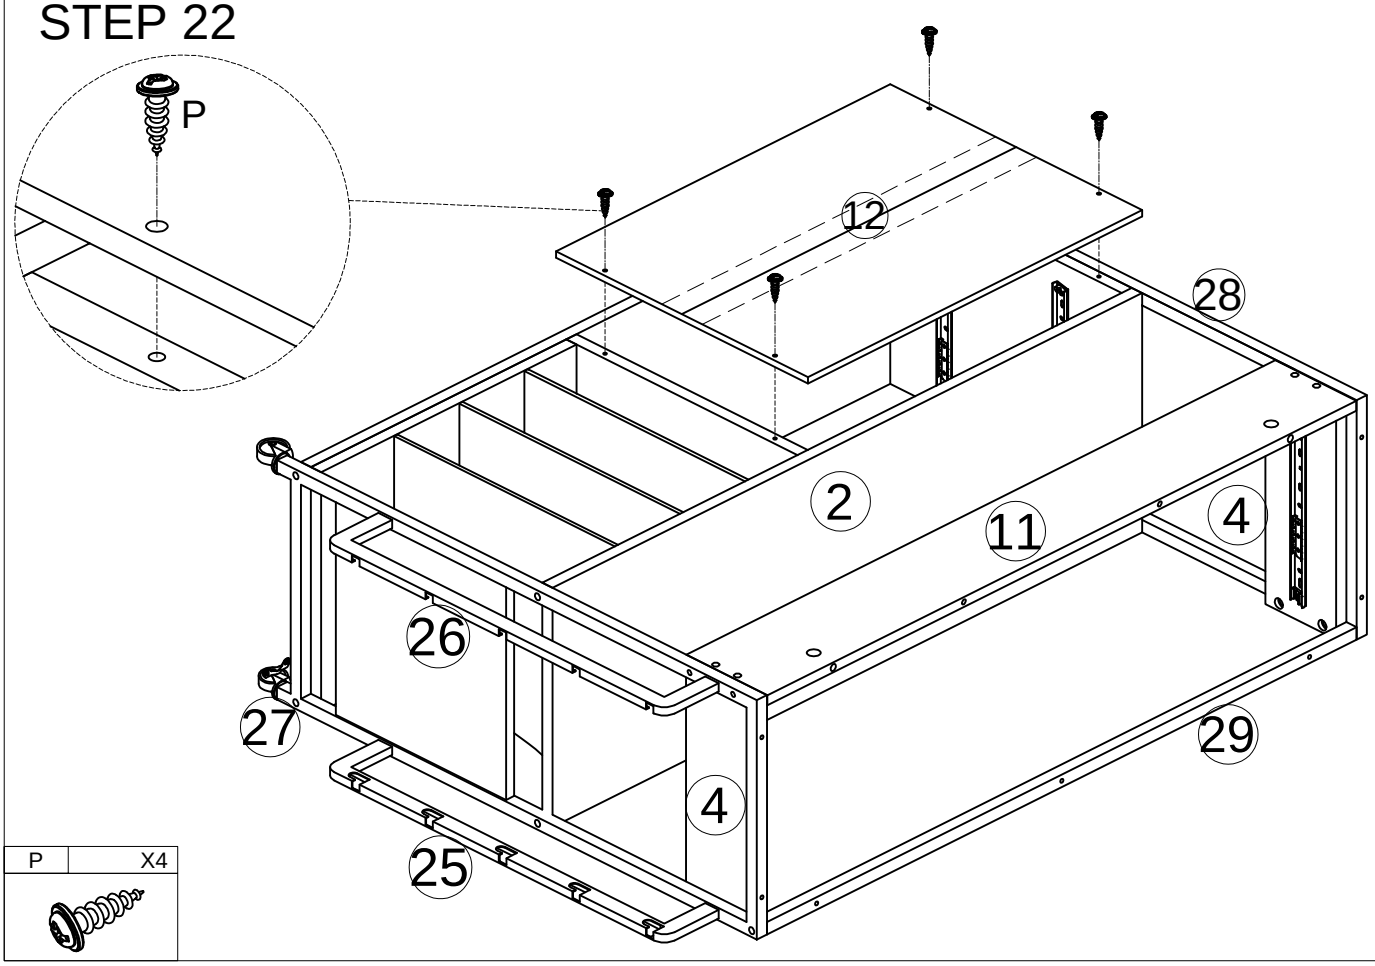


P	X4

STEP 23

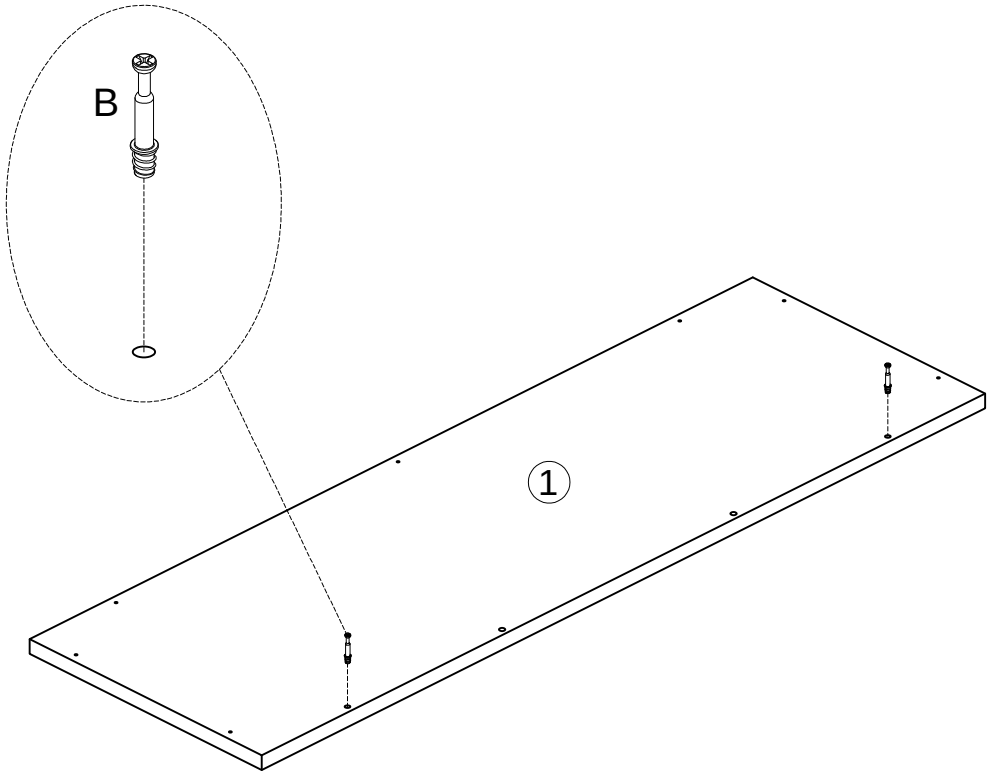


B	X2




STEP 24


E	G
Ø7x3.5x25	Ø7x3.5x12

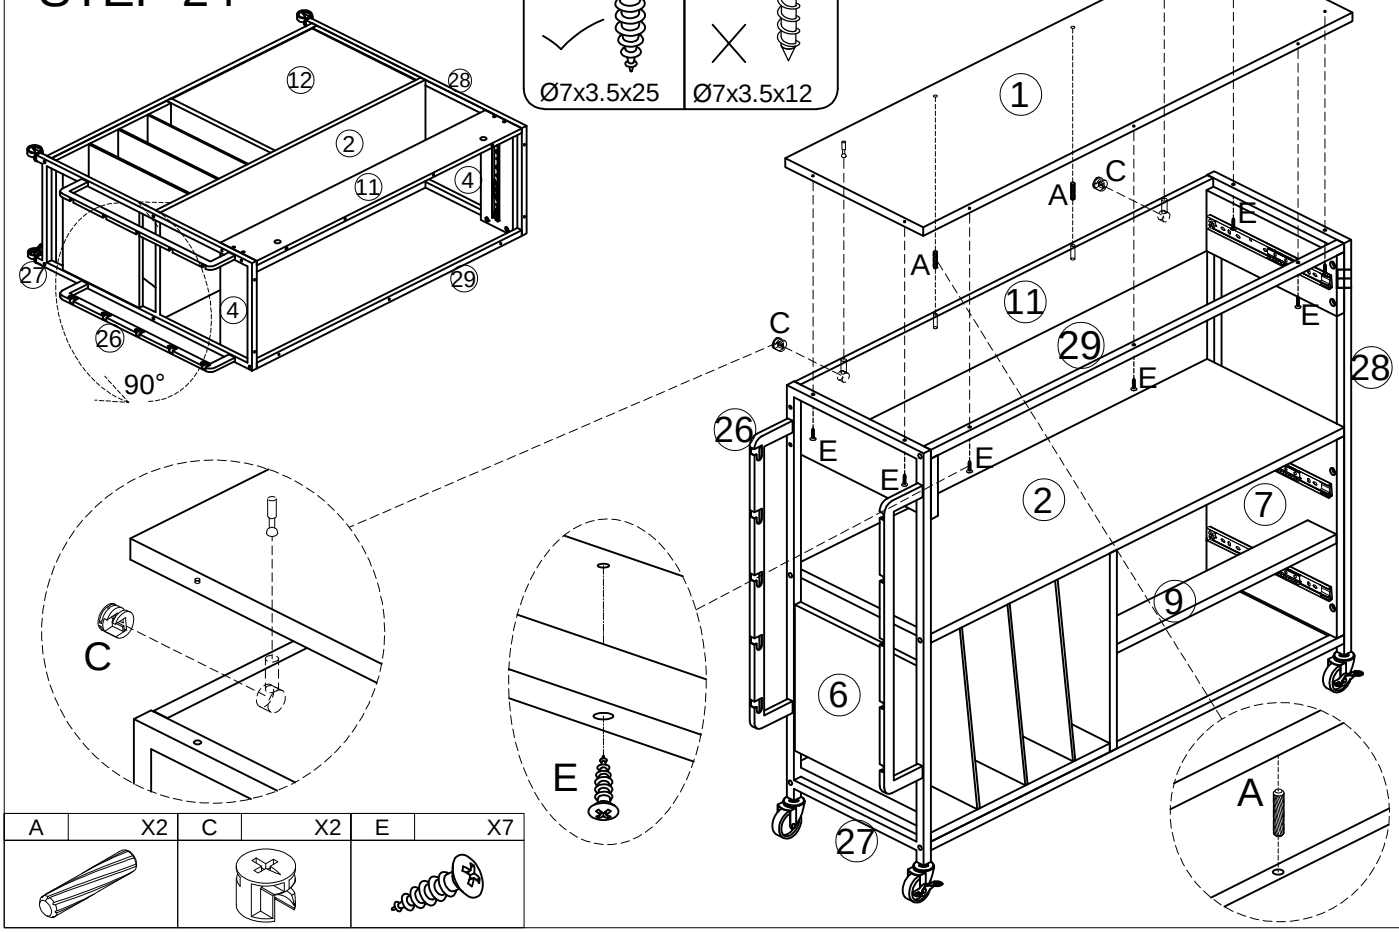

A	X2	C	X2	E	X7

STEP 25

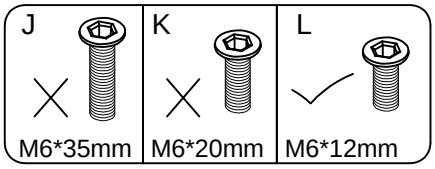


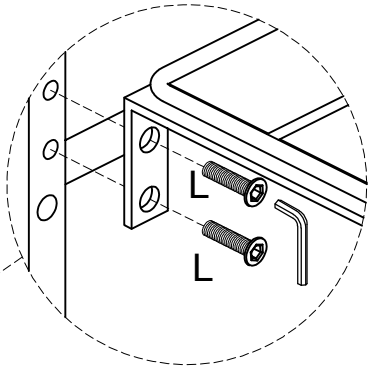

After locking all 10 screws L into the holes, tighten them

L	X10


STEP 26

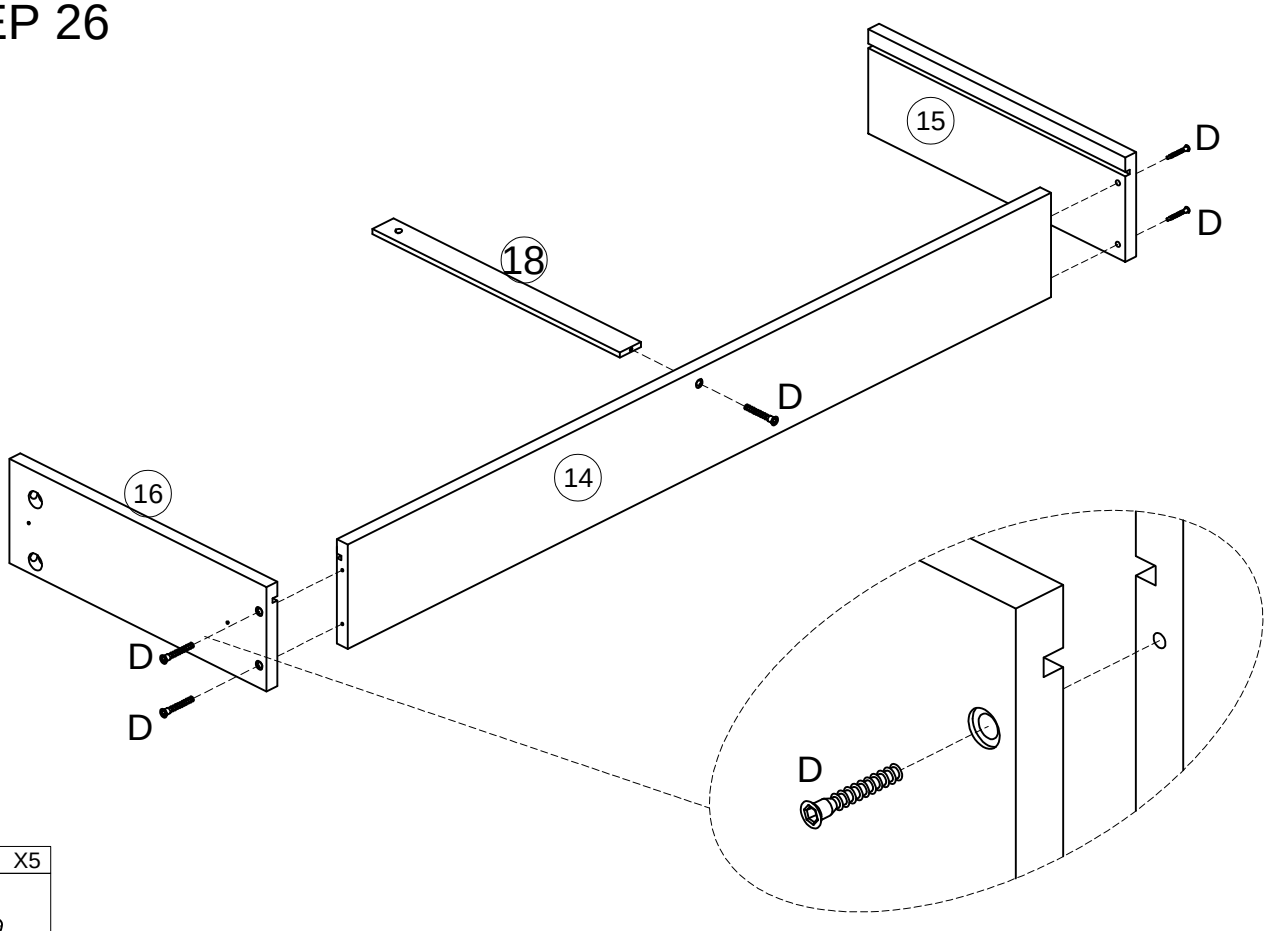


D	X5




STEP 27

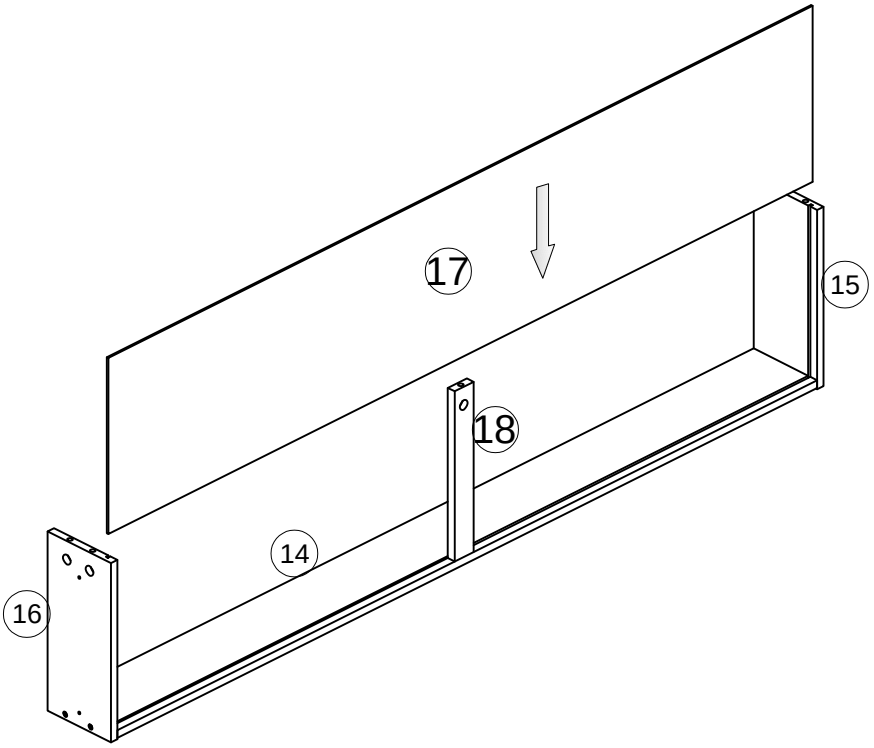


STEP 28

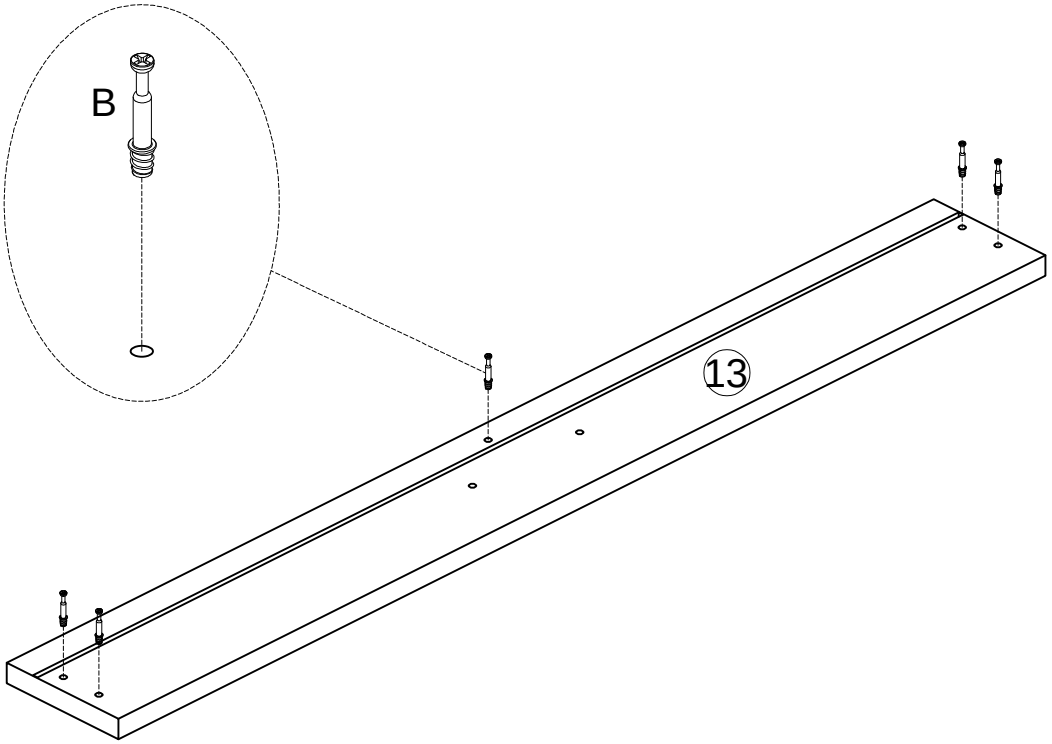

B	X5




STEP 29

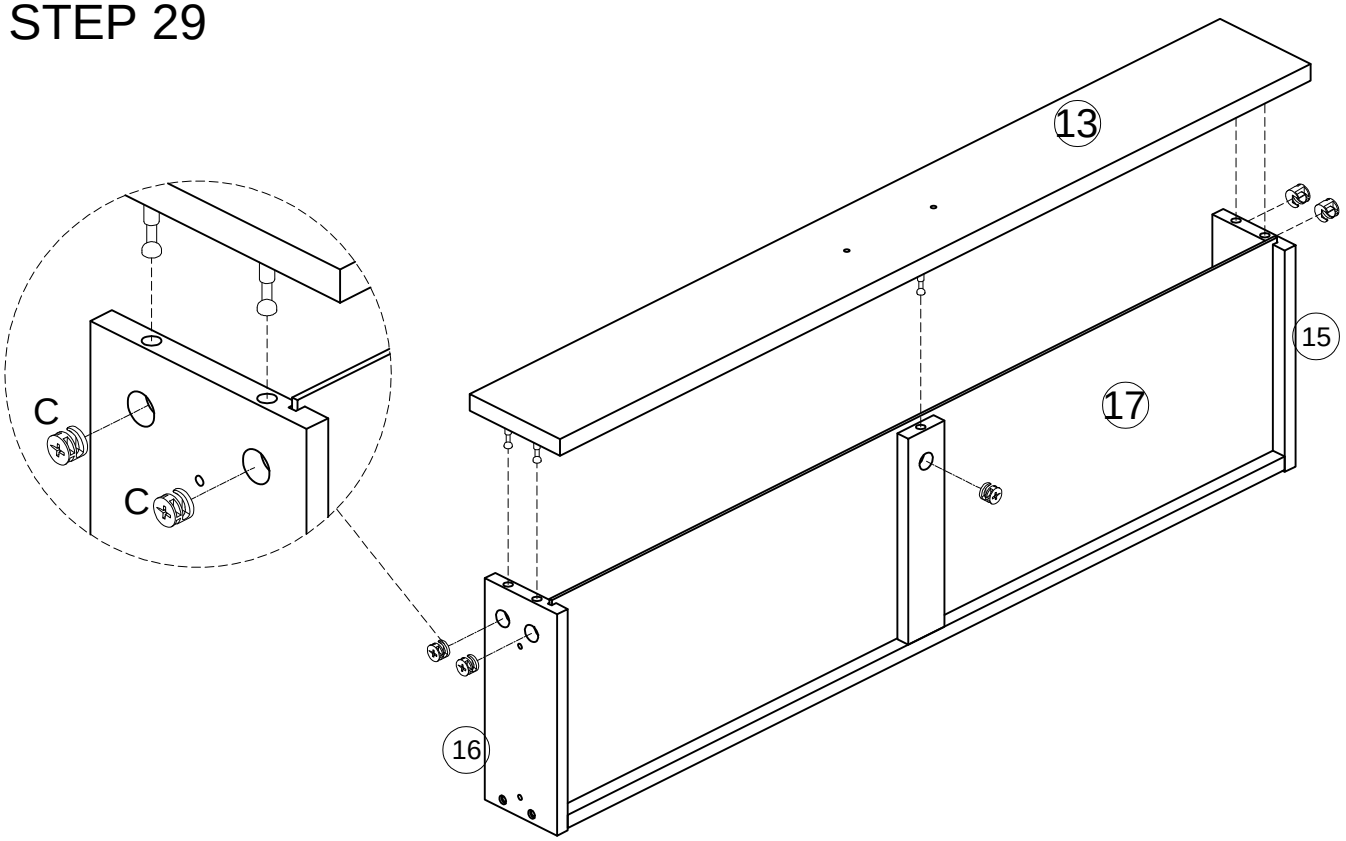


C	X5



STEP 30

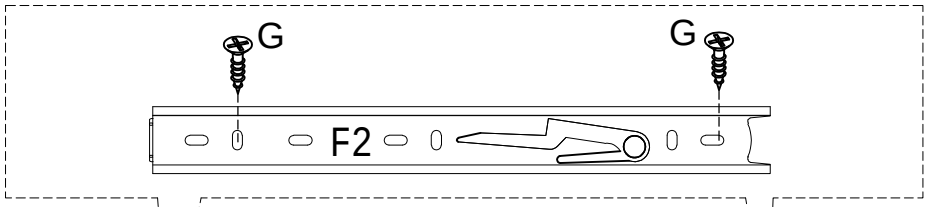

E	G
Ø7x3.5x25	Ø7x3.5x12

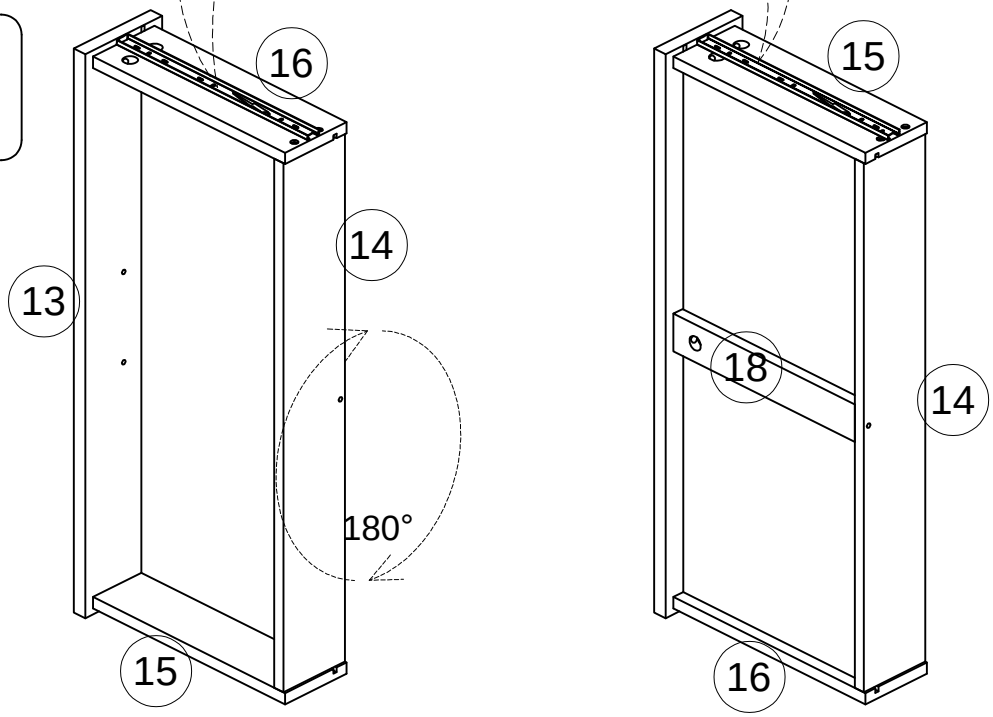


G	X4



F2	X2




STEP 31

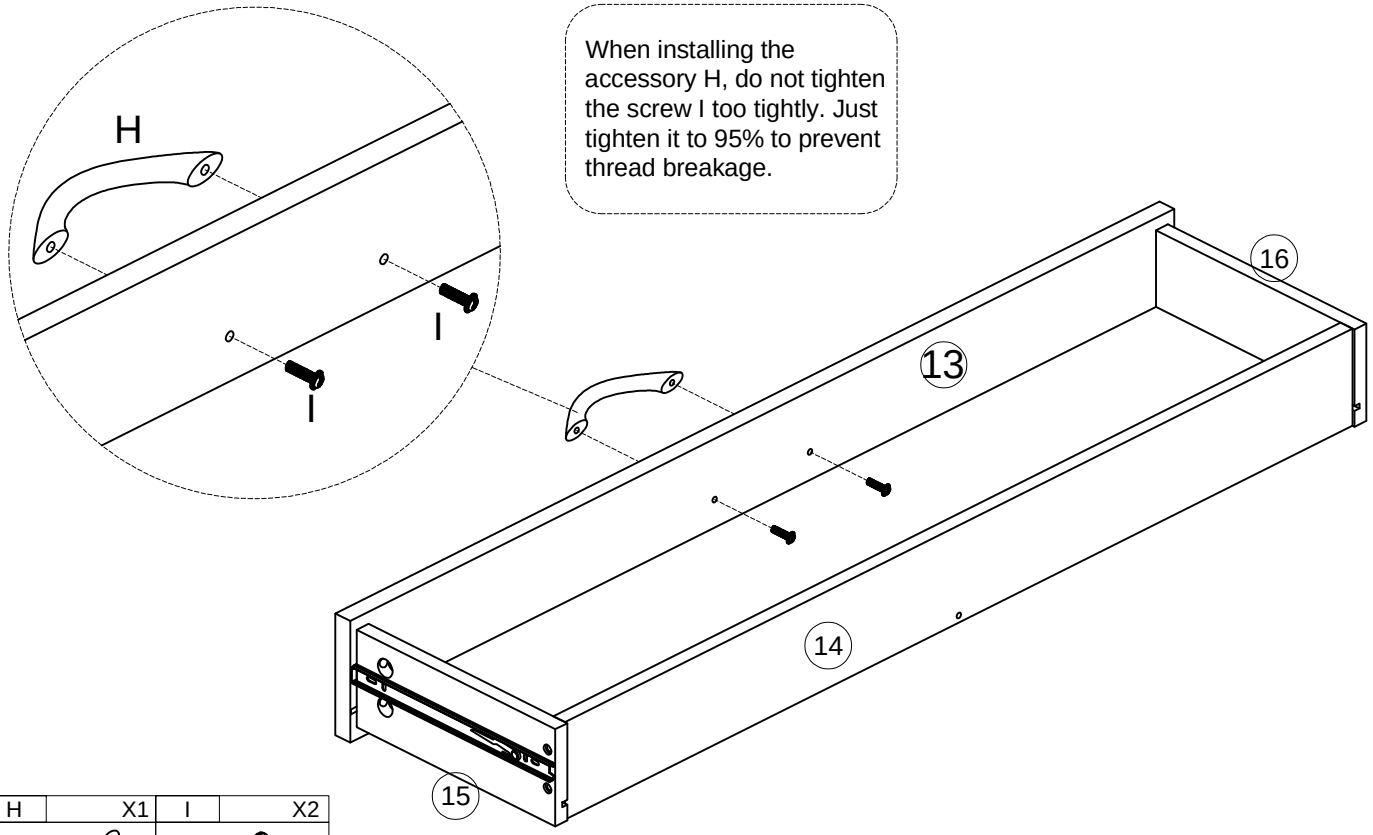


H	X1	I	X2

STEP 32

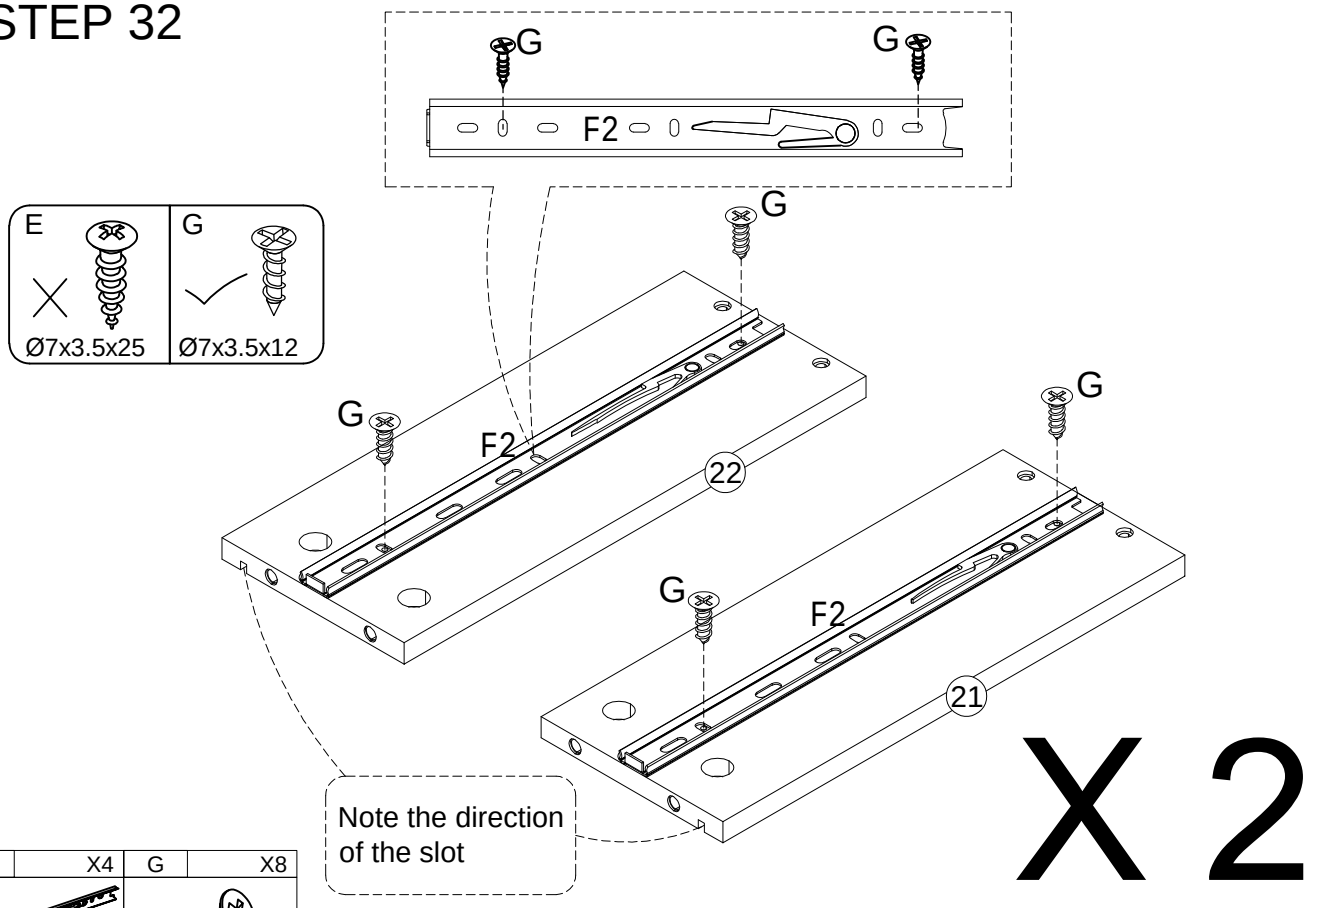

F2	X4	G	X8

STEP 33

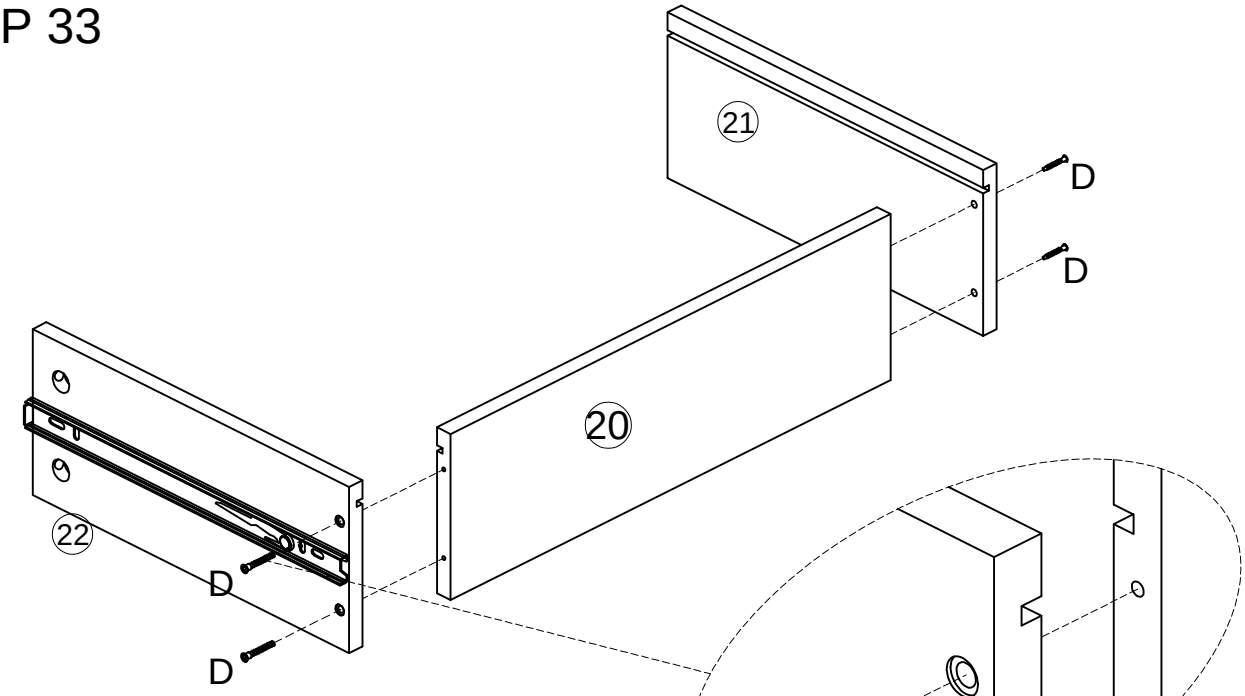


X2

D	X8




STEP 34

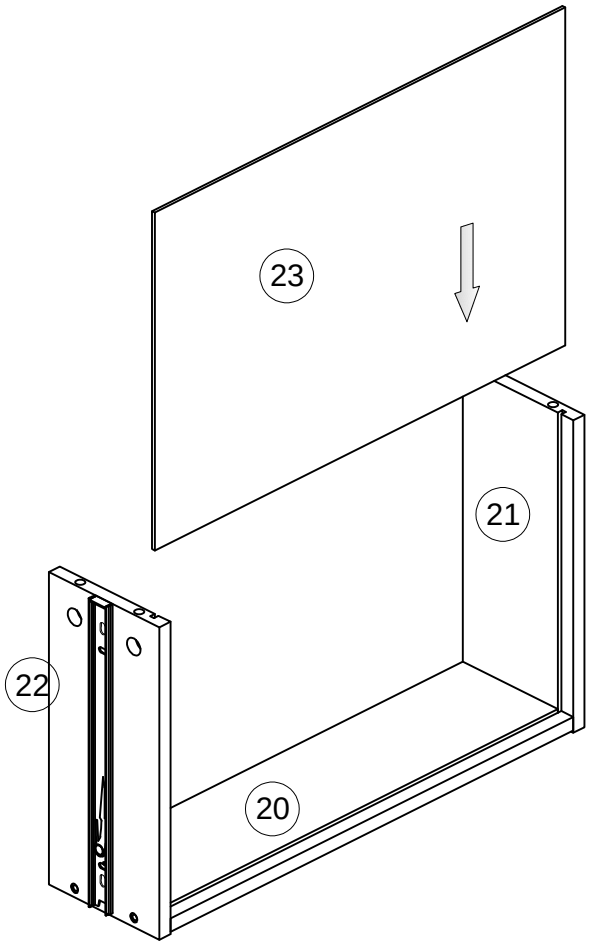


X2

STEP 35

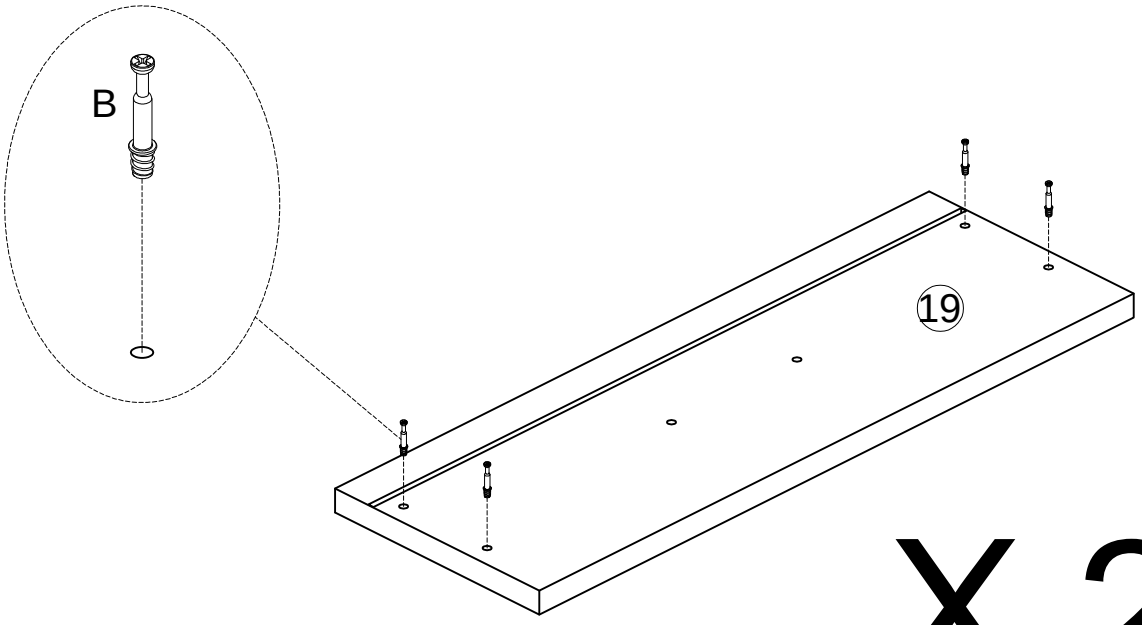


X 2

B	X8



STEP 36

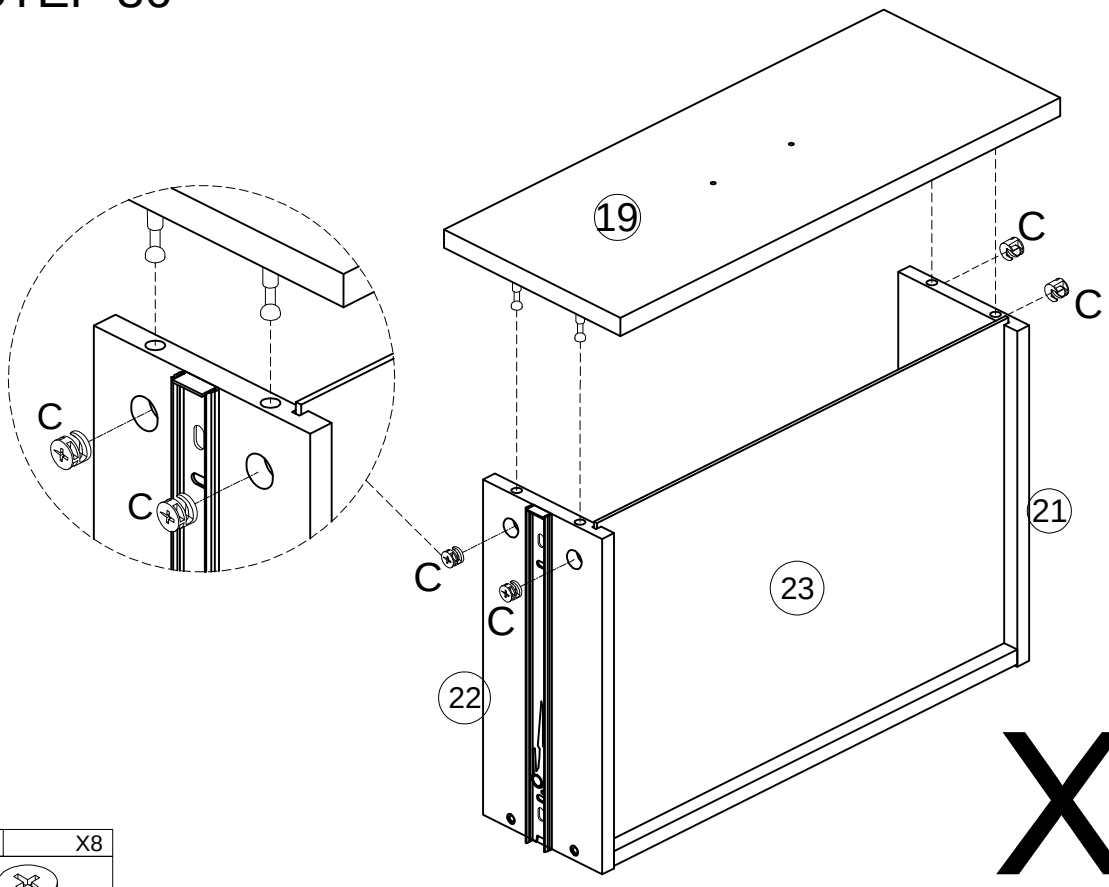


X 2


C	X8



STEP 37

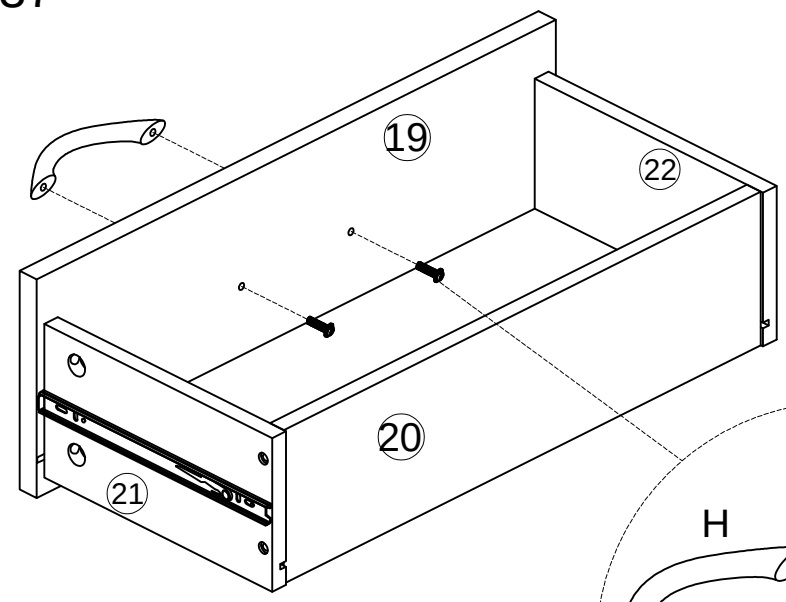


When installing the accessory H, do not tighten the screw I too tightly. Just tighten it to 95% to prevent thread breakage.

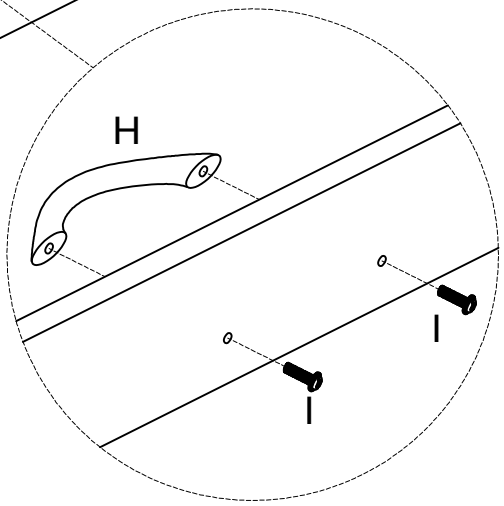



X 2

H	X2	I	X4
			

STEP 38


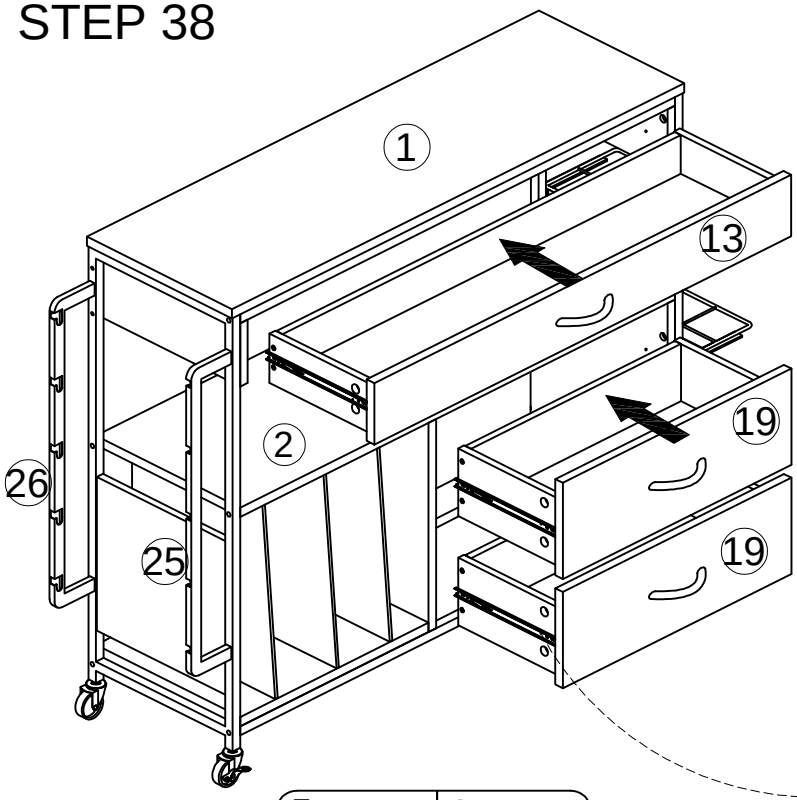


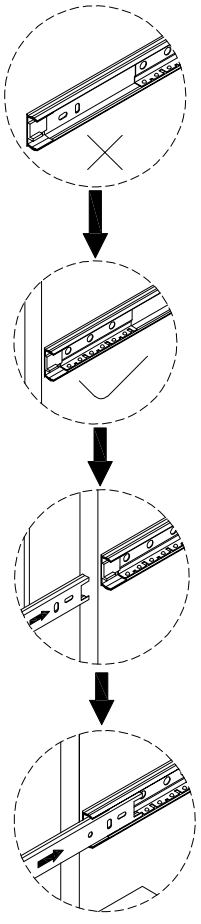




This screw can be loosened to adjust the top and bottom gaps of the drawer

Lock screw (G) after adjusting the upper and lower gaps


E	G
	
Ø7x3.5x25	Ø7x3.5x12

G	X6
	

STEP 39

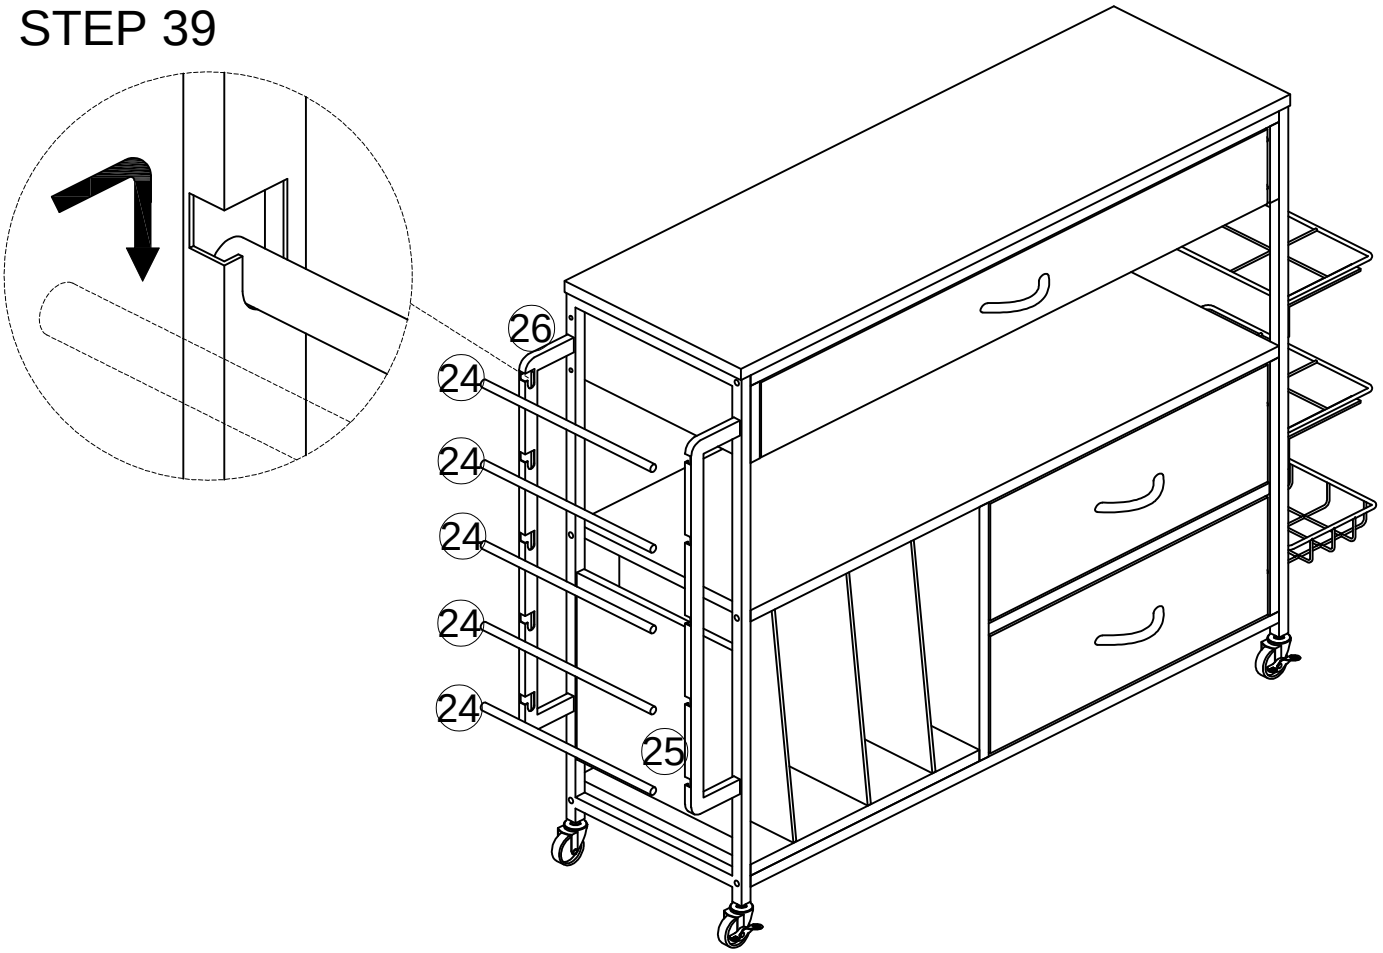

STEP 40

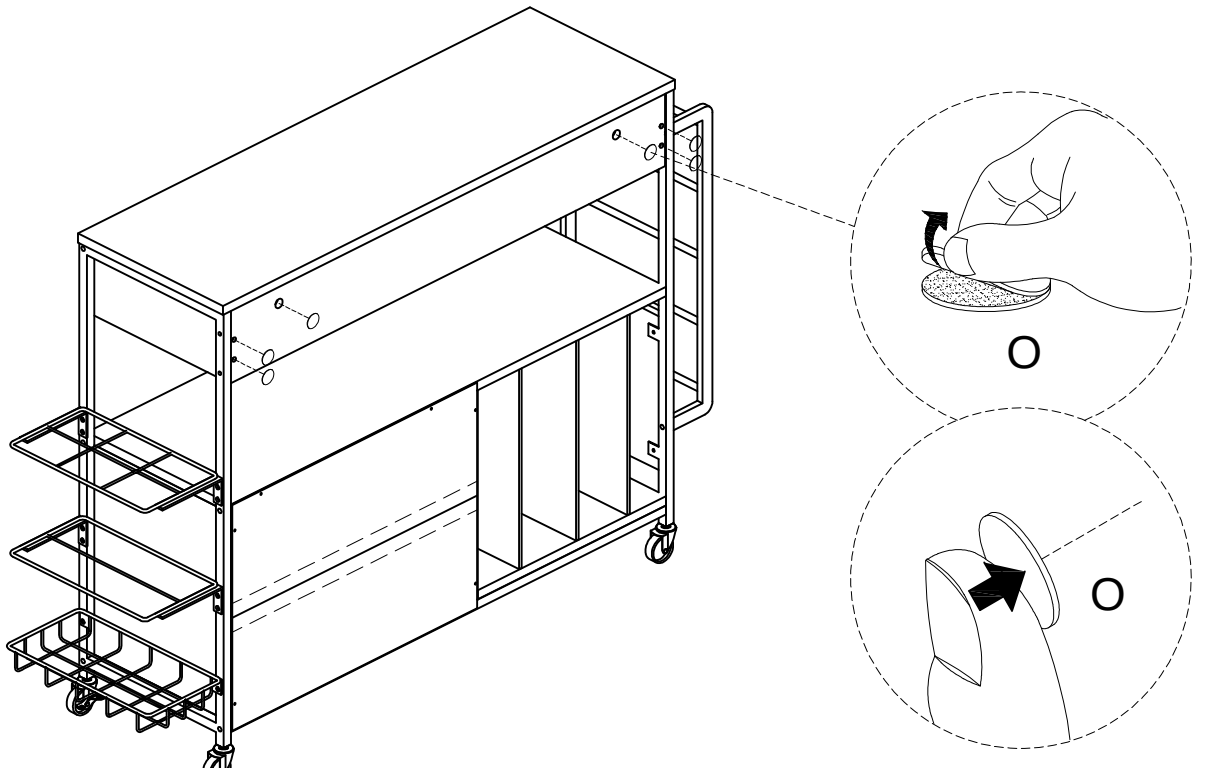

Use stickers to cover the nuts for a better look.

O	X15

