



3LT Vanity Light Fixtures

Product specification

AFTER-SALES SERVICE

Our team is always standing behind for its products. Customers' satisfaction is our pursuit forever.

PLEASE READ THESE INSTRUCTIONS CAREFULLY. FOLLOW ALL INSTALLATION INSTRUCTIONS AND OBSERVE ALL WARNINGS

WARNING








- Turn electricity off at main circuit breaker panel before beginning installation. Thoroughly wash hands after installing.
- Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.
- All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.








CAUTION

All glass is fragile, use care when handling glass component(s) and/or lamp(s).

PART LIST AND ASSEMBLY ILLUSTRATION

Note: Some parts may be pre-installed or pre-assembled.


NO	a	b	c	d	e	f	g
COMPONENT							
QUANTITY	4	4	1	3	2	2	1

NO	h	i	j	k	l	m	n
COMPONENT							
QUANTITY	2	1	3	3	4	1	2

INSTALLATION STEPS


STEP 1

Attach the mounting units to the base of the FIXTURE BACK PLATE, in the order shown in the picture below (i-h-g-f-m-e).

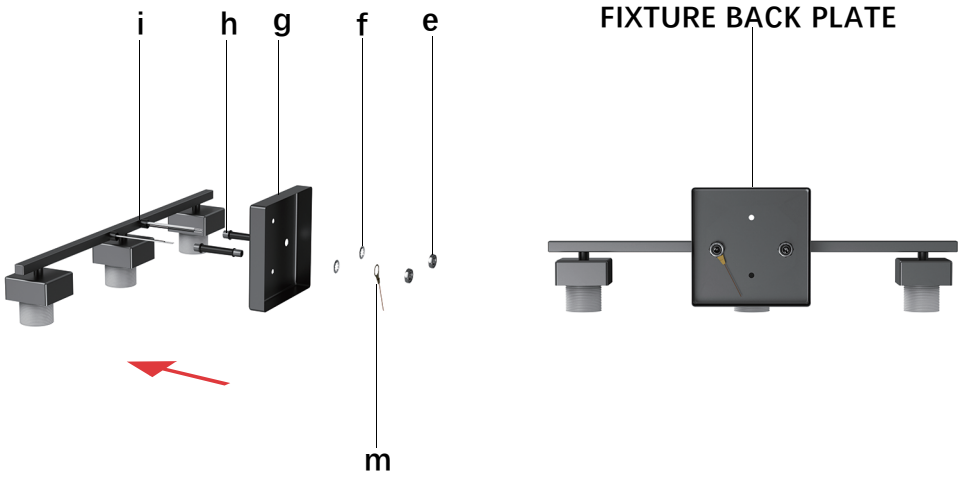

STEP 2


Twist the two screws symmetrically on the MOUNTING BRACKET

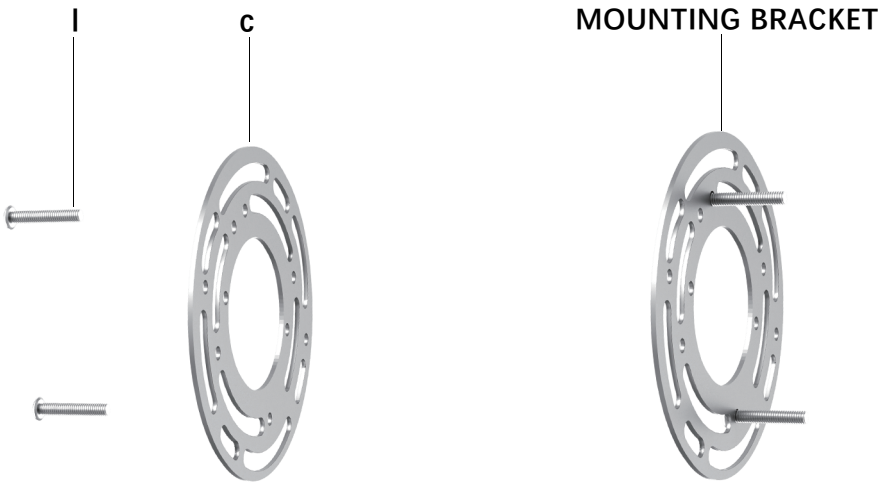

STEP 3

Fix the MOUNTING BRACKET to the JUNCTION BOX by screws. Pay attention to make the position of the two long SCREW (installed in step 2) perpendicular to the horizon, ensure that the lamp can be installed in a horizontal position


JUNCTION BOX

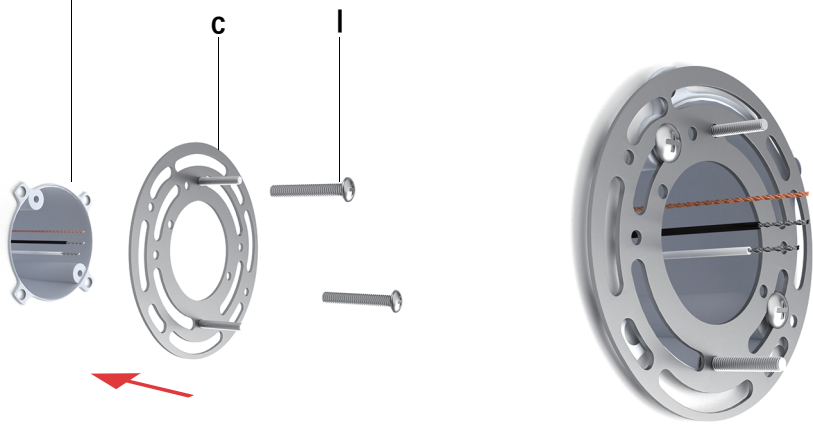

STEP 4


Make wire connections with WIRE NUTS:

- A - Connect the black wire (L) from Fixture to the black supply wire.
- B - Connect the white wire (N) from Fixture to the white supply wire.
- C - Connect the fixture ground wire (E) to the supply ground wire with a WIRE NUT. Carefully tuck wires back into the MOUNTING BRACKET.

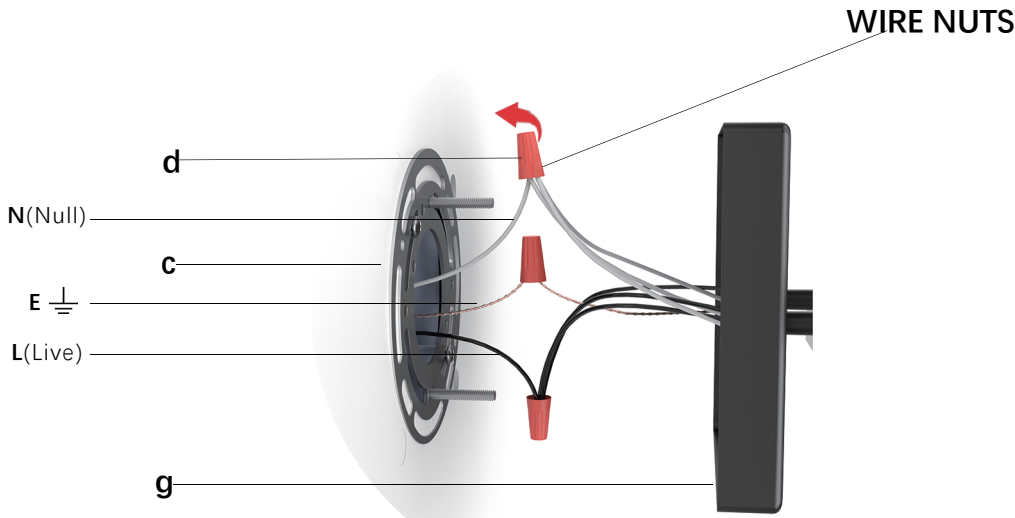


STEP 5

Place the FIXTURE BACK PLATE of the lamp over the MOUNTING BRACKET, use the NUT(n) to attach them.

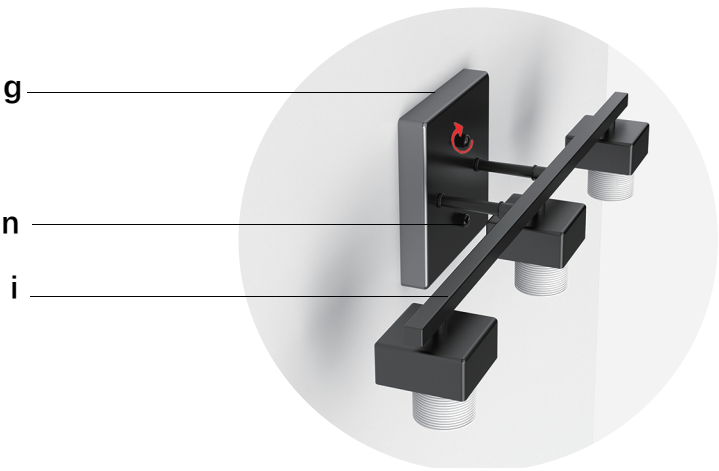

STEP 6

Attach the SHADES onto FIXTURE using SOCKET RINGS. Install the bulbs (Not included).

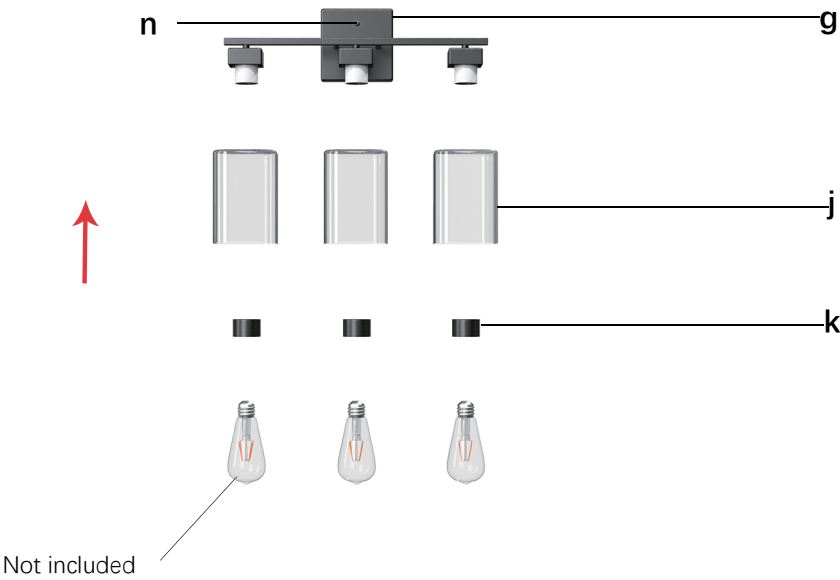

Turn on the light, it's in perfect view!

