


80055 Product Installation Instructions

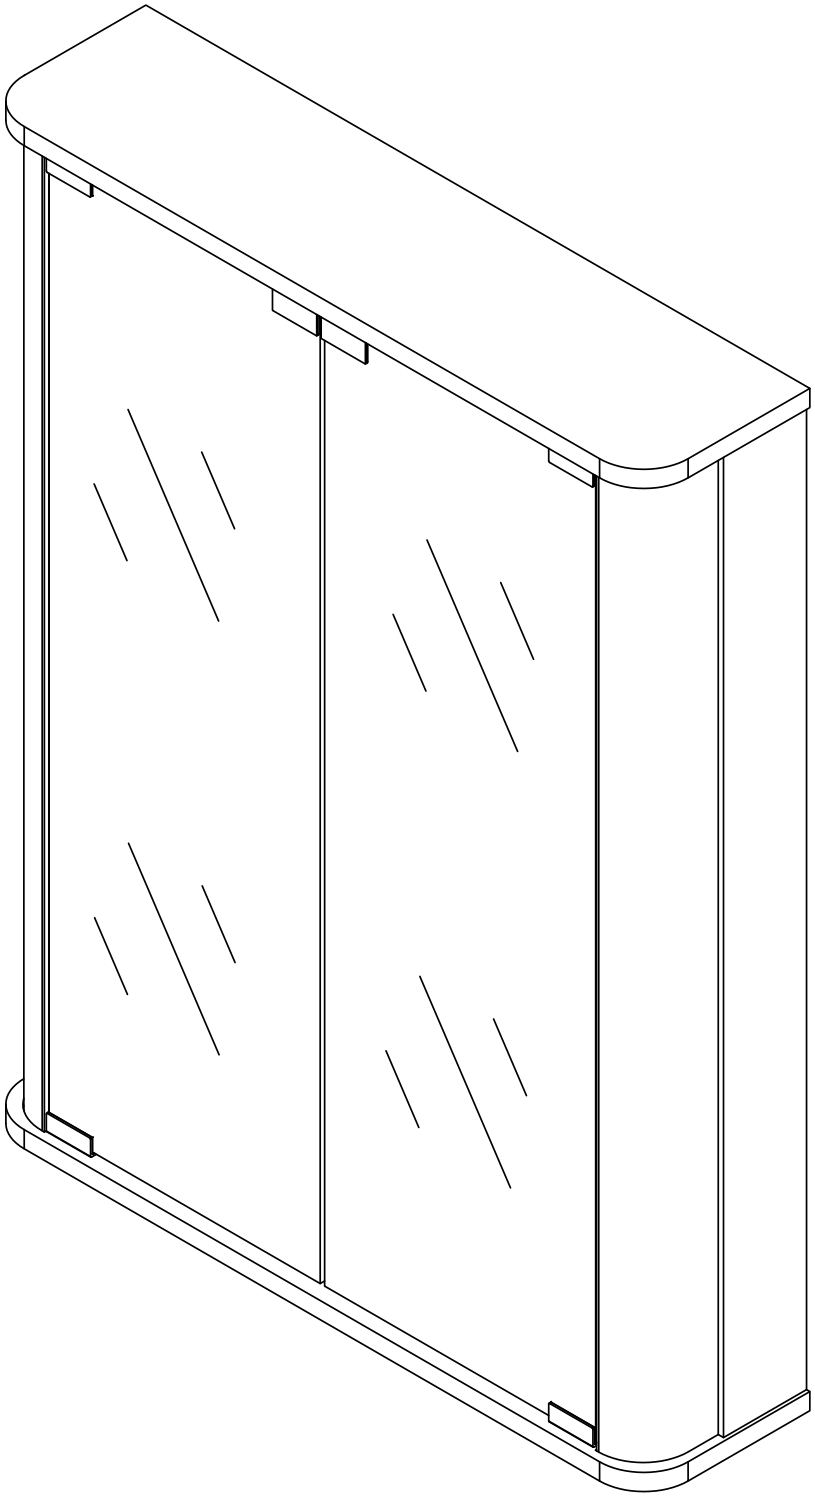

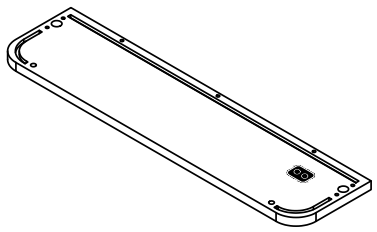


Ax1




Bx1




Cx1

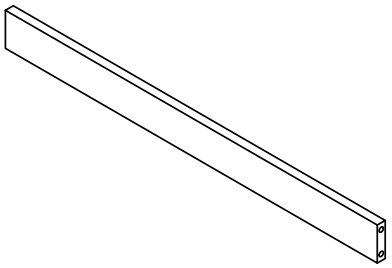


Dx1




Ex1




Fx1

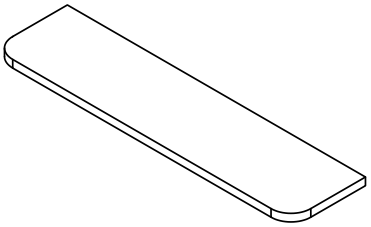


Gx1




Hx2




Ix3

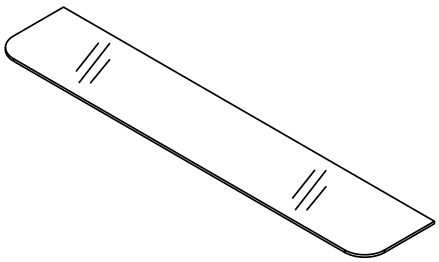

Jx4














Kx2




Lx2

1

Accessories list


①		Two in one screw (6x28mm)	26pcs +2pcs
②		Two in one nut (10x12mm)	26pcs +2pcs
③		Laminate support nail	8pcs +2pcs
④		Glass clamp	8pcs +2pcs
⑤		Backboard card strip(644mm)	2pcs
⑥		Wire clamp	1pcs
⑦		Fixing clip & screw (3x16mm)	6pcs +1pcs
⑧	Wall-mounted hardware 		
⑨		Rebound device & Screw (3x16mm)	4pcs +1pcs 1pcs
		Iron sheet	2pcs
		Hinge	4pcs 2pcs 2pcs
		AC/DC Adapter (12V⎓2.0A)	1pcs

Double-head screwdriver, use as required

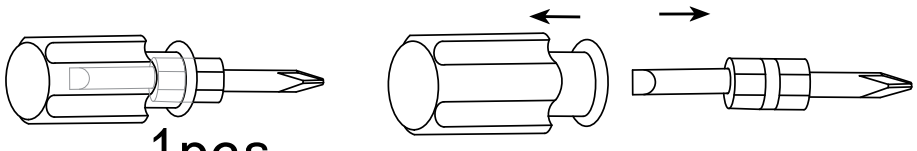


1pcs

Product structure decomposition

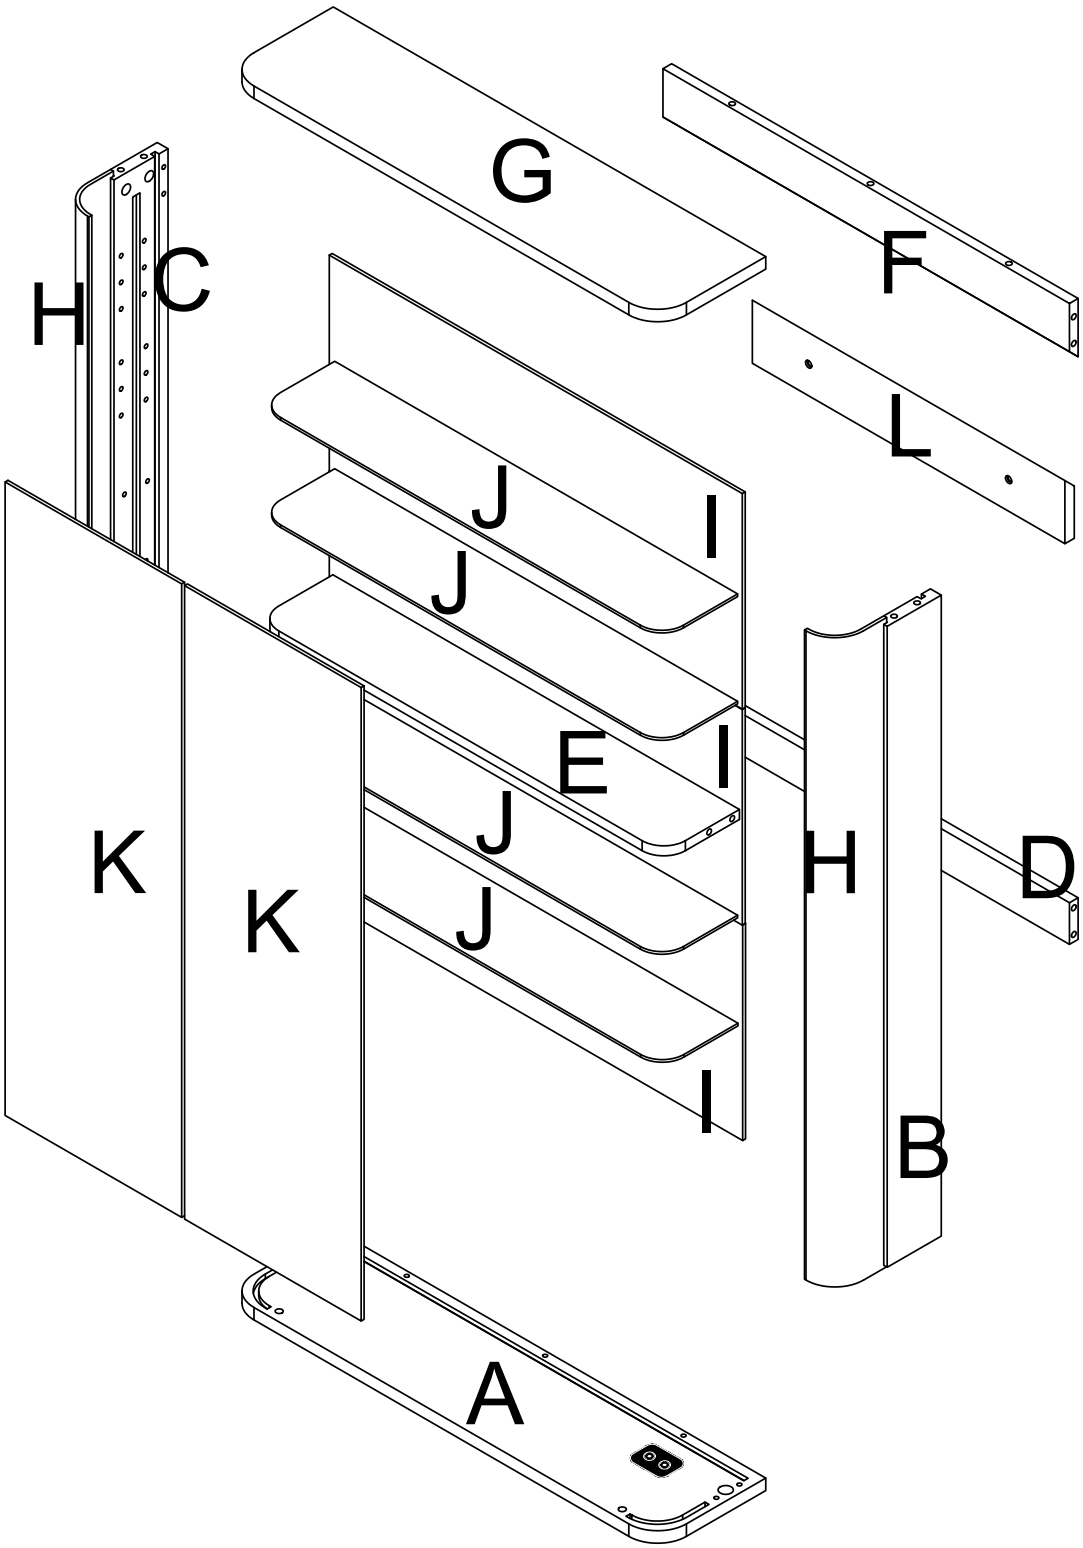


Use parts ① and ②


Step1

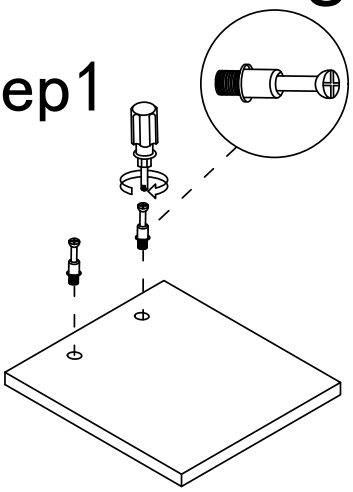


Step2

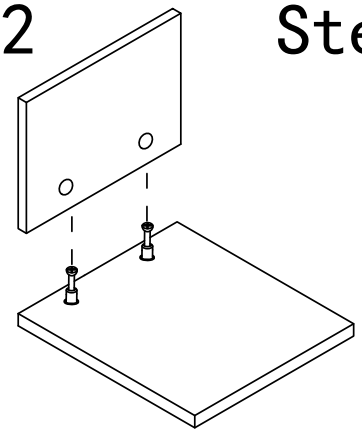


Step3

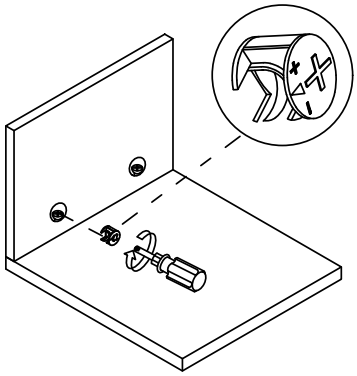

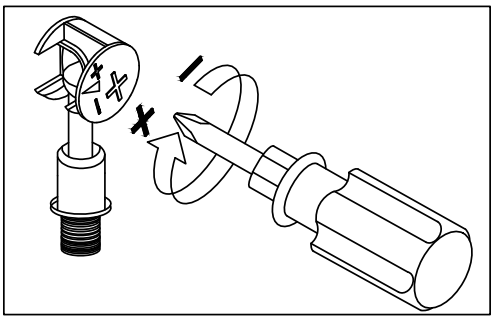



Use a screwdriver to lock in the direction of the "+" sign

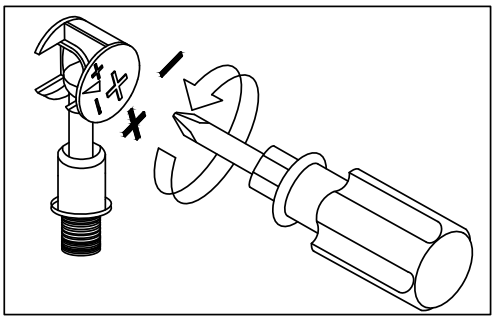


Disassemble along the direction of "-" sign

Step 1




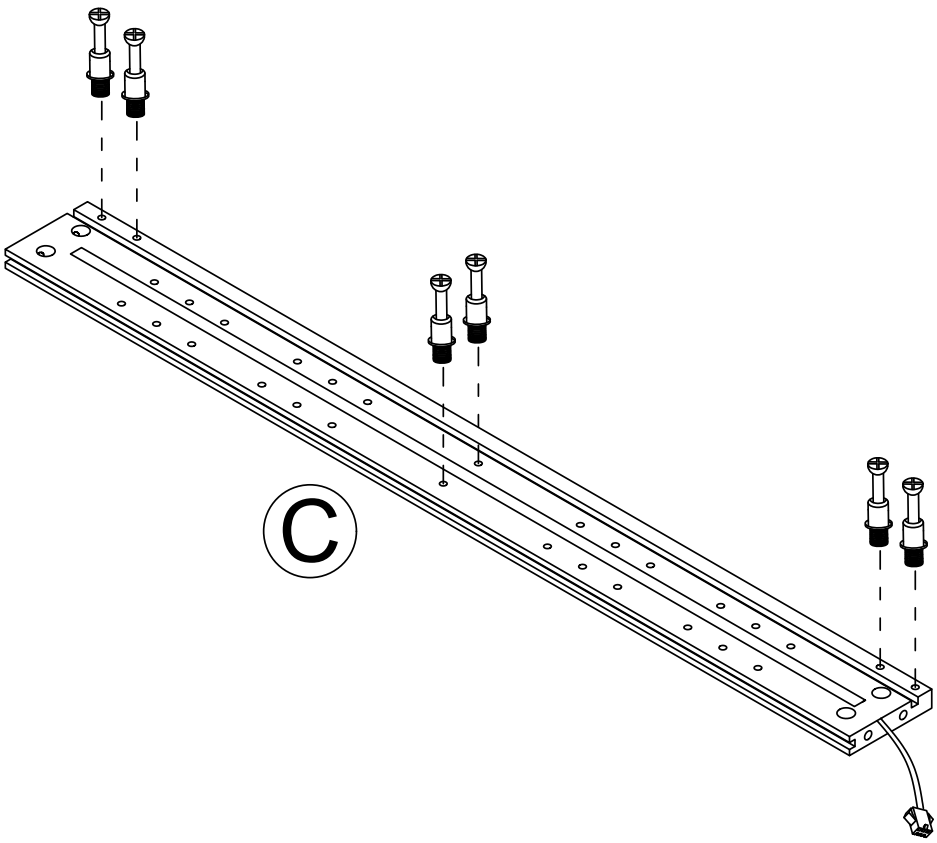

Step 2

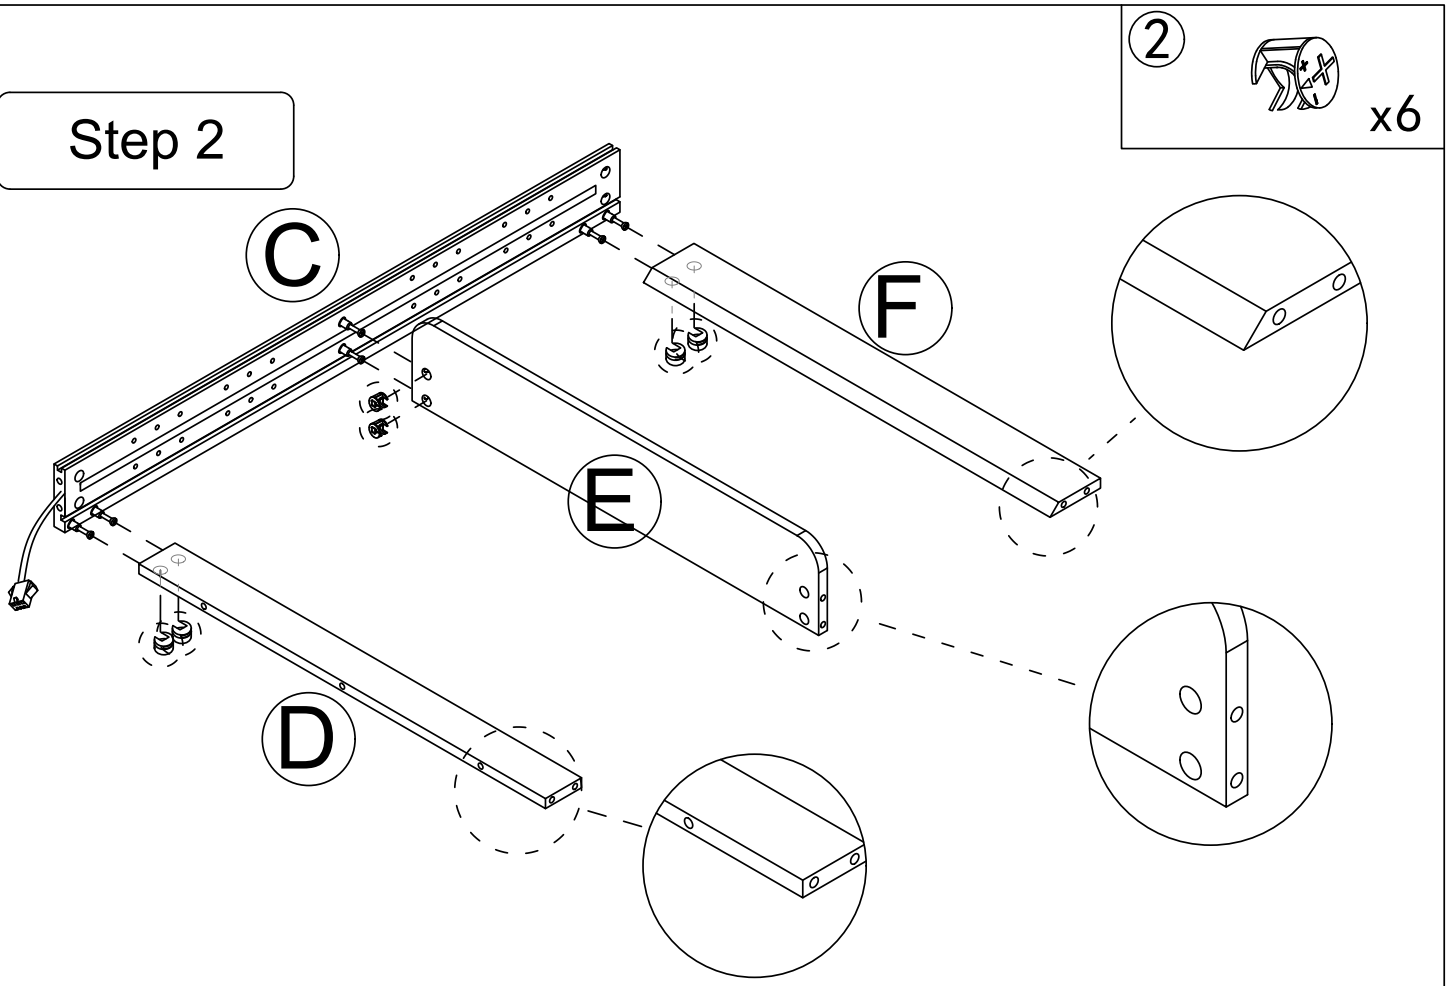


Step 3

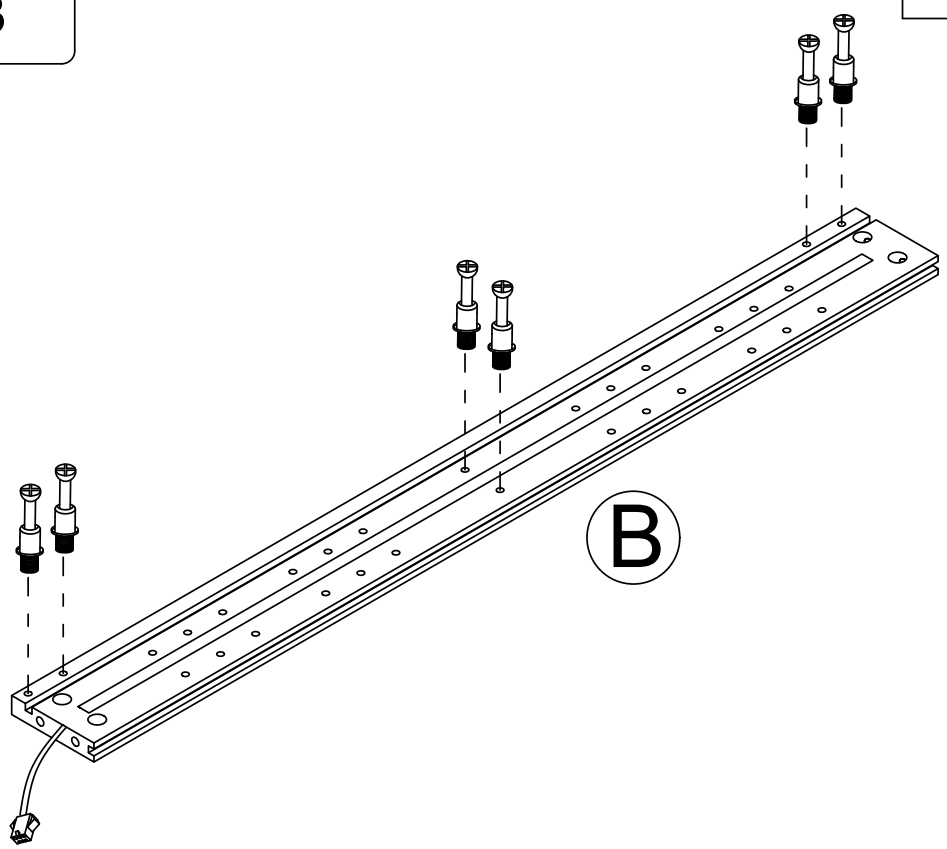


Step 4

2 x6

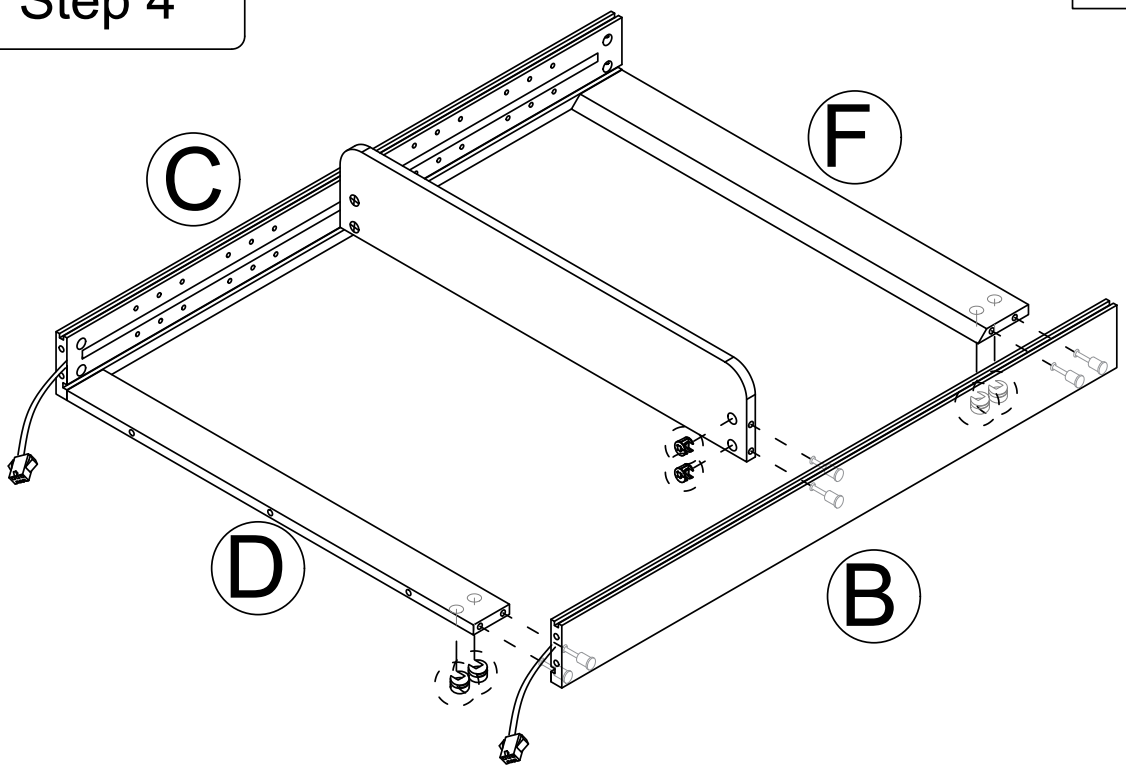


Step 5

1 x7

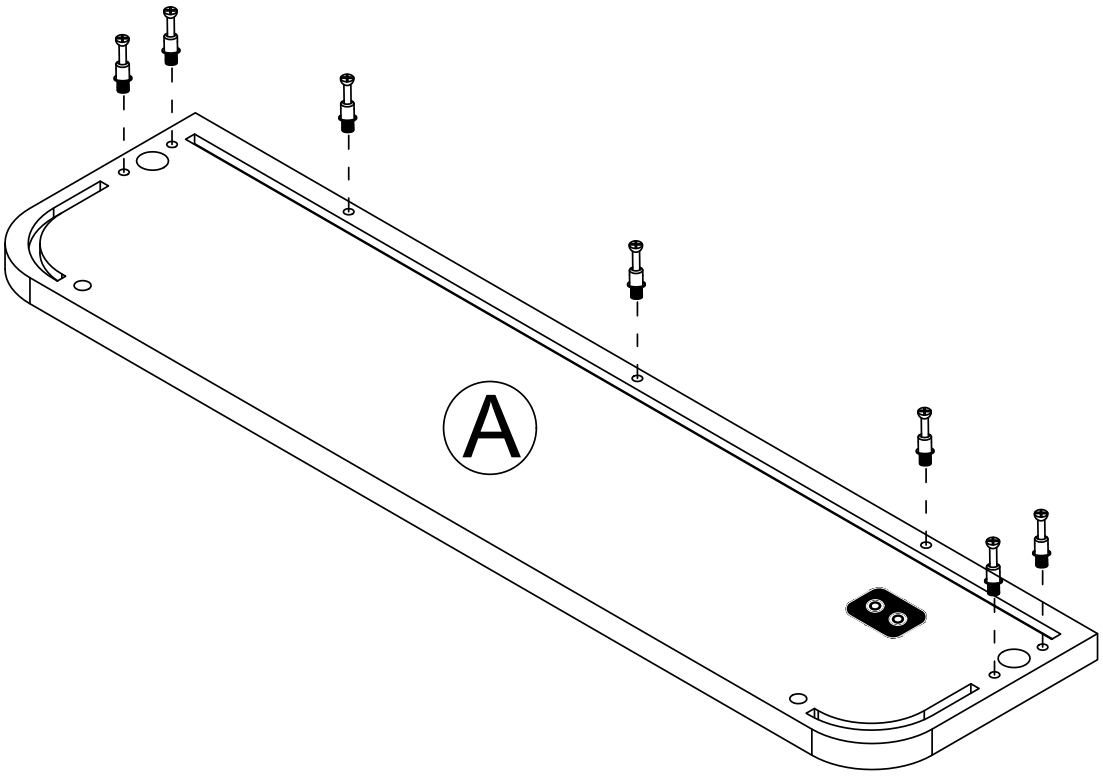


Step 6

2 x7

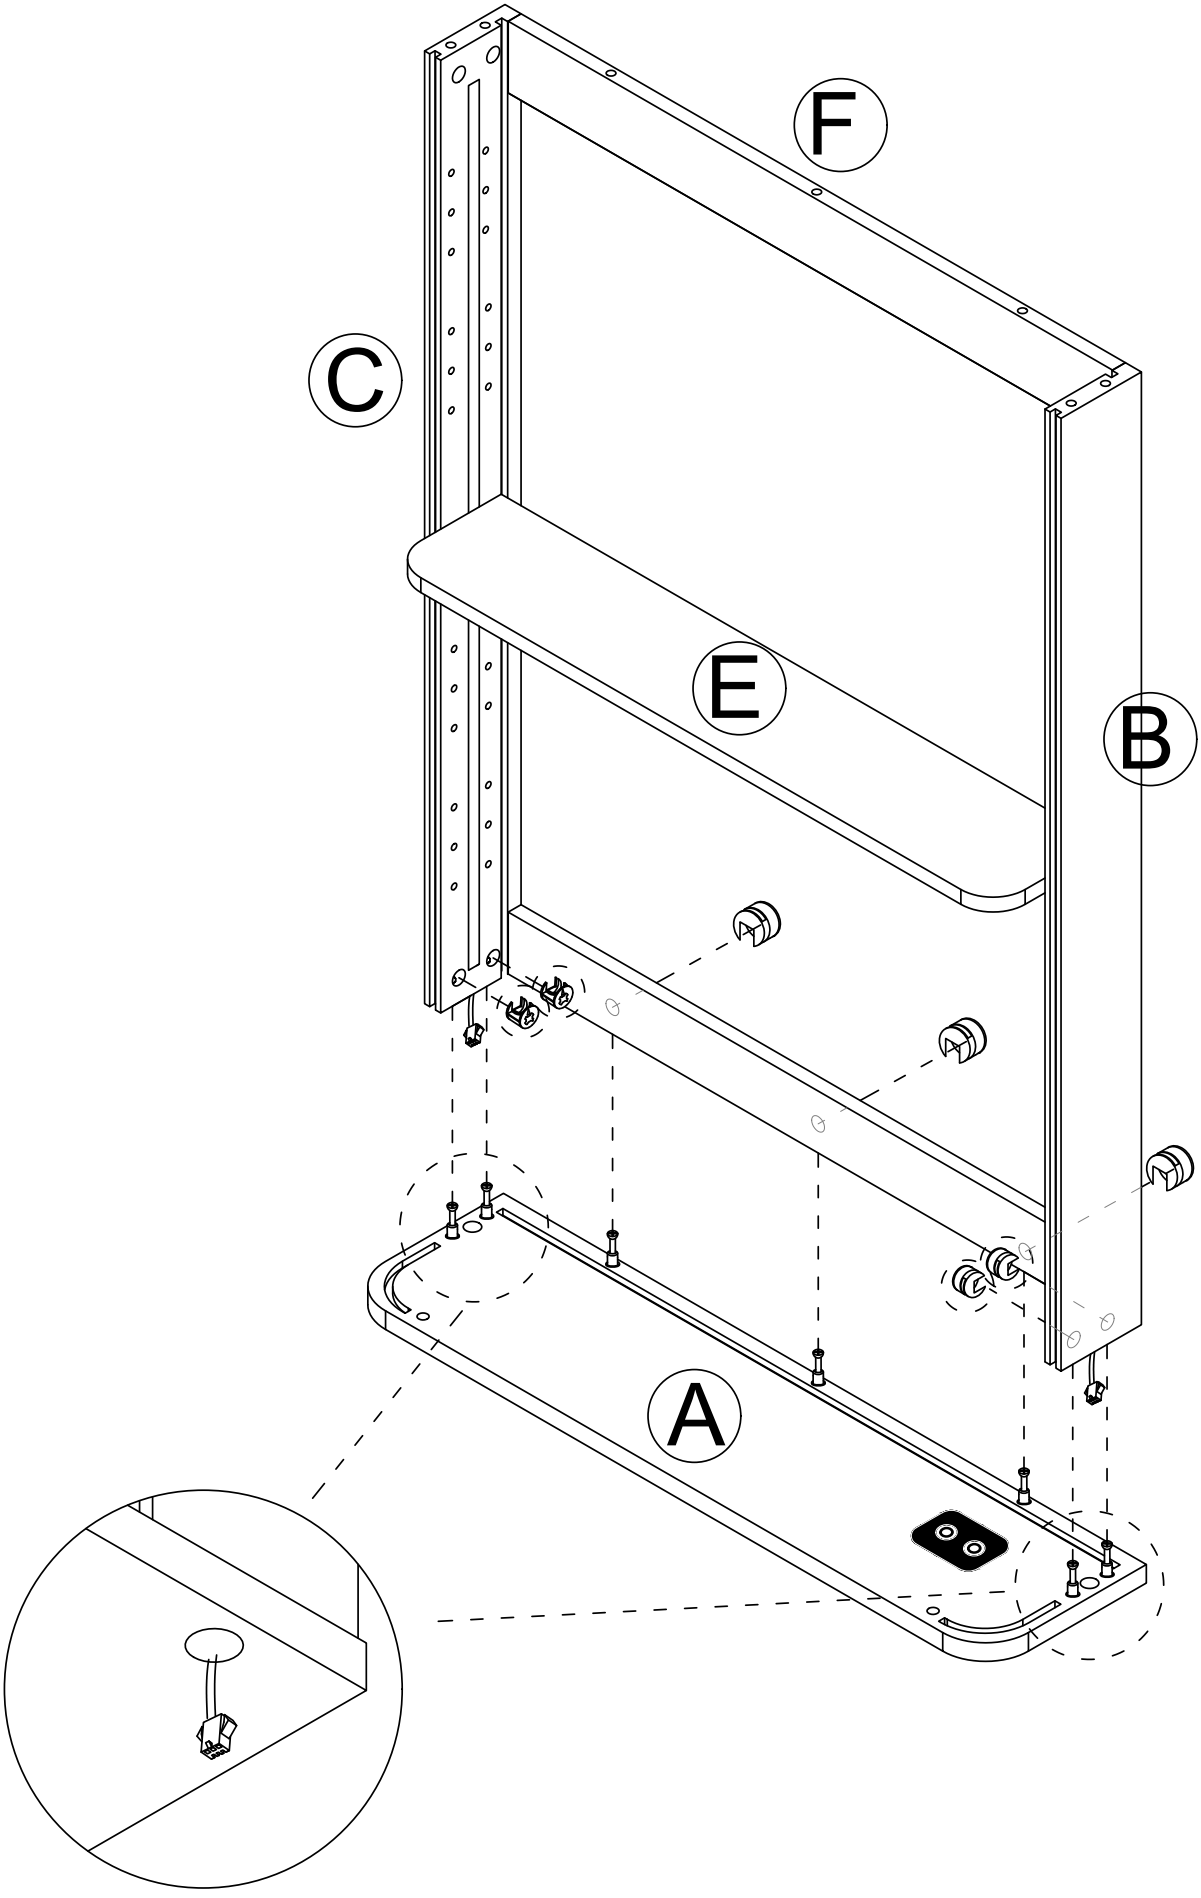



Step 7

5 x2

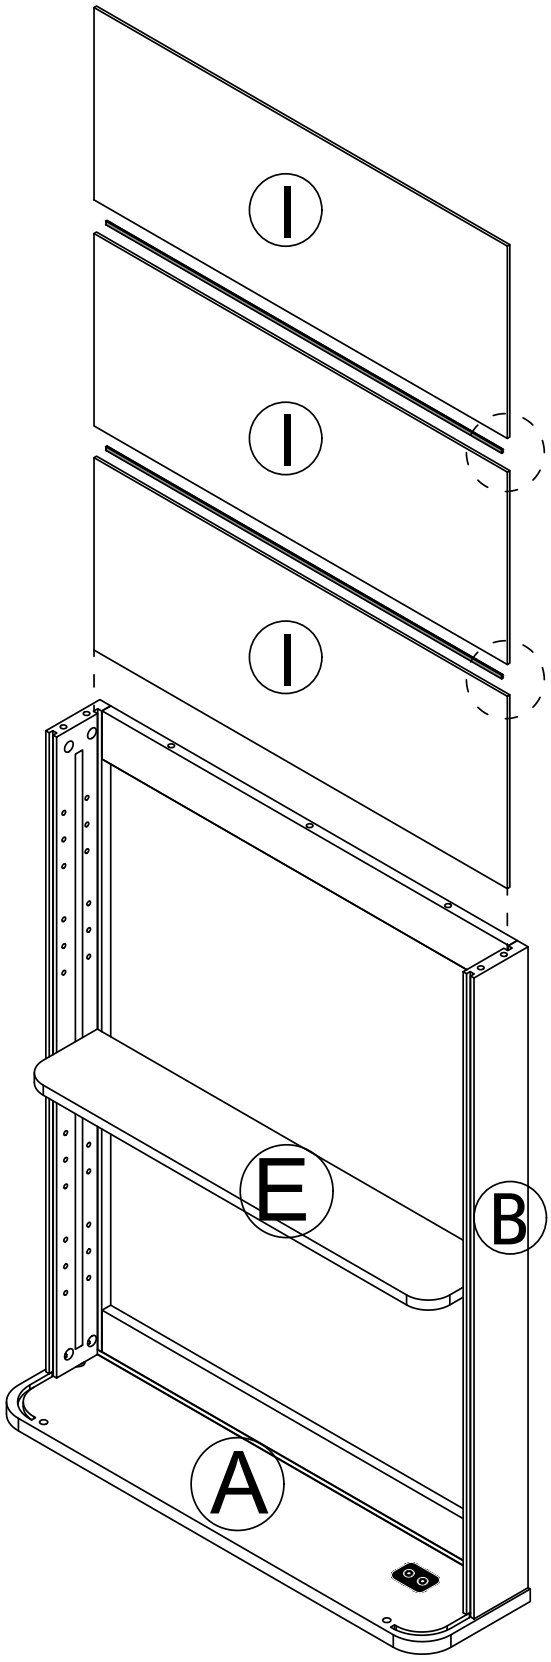


Place the "I" board, Backboard card strip, and "I" board in order







Step 8

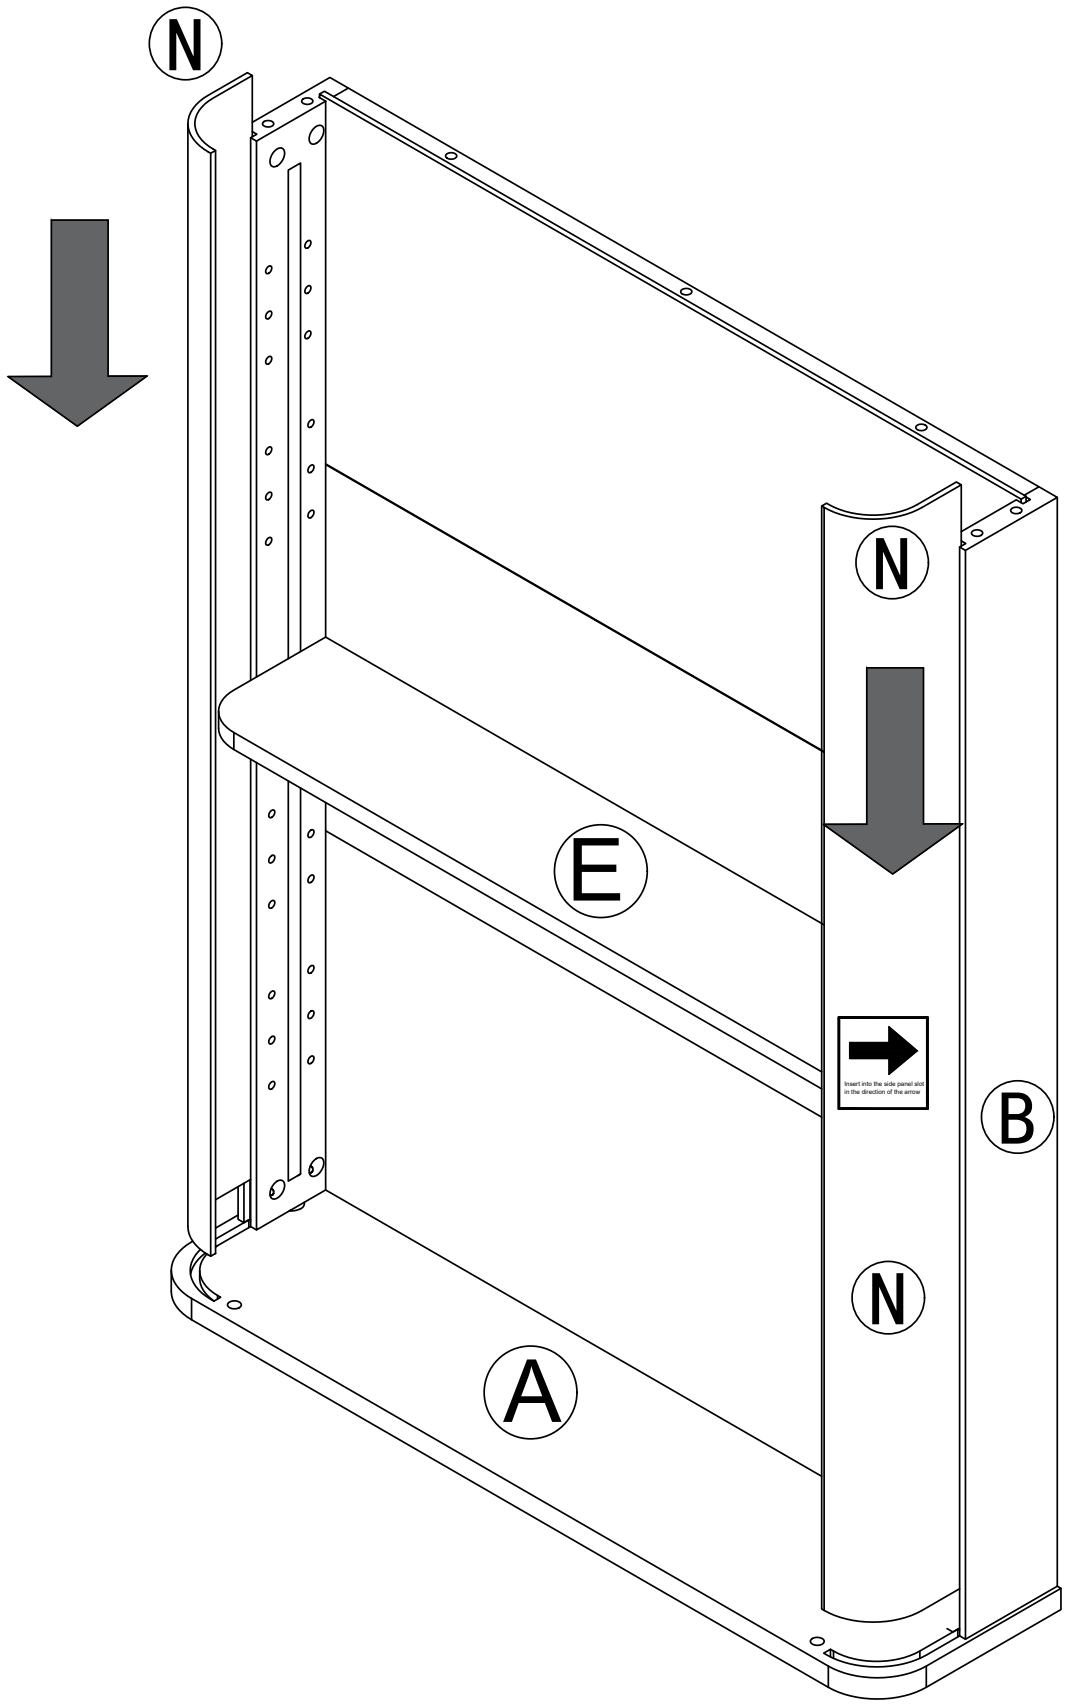

N
N
E
Insert into the side panel slot in the direction of the arrow
B
N
A


Step 9

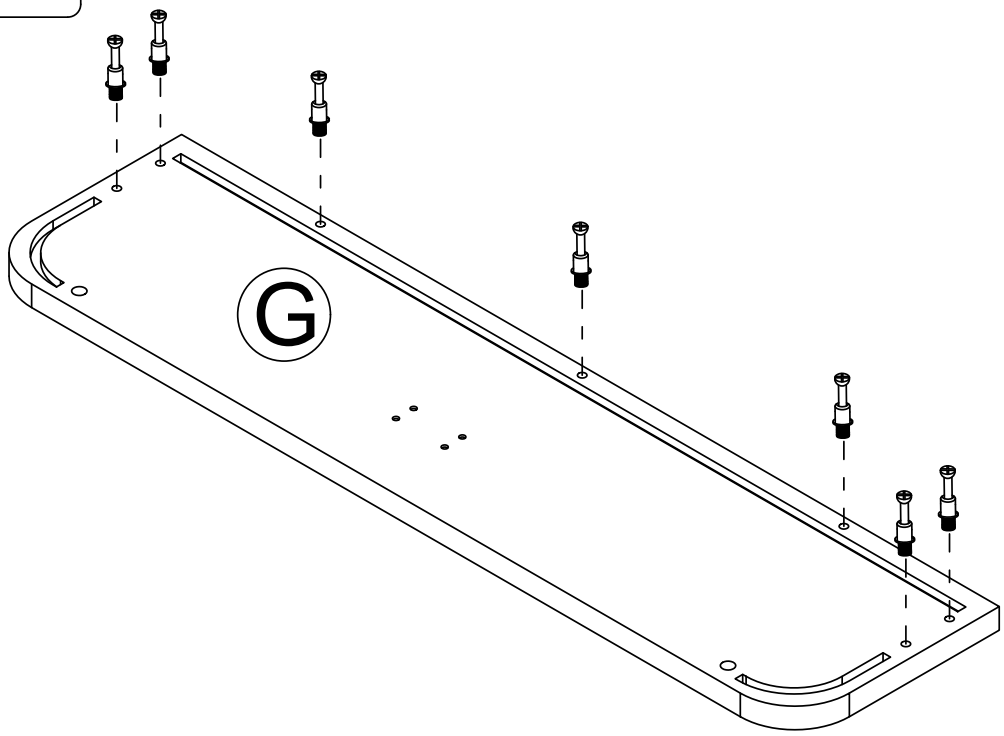




Step 10

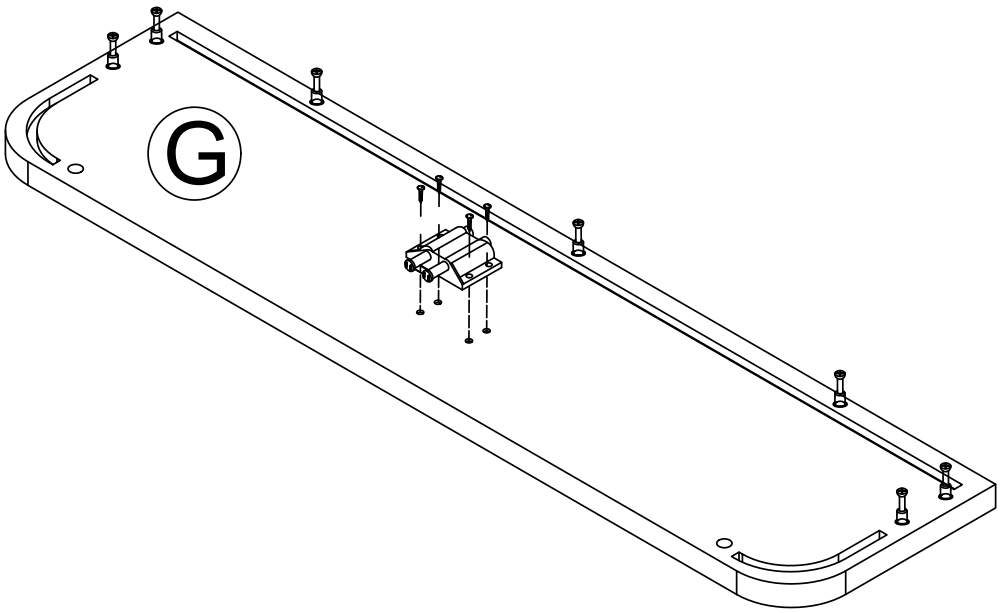

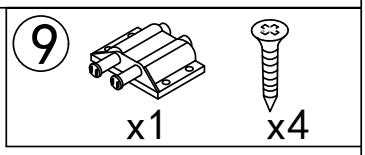



Step 11


2 x7

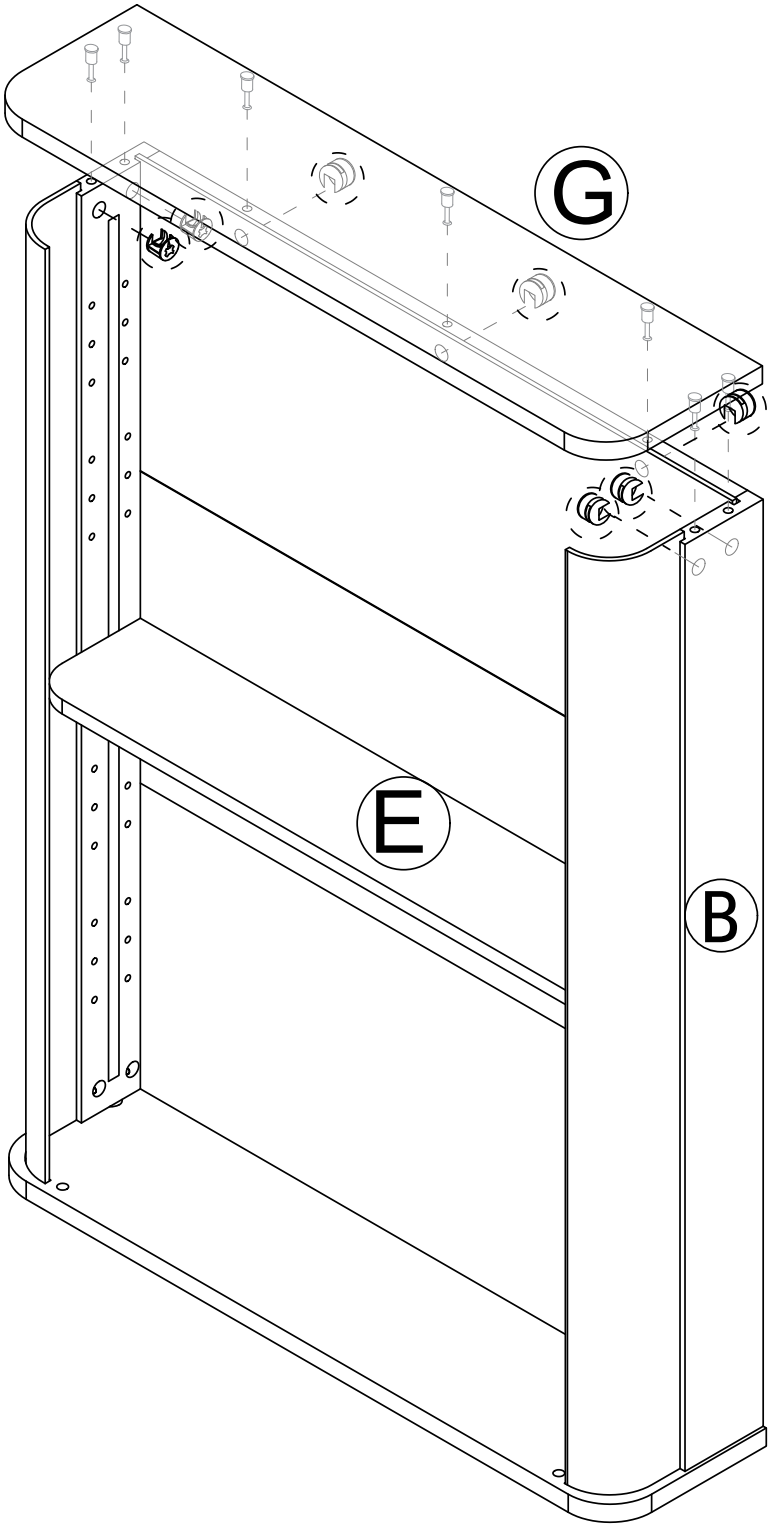


Step 12




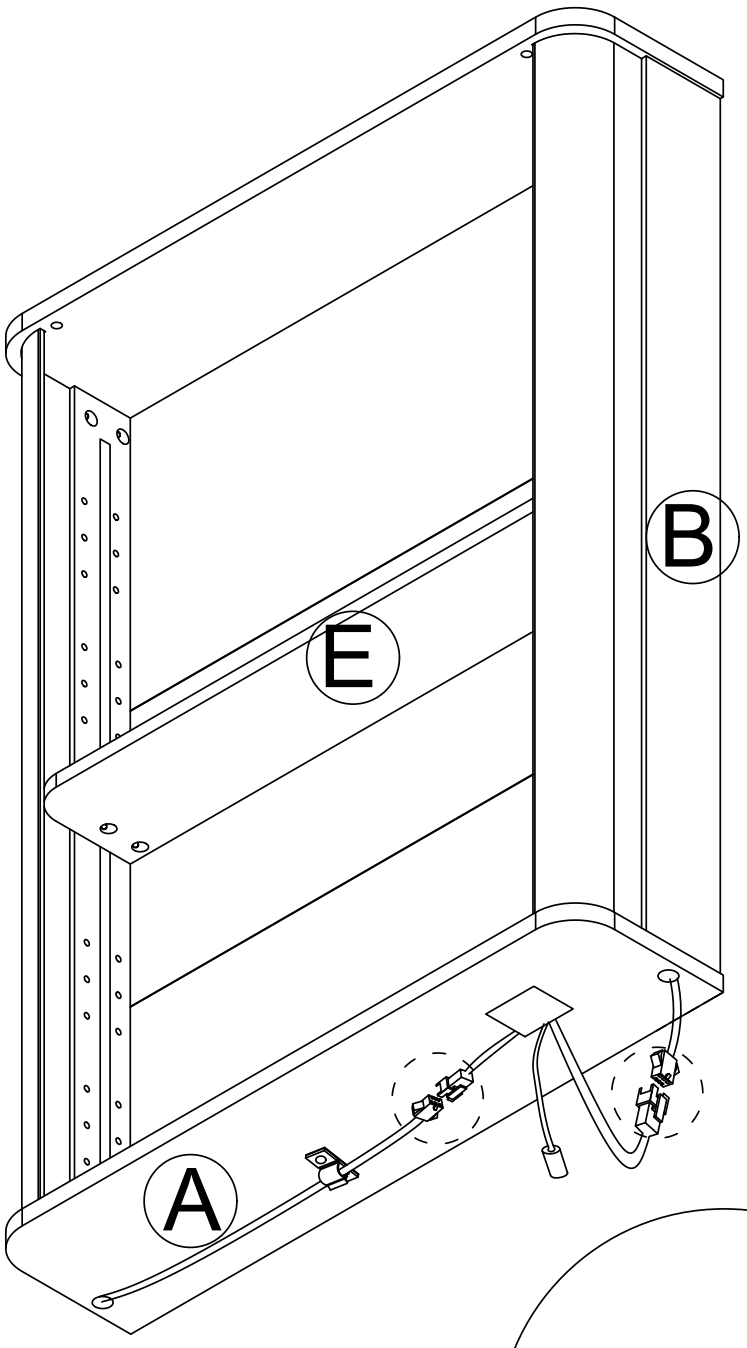

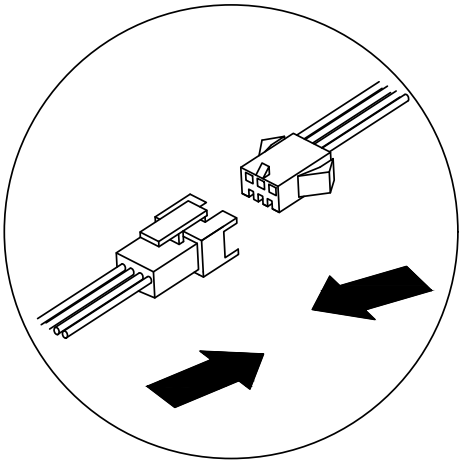


Step 13




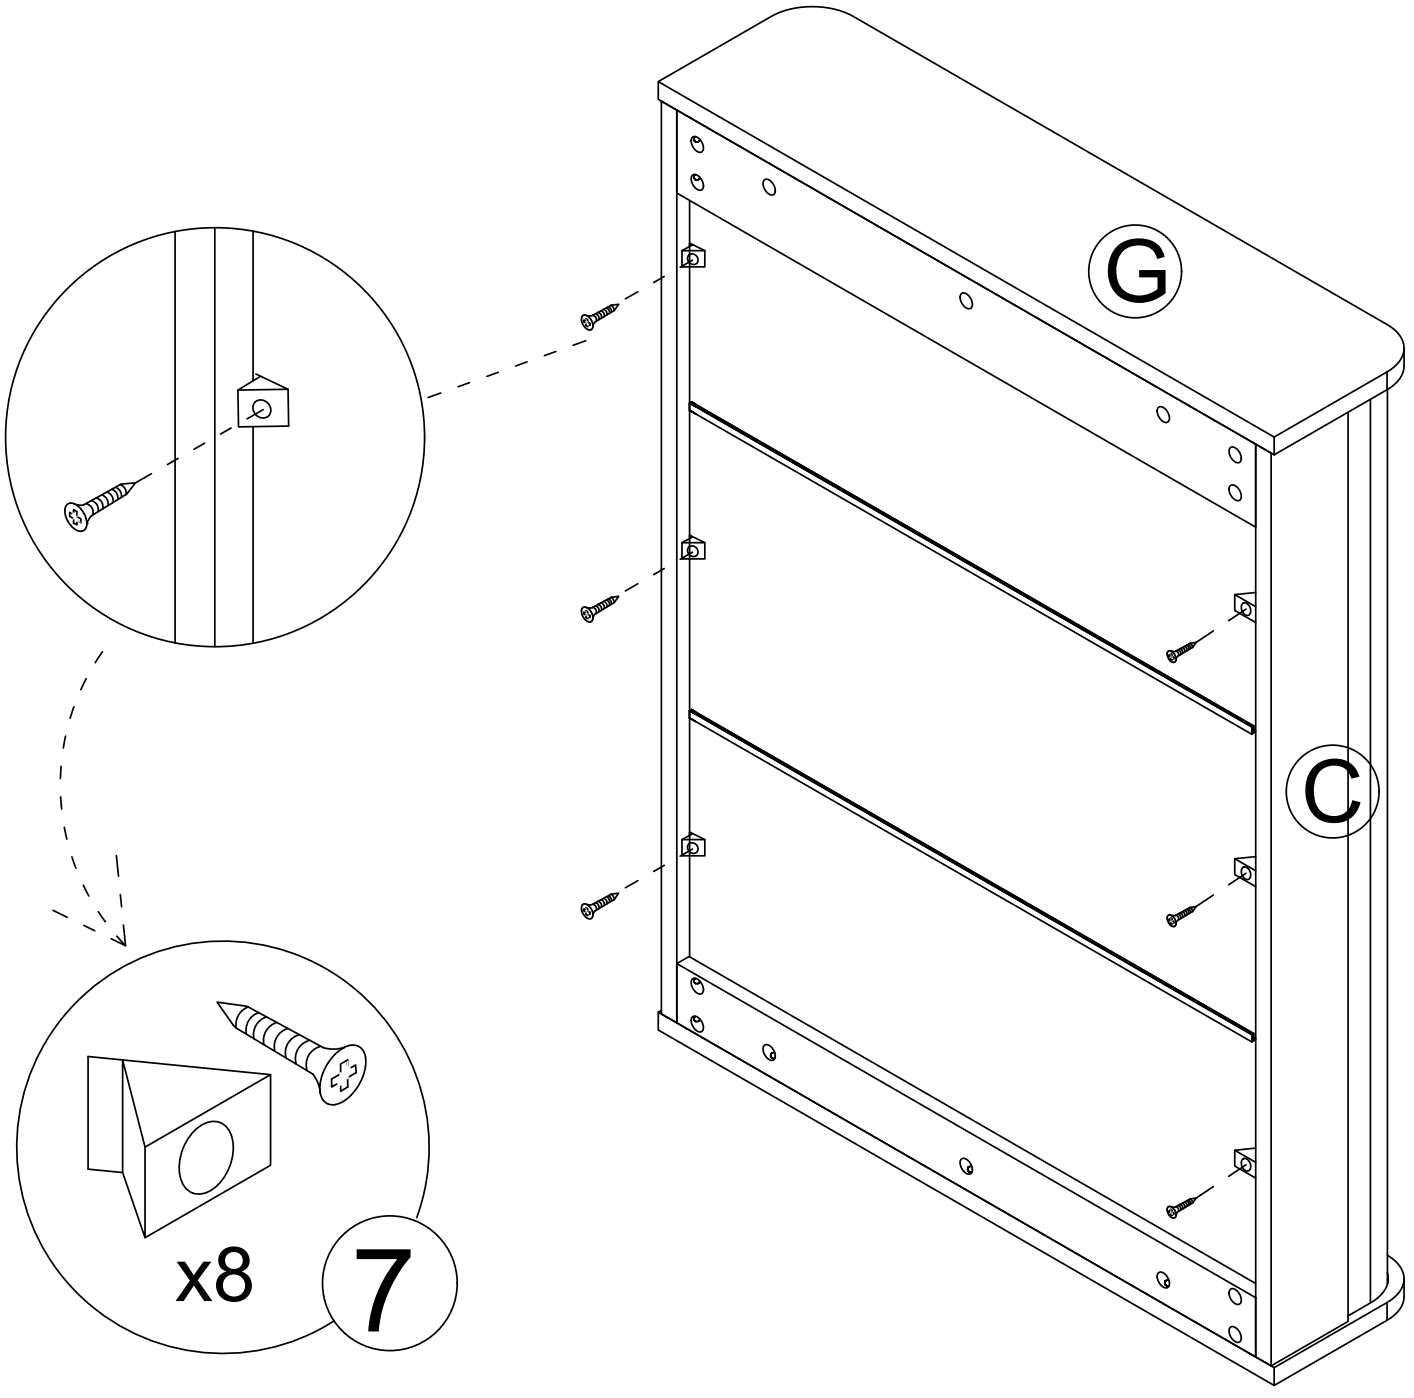


Step 14

8



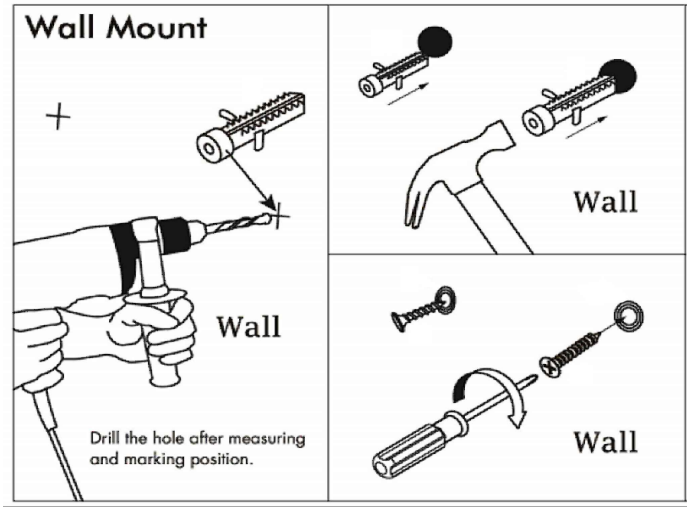


1.Choose the height that suits you
Drill the hole with an electric drill and punch in the colloidal particles

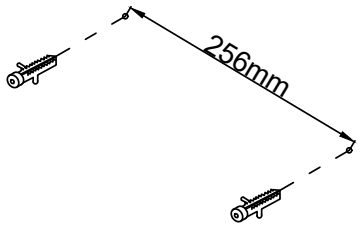


Wall

2.Fix the L board to the wall

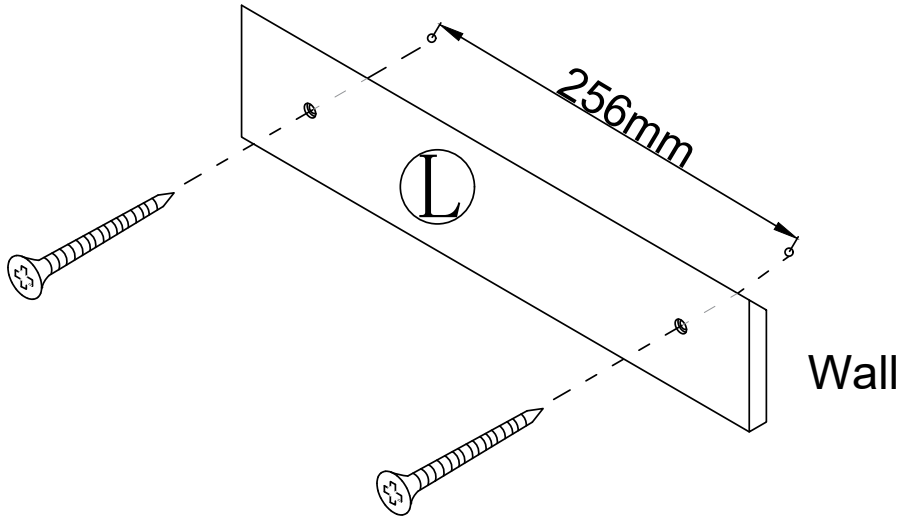


4x45mm

Step 15




Insert it into the cut

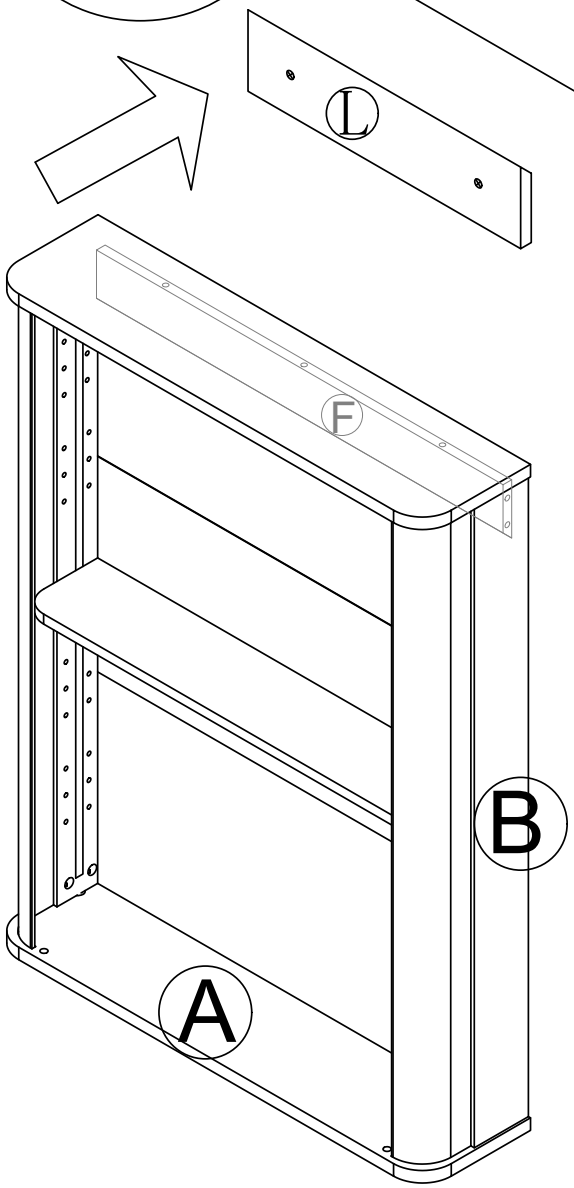

Wall

Step 16


8 x2 x2 x2

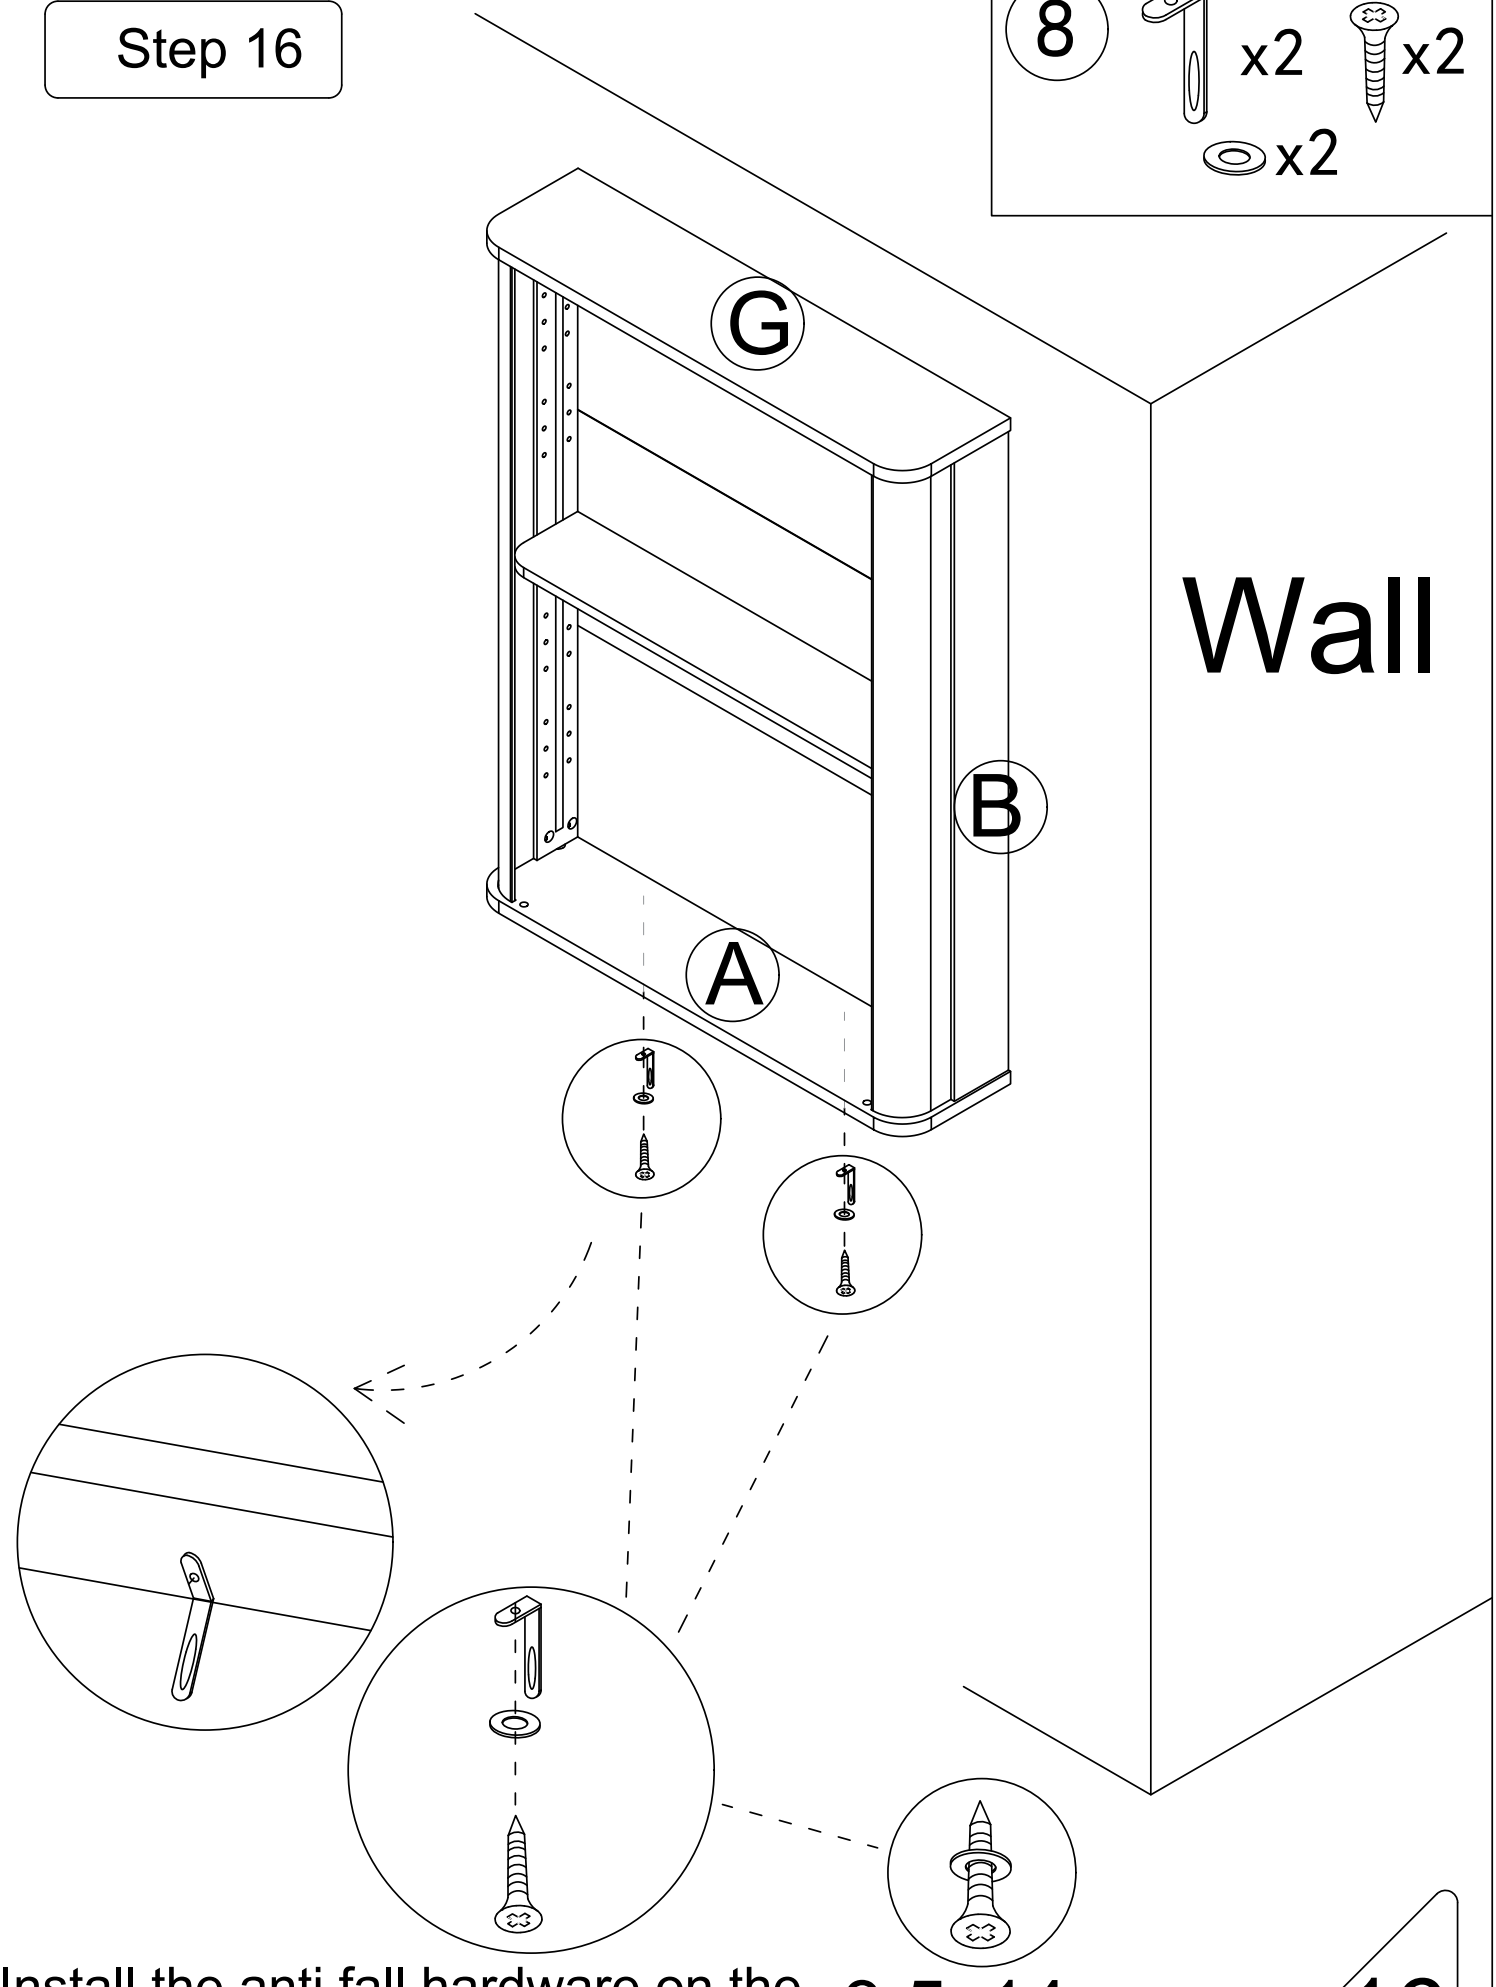


Install the anti fall hardware on the cabinet as shown in the picture first


3.5x14mm

Step 17




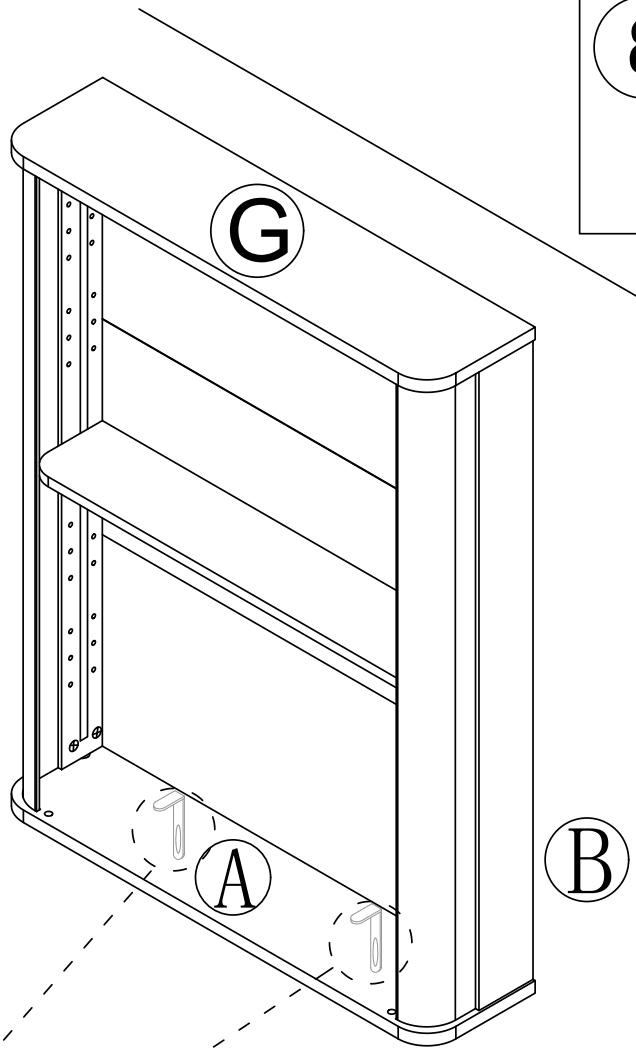

Wall

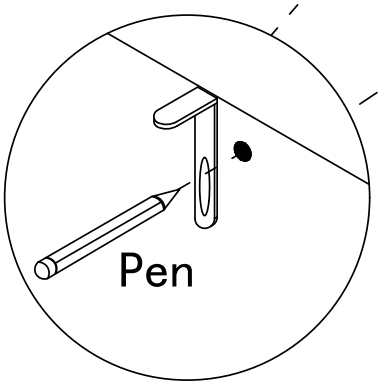

1.Then mark the wall with a pen
through the holes in the anti-fall hardware

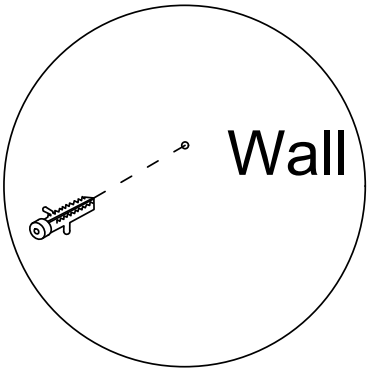


2.Remove the cabinet body
drill holes at the marked positions
punch in the colloidal particles


Step 18

8 x2

x2


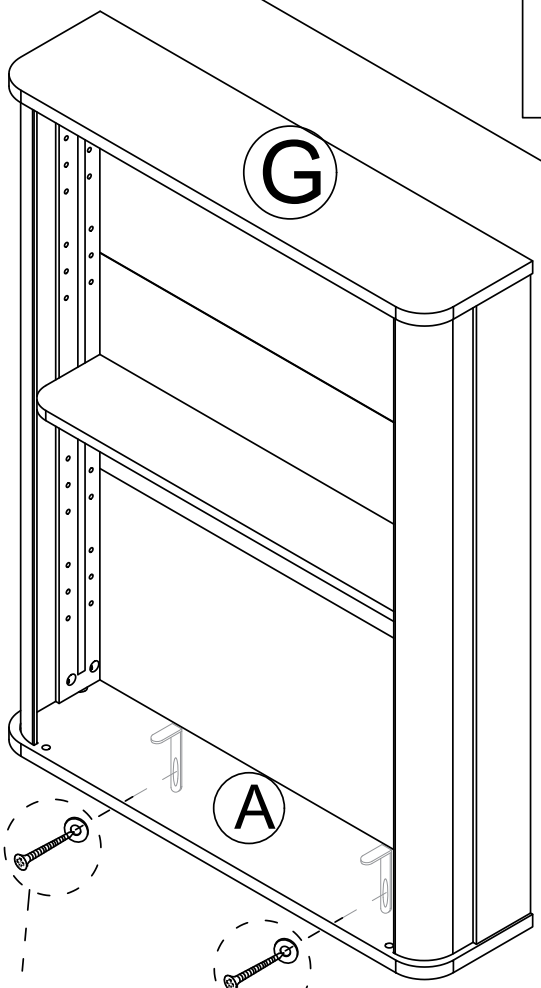



Wall

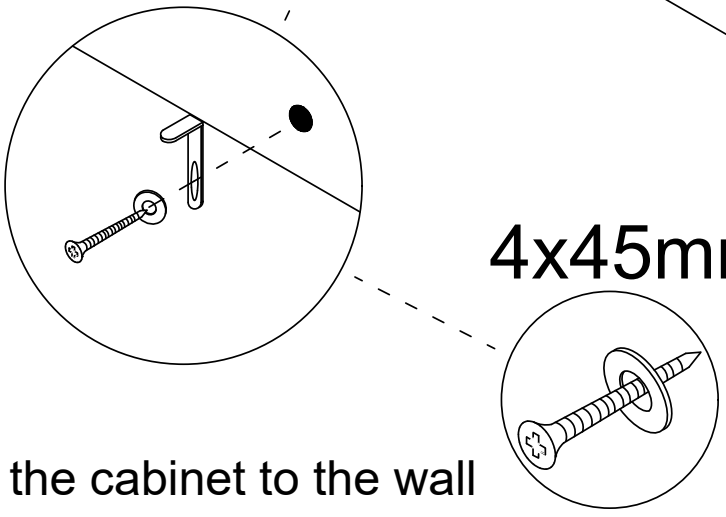

Fasten the cabinet to the wall

Step 19


③ 	x8
④ 	x8

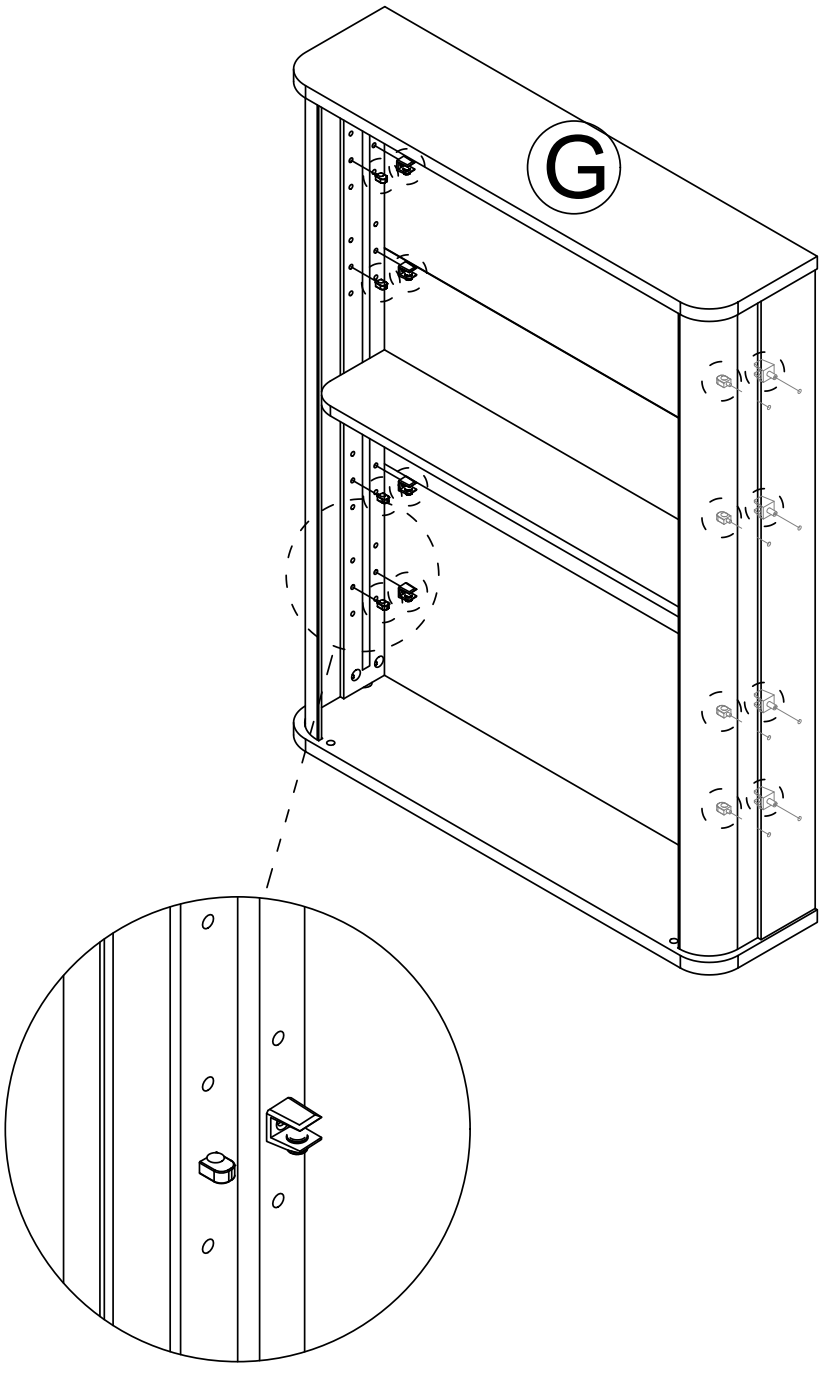

Completed Assembly Drawing

Step 20


Secure the glass with glass clips, then fit on the shelf supports.

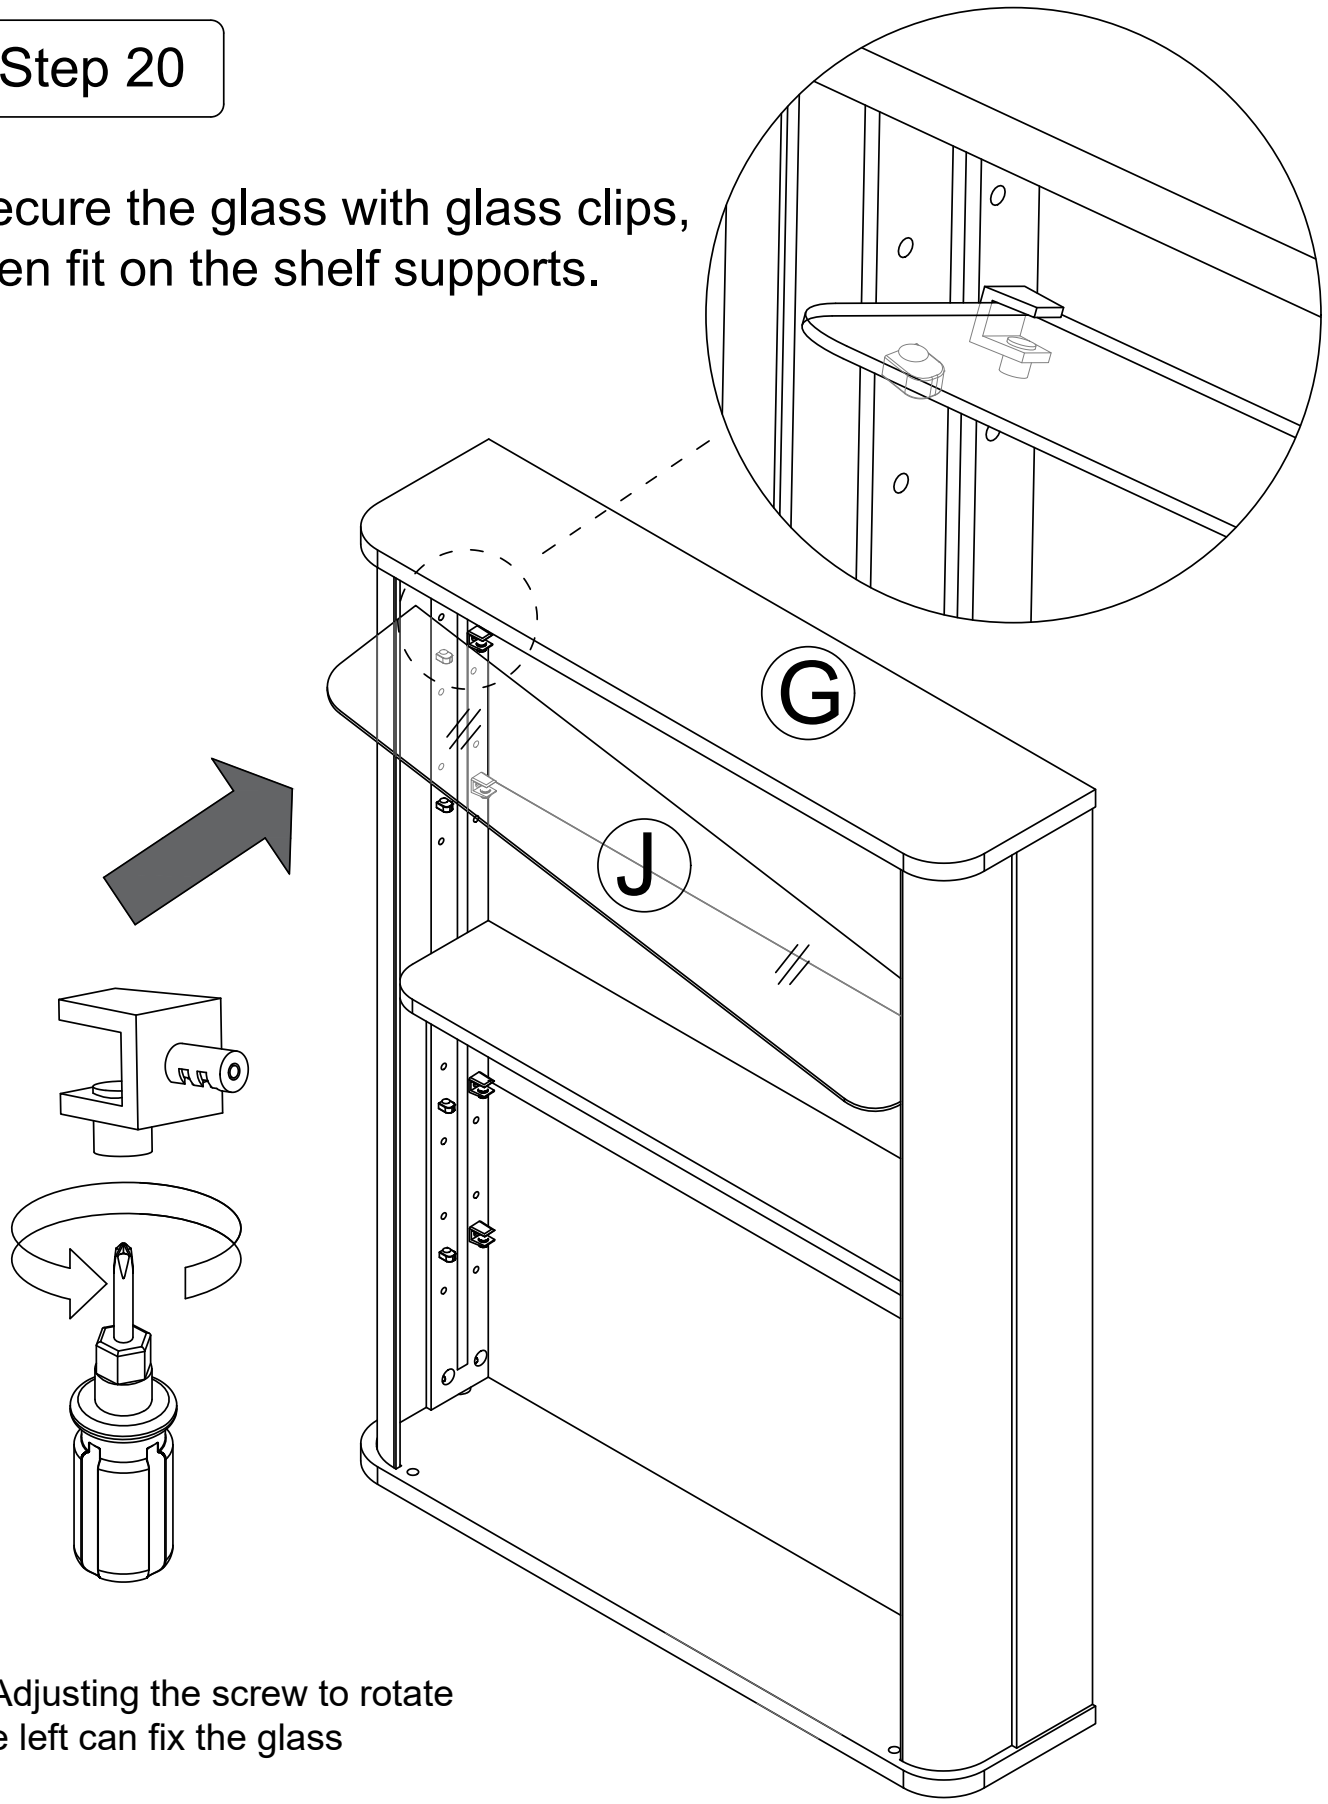

Tip: Adjusting the screw to rotate to the left can fix the glass


When installing, tilt the shelf glass slightly before placing it into the cabinet.


Step 21

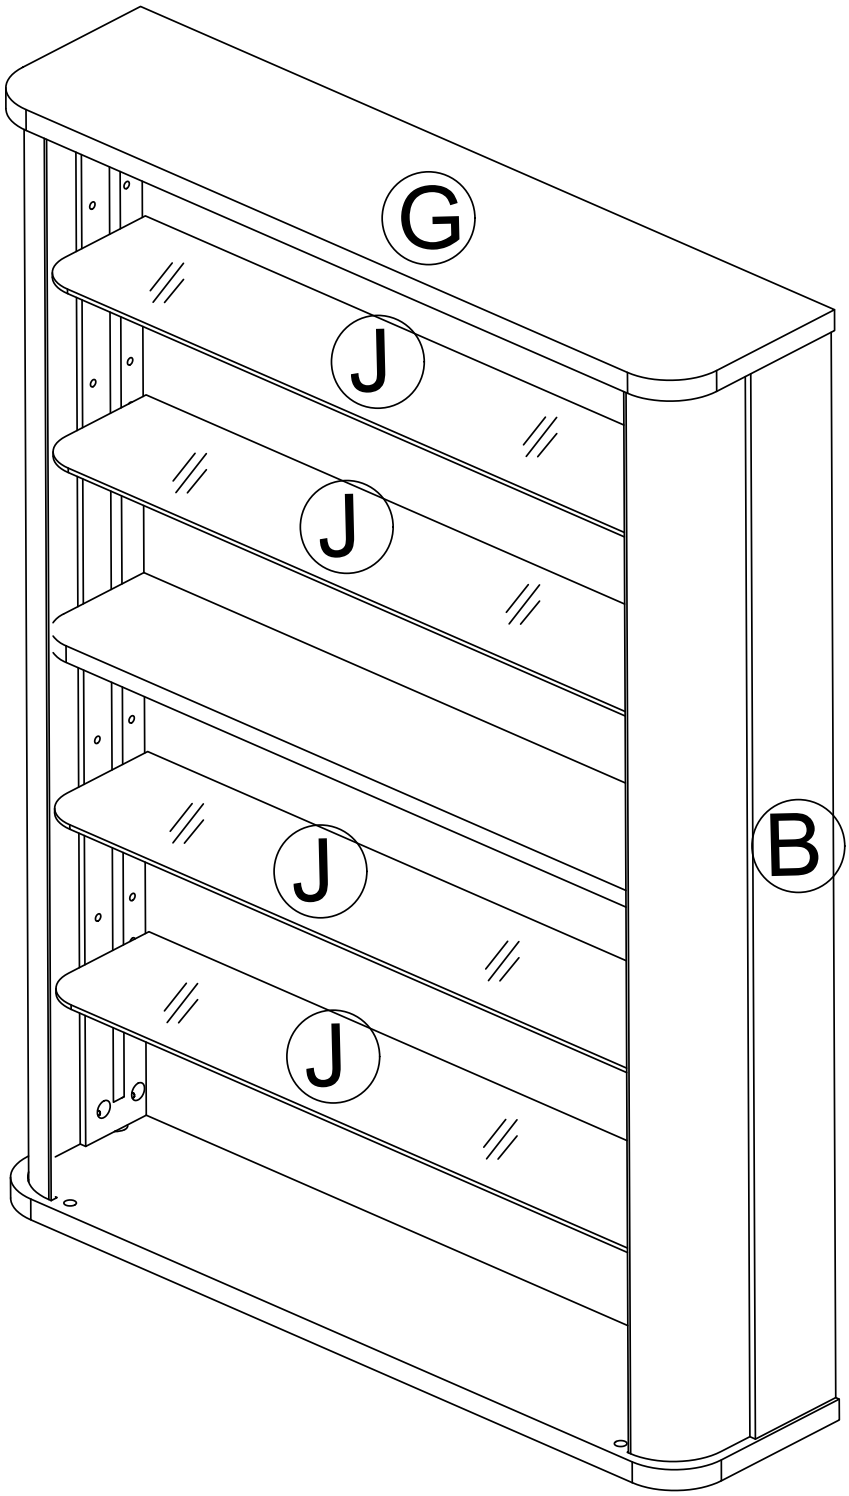

Follow the previous steps to complete installation of the remaining shelf glass.


Step 22



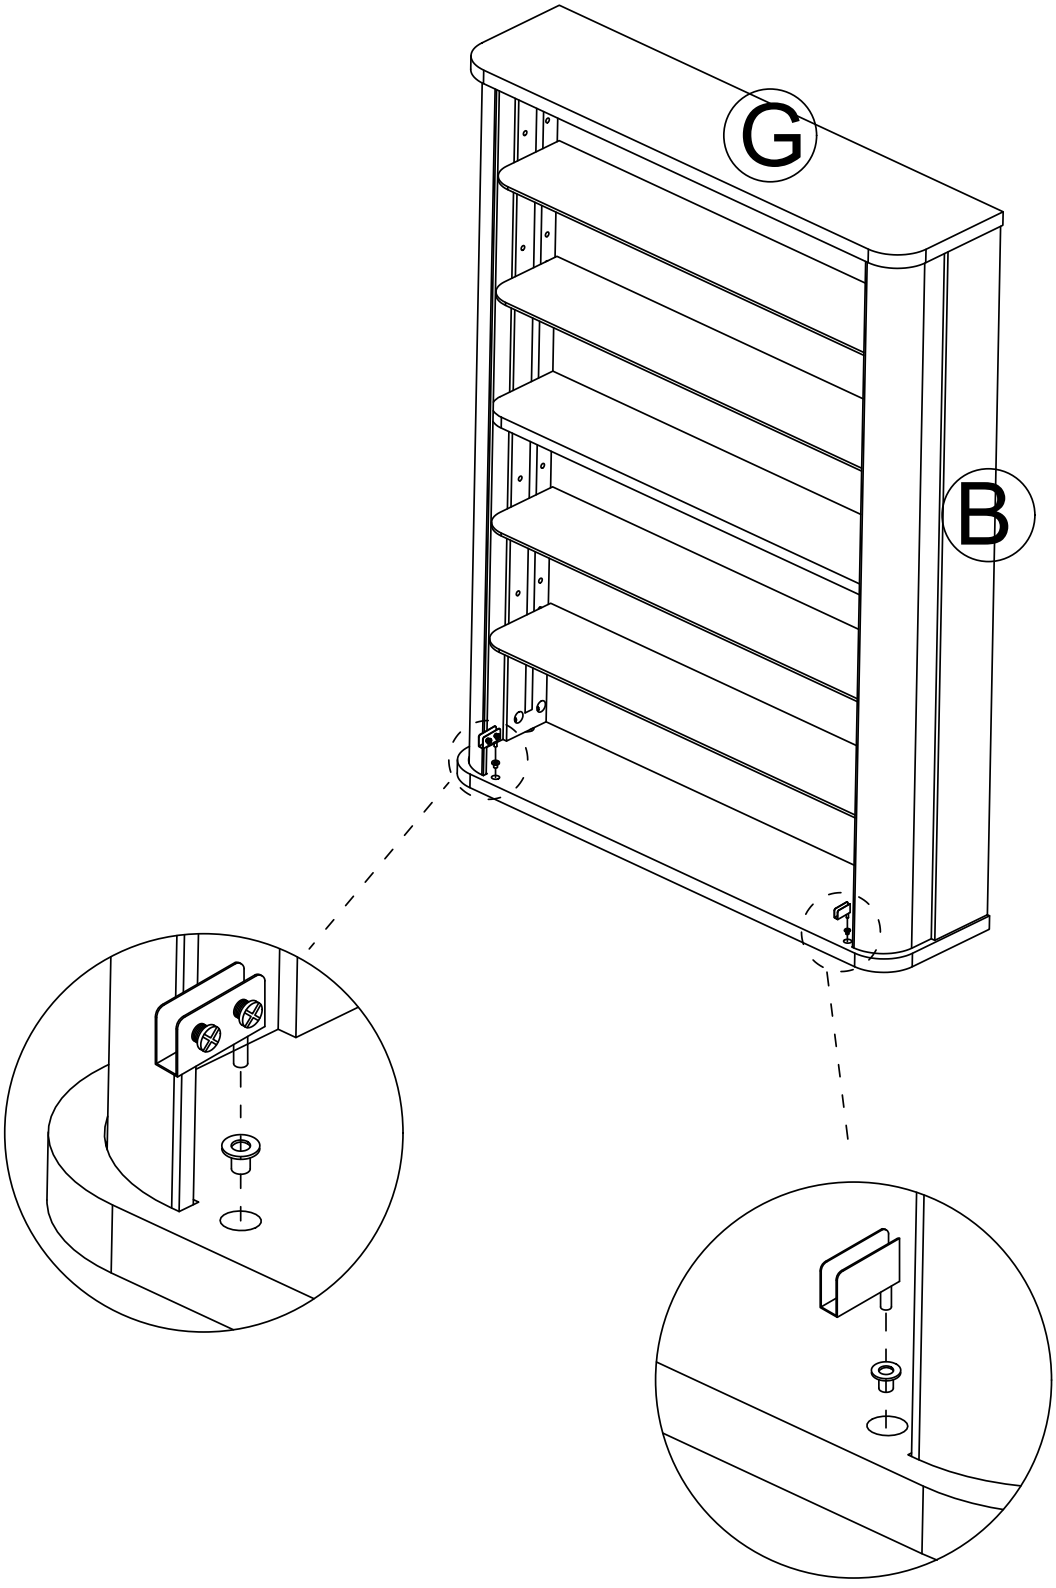


Step 23


First, completely unscrew the screws on the parts




Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

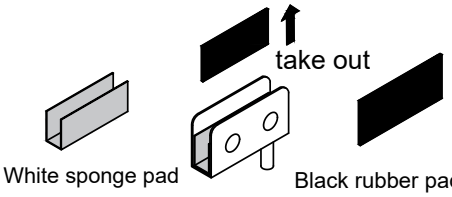


⑨ x1



x1




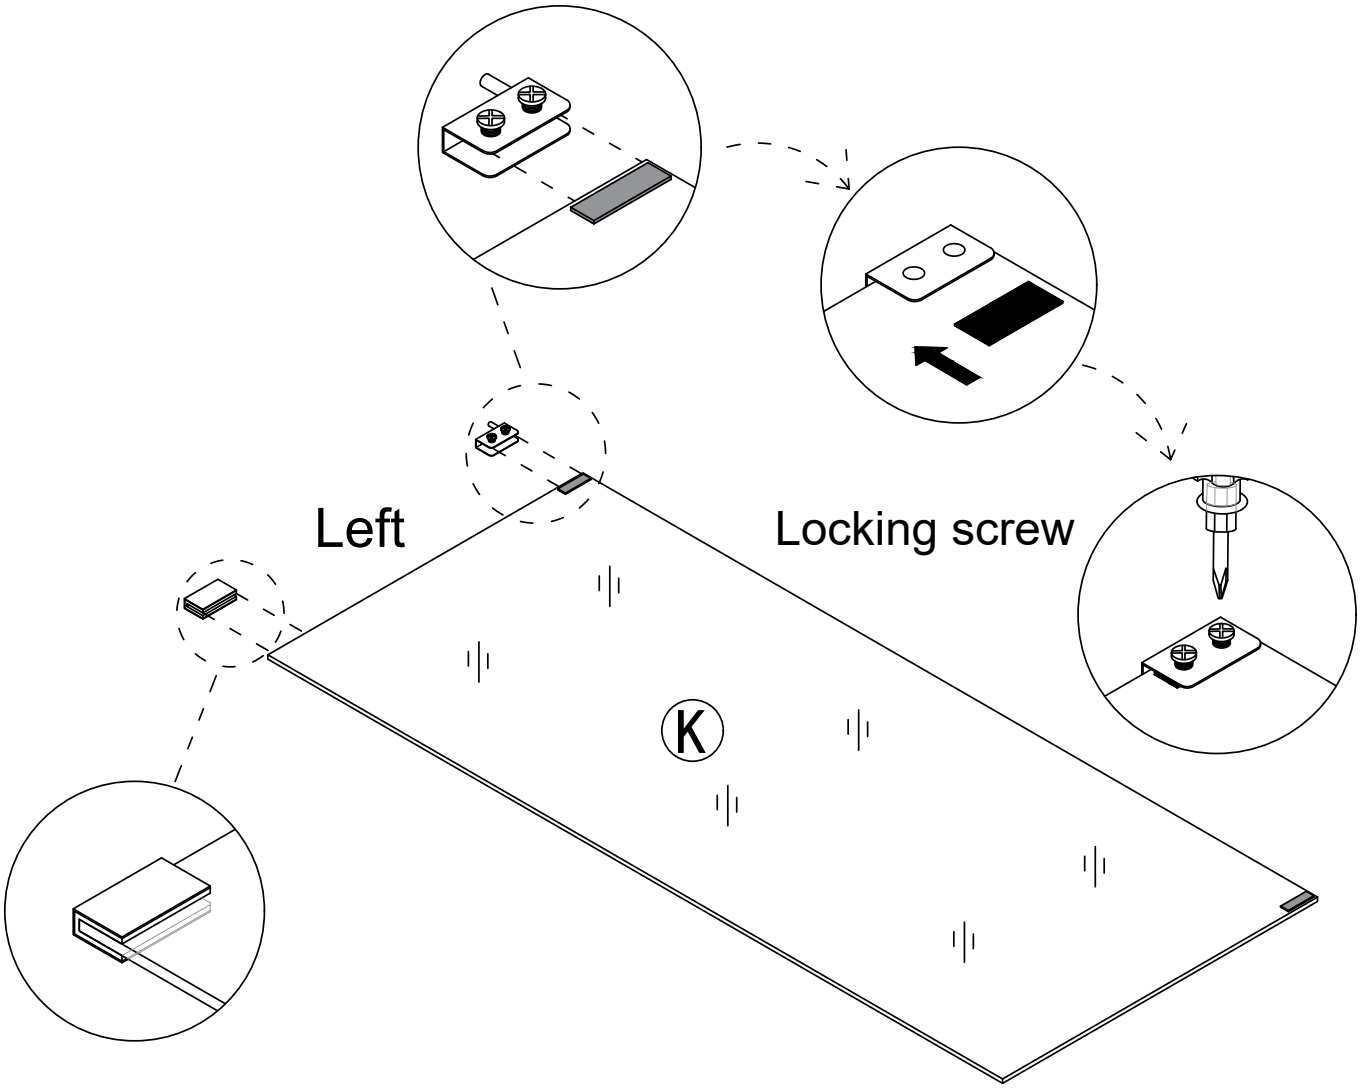


Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 24



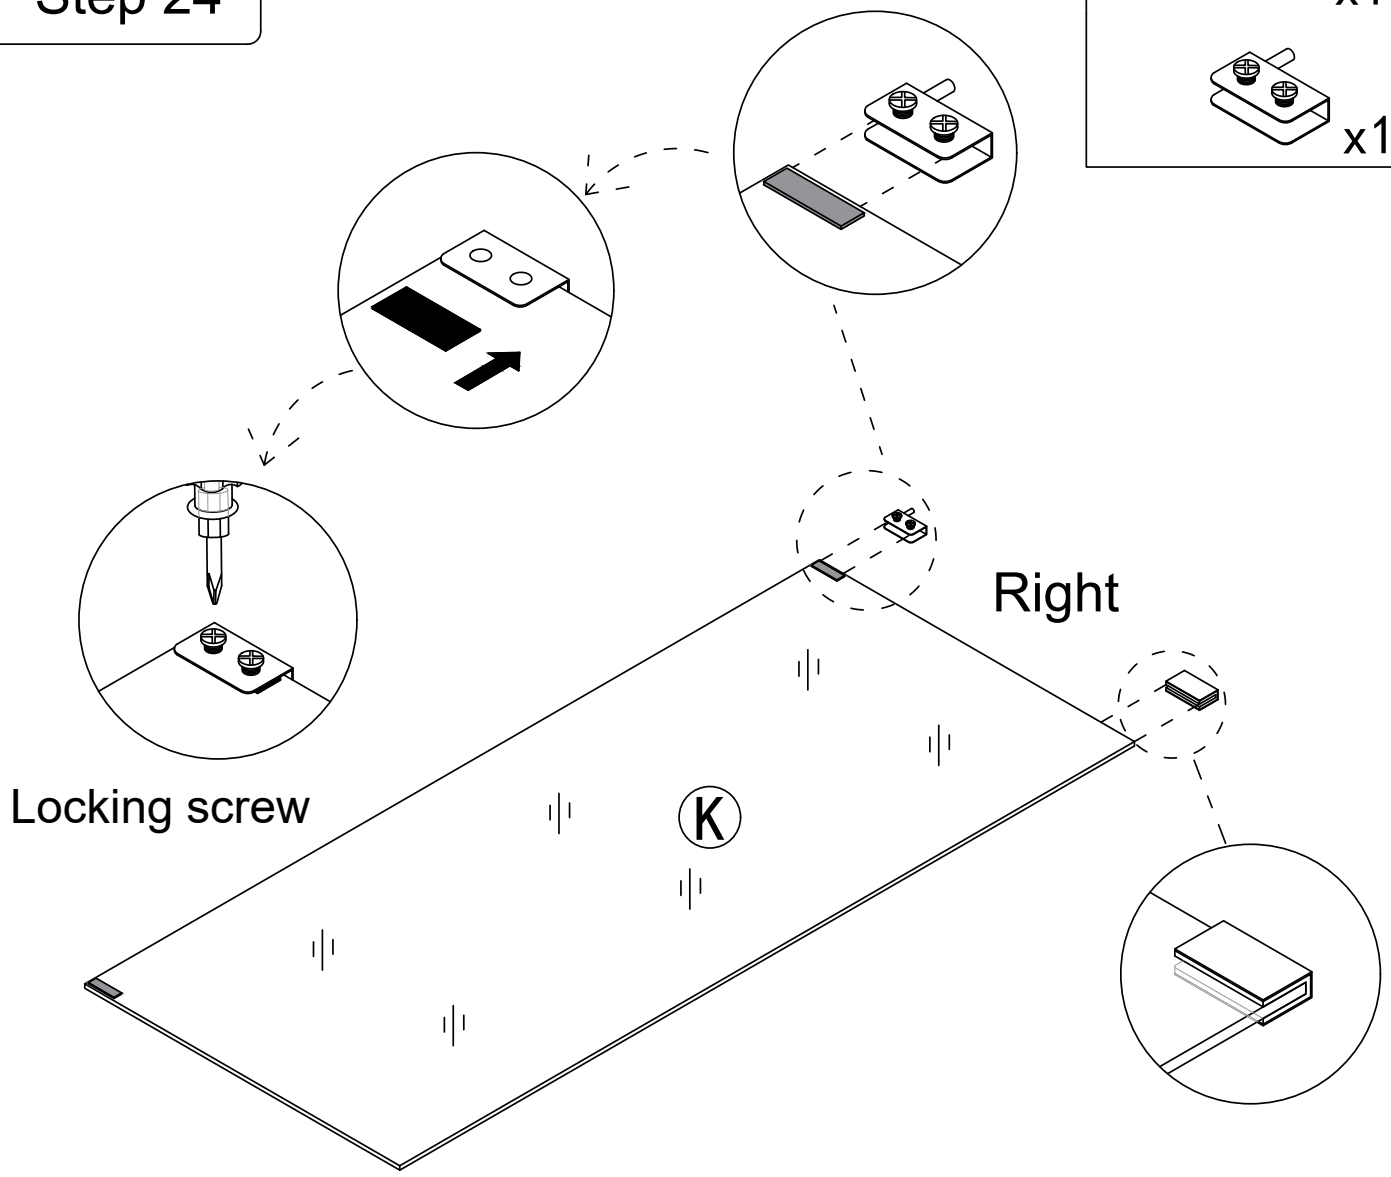

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction


Place the black gasket on the side where the screws are installed

Step 25


9 x2

Pay attention to the direction of
the door hinge during installation


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first



second

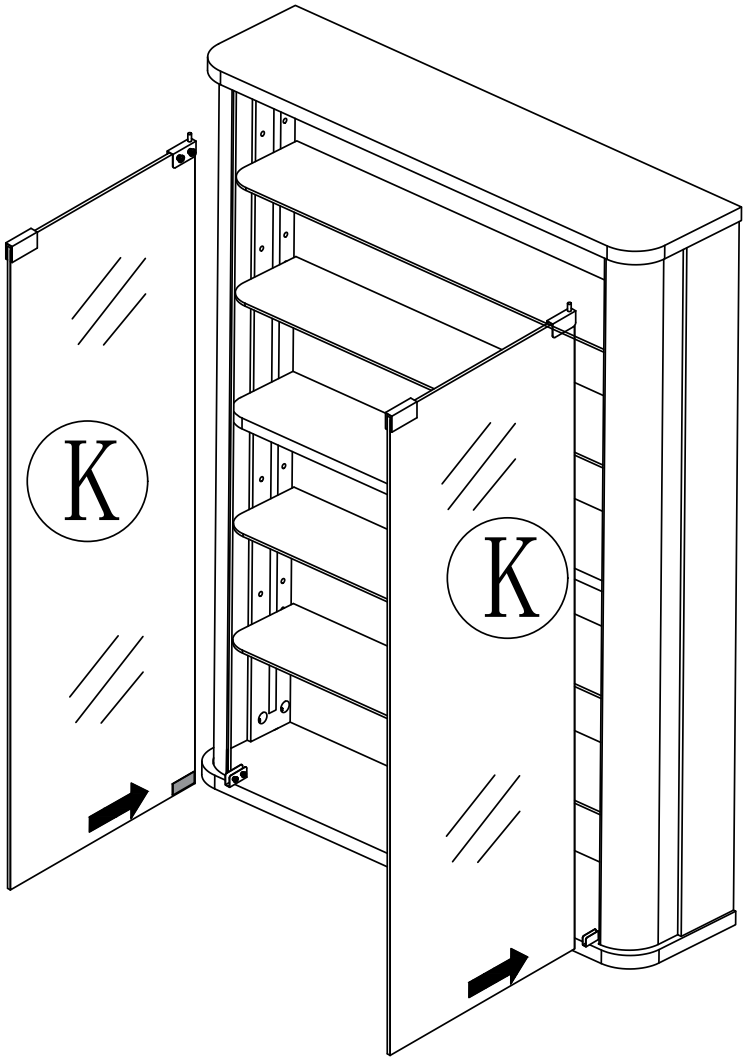


After installing the glass door, place the black gasket on the side where the screws are installed




third

Locking screw

Step 26



x1

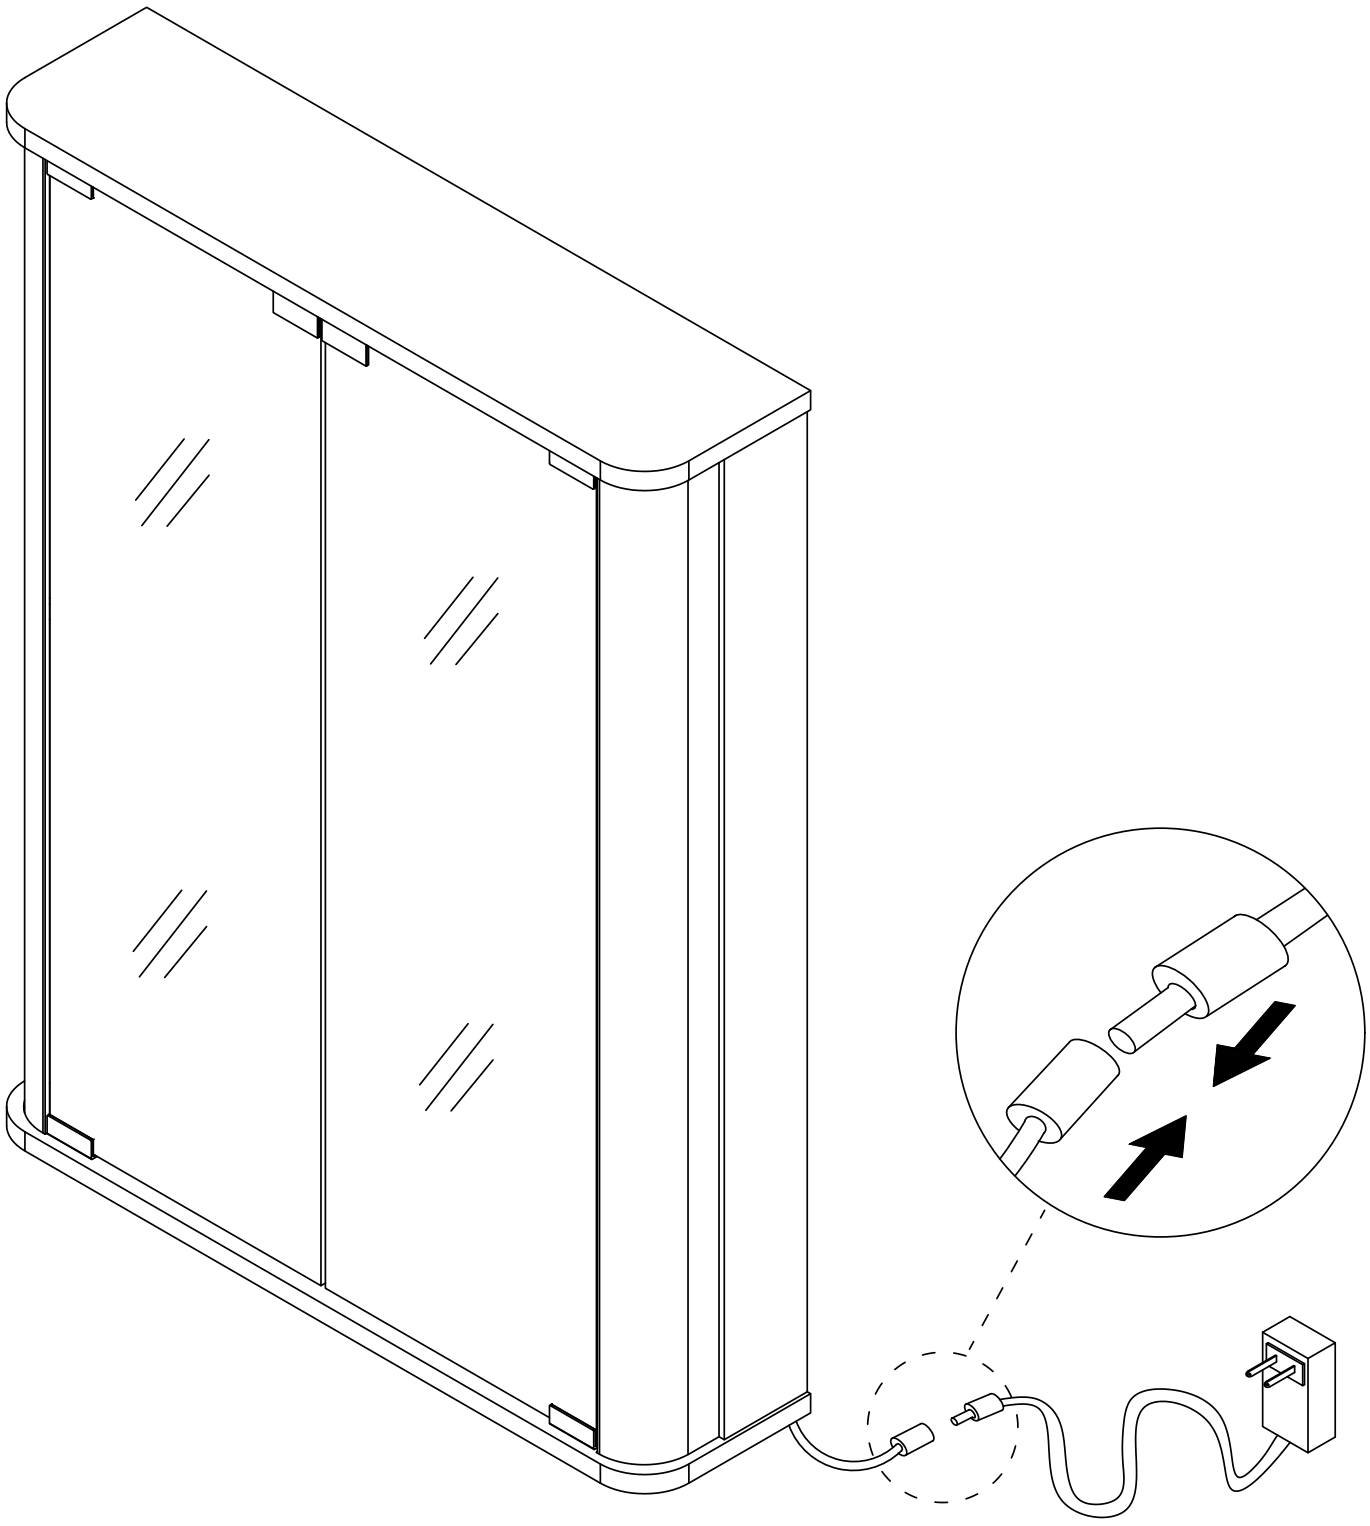


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

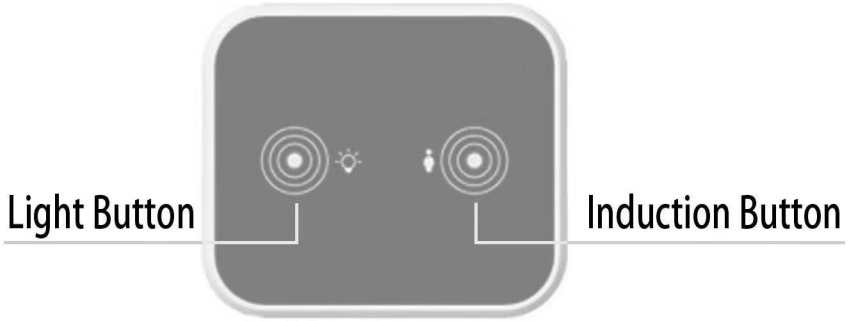

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. **B**. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.