


INTERIOR DOOR ASSEMBLY GUIDE



WARNING

Some steps are more easily handled with two adults.



CAUTION


Before assembly and/or installation, carefully unwrap all parts. Locate and set aside the hardware kit before discarding packaging. Use care when assembling your new product. Take your time and follow assembly instructions closely.




If you have any questions below, please feel free to contact us. We will respond within 24 hours.



ANY DAMAGE



READ INSTRUCTIONS
CAREFULLY




MISS SOME PARTS



OTHER QUESTIONS



20 min

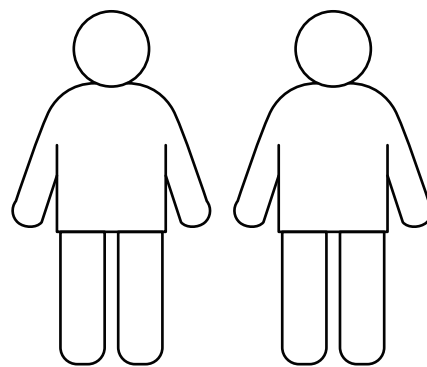

Two People Required

Please retain these instructions for future reference.

- * Wear Safety Goggles.
- * Confirm all parts are present prior to assembly.
- * Assemble on a flat, clean, and soft surface.
- * Professional installation is highly recommend.
- * Two or more people are needed to complete the installation.
- * Do not stand on or use any part of this item as a step ladder.
- * Firmly secure all bolts, screws, and knobs before use.
- * Reconfirm that all bolts, screws, and knobs are secure every 90 days.
- * Fasten screws loosely during initial assembly. Do not firmly tighten the screws until the item is completely assembled.
- * Do not use or store this item in the proximity of open flame or flammable/combustible chemicals.
- * Be aware that some parts are heavy and have sharp edges.
- * If any parts are missing, broken, damaged, or worn, stop using this item until repairs are made and/or factory replacement parts are installed.
- * Do not use this item in a way inconsistent with the manufacturer's instructions as this could void the product warranty.


5T GLASS Door Installation Instruction


5T GLASS Door Assembly Detail		
A	Side Stile	2
T1	Top Rail	1
T2	Middle Rail	2
T3	Middle Rail	2
T4	Bottom Rail	1
C	Tempered glass	5
D	3.93" Carriage Bolts	12
E	Plastic CAP	12
F	Wood Plug	8
G	Hex Key	1

TIPS: For assistance with installation, please contact our customer support team.
We offer several sizes of boards, Let's look at them from different perspectives.

Details of accessories

Stile Side Views

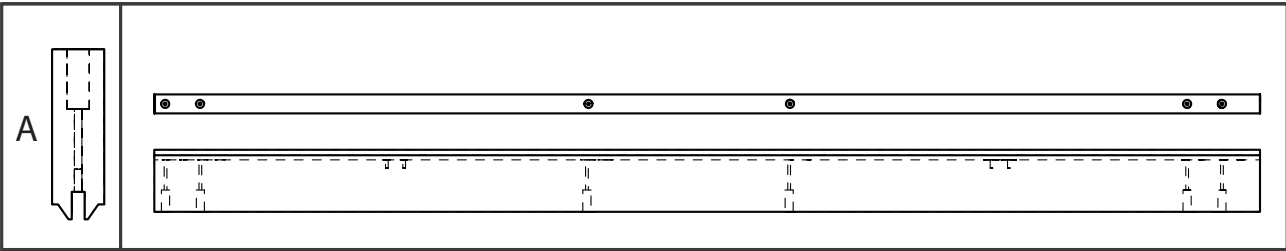


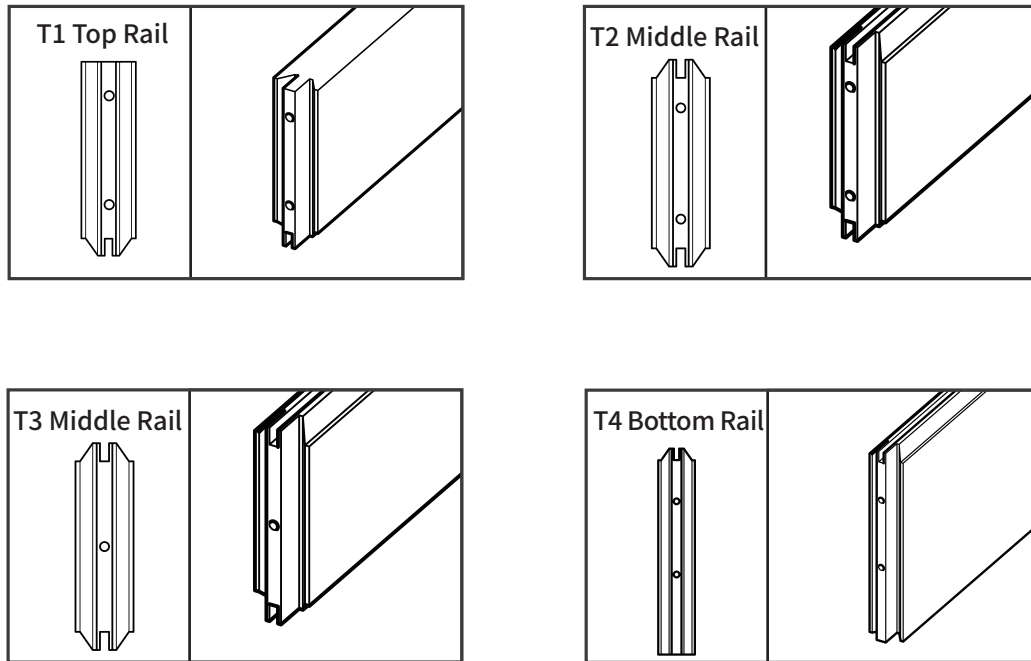

Instructions


Step-1

Place the Left Side Stile (A) on a smooth and clean surface with the groove facing to the right. Get Top Rail (T1), Middle Rail (T3), and Bottom Rail (T4), insert their tongues into the grooves of (A), and align the pre-drilled holes of (A) and pre-installed anchors of (T1/T3/T4). Get 3.93" Carriage Bolts (D), insert into the outside holes of (A), use Hey Key (G) to fasten bolts (D) to the pre-installed anchors in (T1/T3/T4).

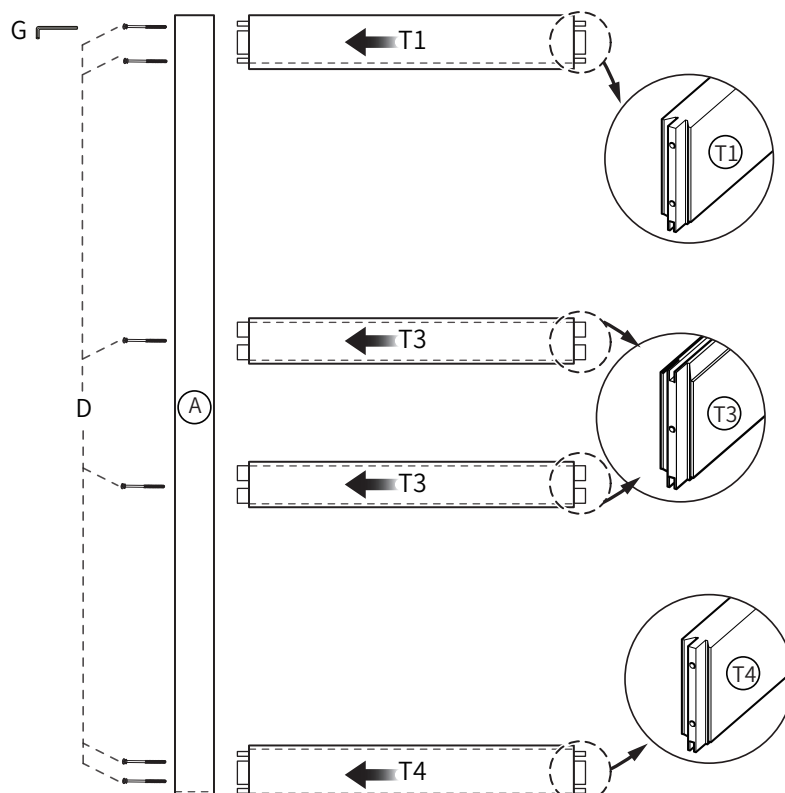


Step-2

Get Middle Rail (T2), insert Wood Plug (F) into the 4 pre-drilled holes on each T2, and then insert the left end into the inside pre-drilled hole on (A).
The pre-drilled holes' location is as indicated in the instruction.

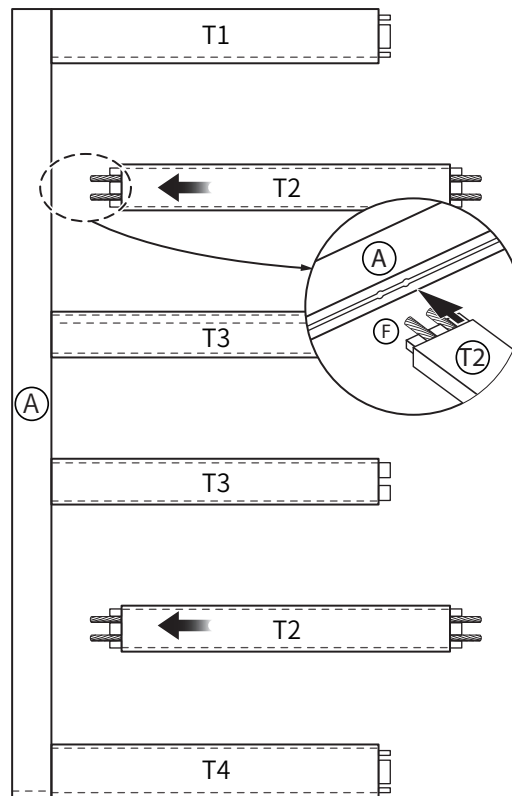


Step-3

Get Glass(C), slide it along the grooves between T, and make sure to insert it into the groove of (A).
Please wear gloves to prevent cuts on your hands.

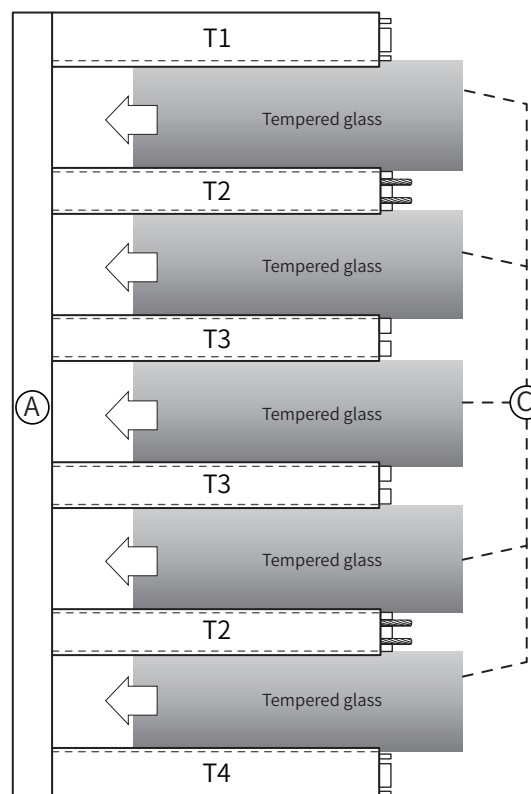


Step-4

Get Right Side Stile (A), make the groove side cover the rail tongues and the edge of the slat then get 3.93" Carriage Bolts (D), insert to the holes on the outside of A, and use Hey Key (G) to fasten bolts (D) to the pre-installed anchors in (T1/T3/T4).

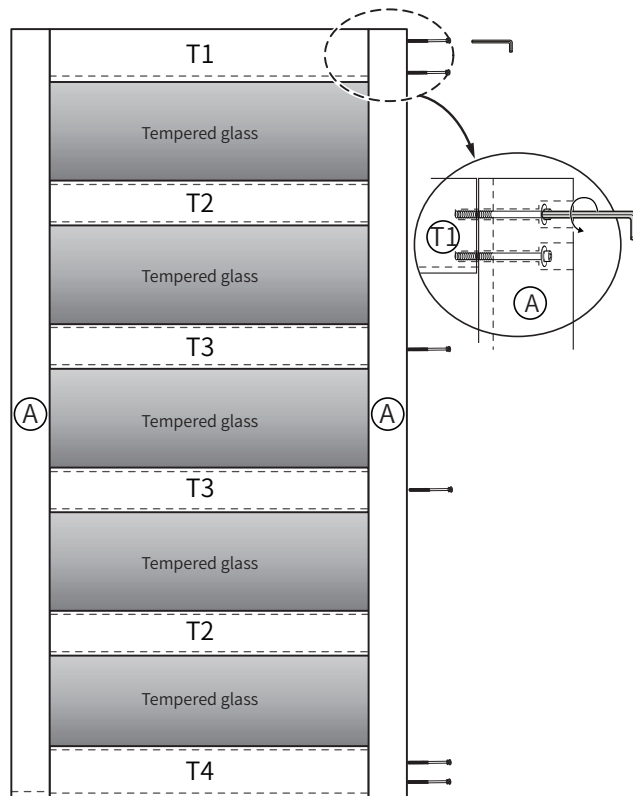

Step-5

Get Plastic CAP (E), insert it into all the holes on the outside of Side Stile A, then the installation of the door is over.

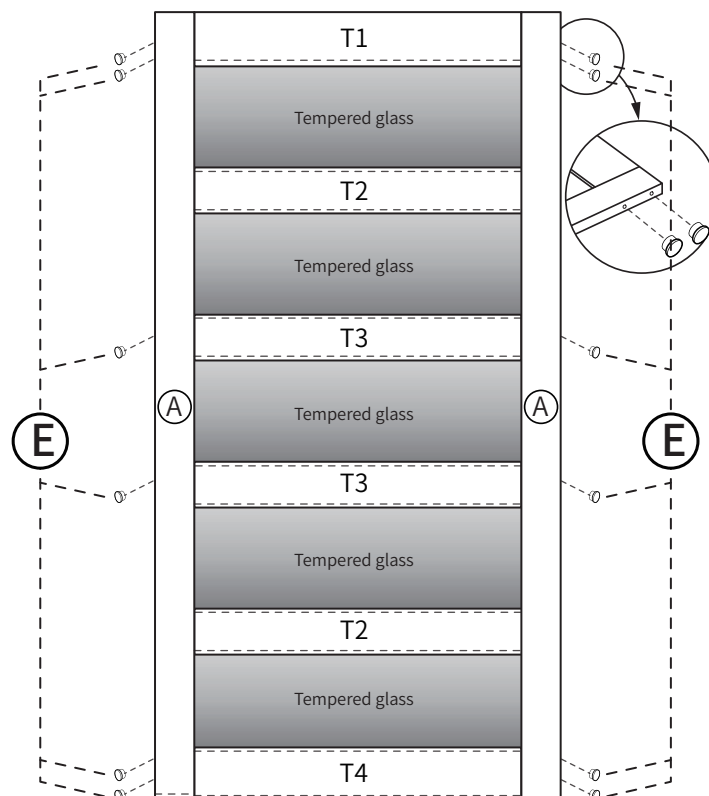

WARNING

Failure to wear proper safety gear (i.e., eye protection) may result injury or death. Always wear proper safety gear before using any power tools.

Improper operation of power tools may result in loss of control, serious injury or death. Always ensure you have complete control of the power tool and the work area is hazard-free before operating any power tools.

Lack of secure clamping of the door may result in unexpected movement of the door, loss of power tool control and serious injury or death. Always securely clamp the door in place before cutting or drilling the door.

Lack of, or improperly installed anti-jump pad may result in the door coming off the track and cause serious injury or death. Installation of anti-jump pads are required for safe operation of this hardware. Installed properly, these anti-jump pads will keep the door securely attached to the track.

CAUTION

Mishandling of heavy objects (i.e., doors) may cause a loss of balance and serious injury. Always be sure to have a secure hold on the object and are balanced before moving the object. Always wear safety shoes when lifting heavy objects.

Getting body parts (i.e., hair, fingers) caught in moving parts may cause pinching and serious injury. Do not put fingers in parts that may move and always remove or contain anything on your body that may become entangled with a moving part.

Closing sliding doors with your hand on the end of the door may result in your hand, or fingers, getting caught between the door and other solid objects (i.e., another door, molding) causing serious injury. Always use the door handle to close doors.

Usage Statement:

Use of excessive force when opening, and closing, the door(s) may result in damage to the hardware. Always hold the handle and gently open and close the door(s) .

Warranty Statement:

1 year straight unconditional warranty service enables every single hardware's durability coverage during its life time.

Warranty


Our products come with a 1 year warranty from the date of purchase.
In any event that the product arrives damaged or missing parts,
we are more than happy to provide you with replacement part(s).
Register your product on our website to enjoy extended warranty!!

Easy Return


We work hard to make sure order arrives safe and secure, but rest assured
we will take care of it if it is not up to standard. If you need replacement parts,
Contact us we will send you replacements with no hassle.



Contact Us



Replacement



You

You don't have to worry about re-packaging / schedule pick-up.