

INSTALLATION GUIDE

First of all, make sure that all parts are present.

STEP 1 Screw **DD** and **EE** tight by spinning **EE**.

STEP 2 Install each part of **DD**.

STEP 3 Snap the **BB** part into the **AA** part, attach one edge of the velcro to another.

STEP 4 Tighten the lampshade with the **CC** part, then install the **bulb** in.


USING TIPS

Plug in the power first, then pull down the chain and use remote to turn on/off the lamp or adjust the lightness.

TROUBLE SHOOTING


1. If the lamp doesn't work after power on, please reinstall the bulb and pull the chain again.
2. If the lamp shade is unstable, please make sure the CC part has been tighten.
3. If the lamp is shaking or tilting, please recheck STEP2&STEP4 to make sure all parts have been tightened.

REMOTE CONTROL FUNCTION

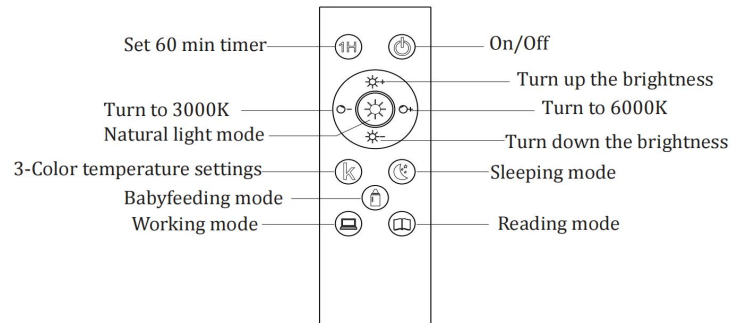

TROUBLE SHOOTING

- 1.If your lamp does not work,please make sure that plug is firmly in and 2 batteries were installed in the remote, then Pull down the chain and press the ON/OFF button on the remote control to turn on.
- 2.If the remote can not control the bulb, please try to reconnect remote to the bulb as following step:
After the bulb turn on,long press the remote's on/off button within 3 seconds until the bulb flashes

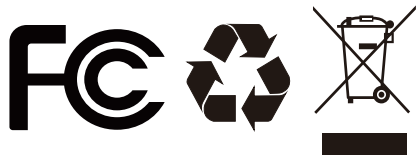

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

USER GUIDE

