



Installation


To avoid scratches and swallowing parts, please do not install by children!

Hardware List		Hardware List	
	Seat	1	
	Armrest	1	
	Back cushion	1	
	Inserted rod	4	
	8x50mm screws	4	
	Backrest	1	
	Seat cushion	1	
	Sofa cover	1	
	Legs	2	
	Connecting buckle x1 8x20mm screws x2		


- 1** As shown in the figure: Insert the rod into the corresponding positions of the backrest and armrest.

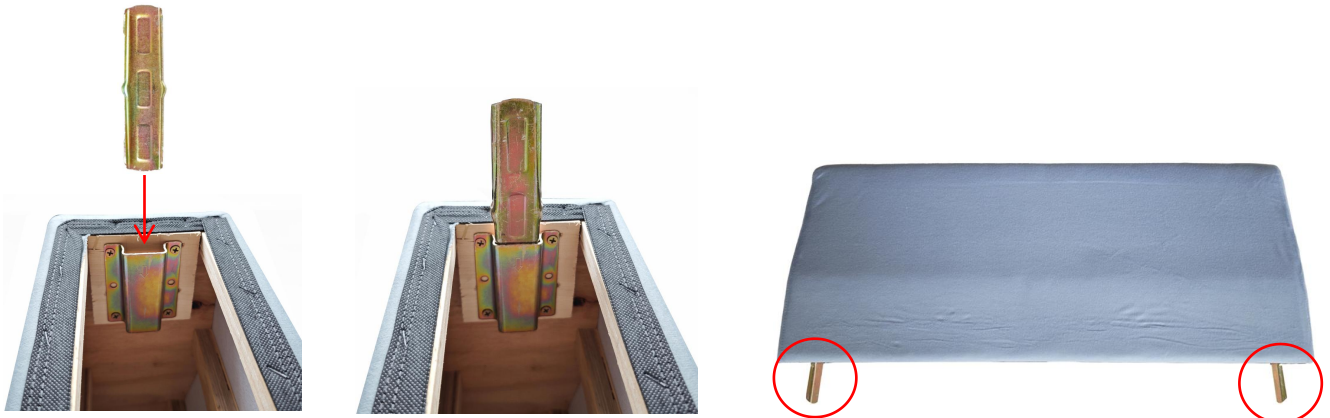


- 2**
- Armrest** **Backrest**
- Make sure to distinguish between the front and back of the backrest. The backrest should be level with the frame on the back side.

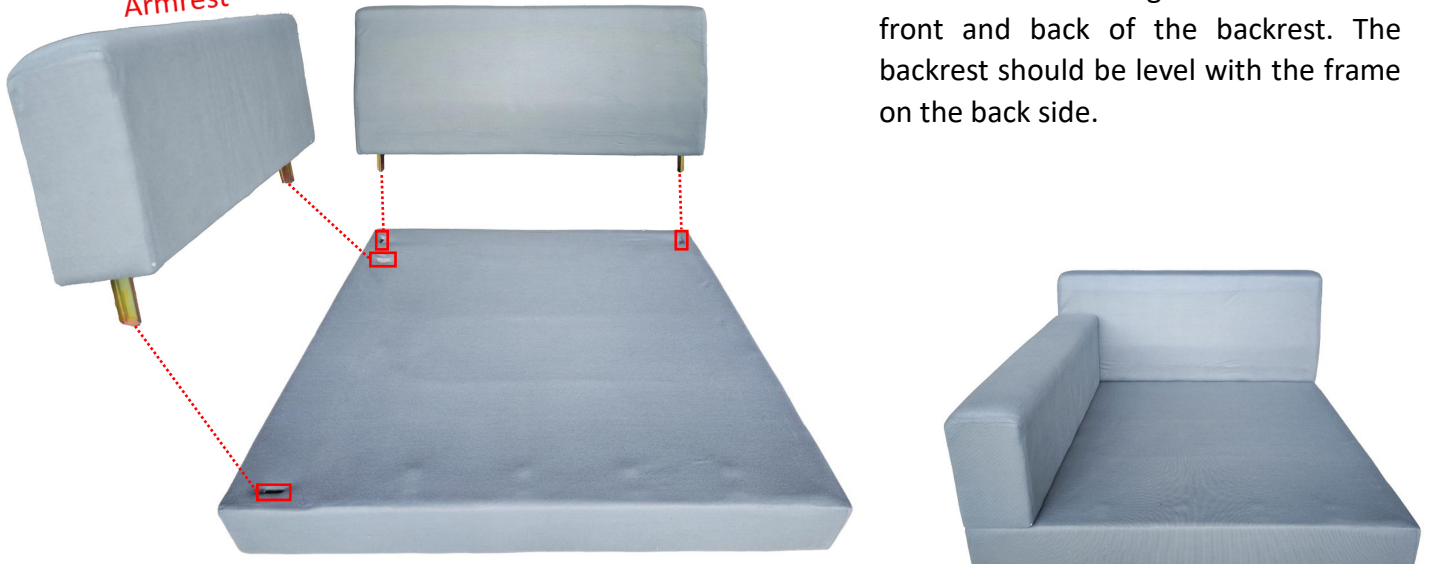


- 3** Put on the sofa cover.
Suggestion: you'd better not remove the protective strip before finish putting the cover on.

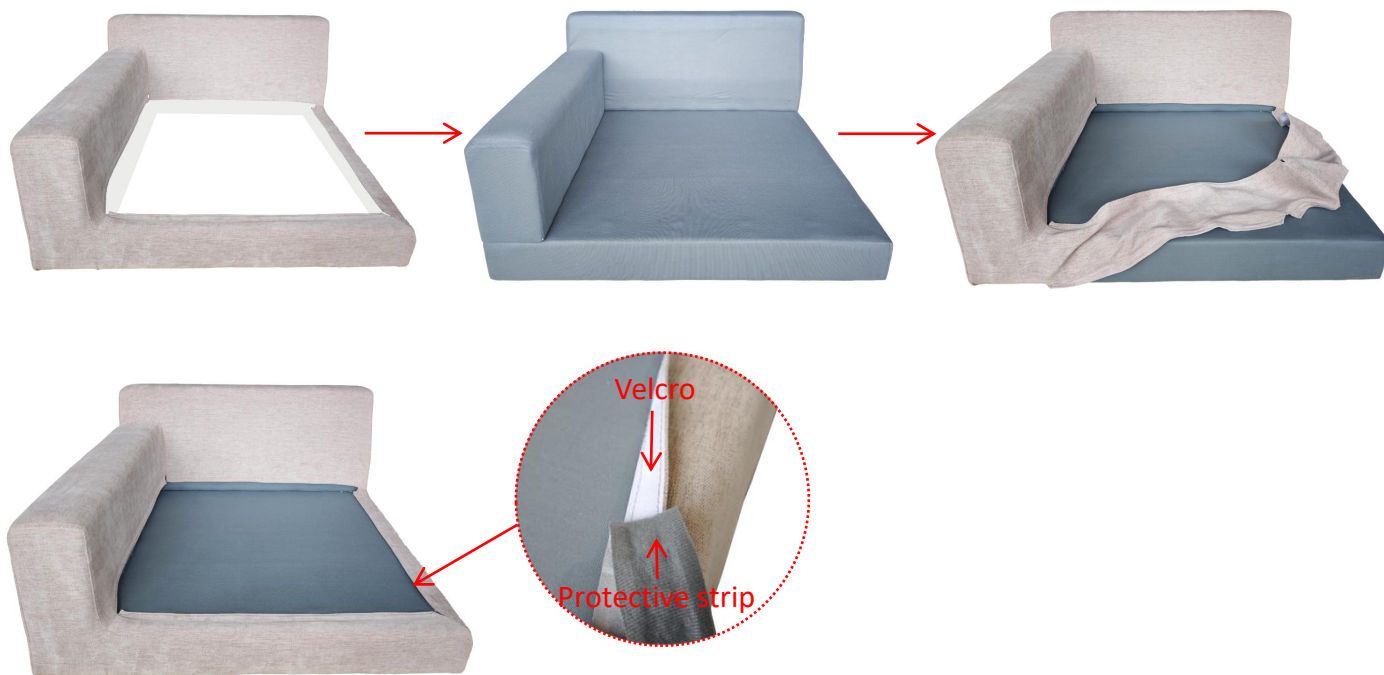


- 4** Install the base frame of the sofa. When inserting the mortise and tenon joints, insert the rounded end first.

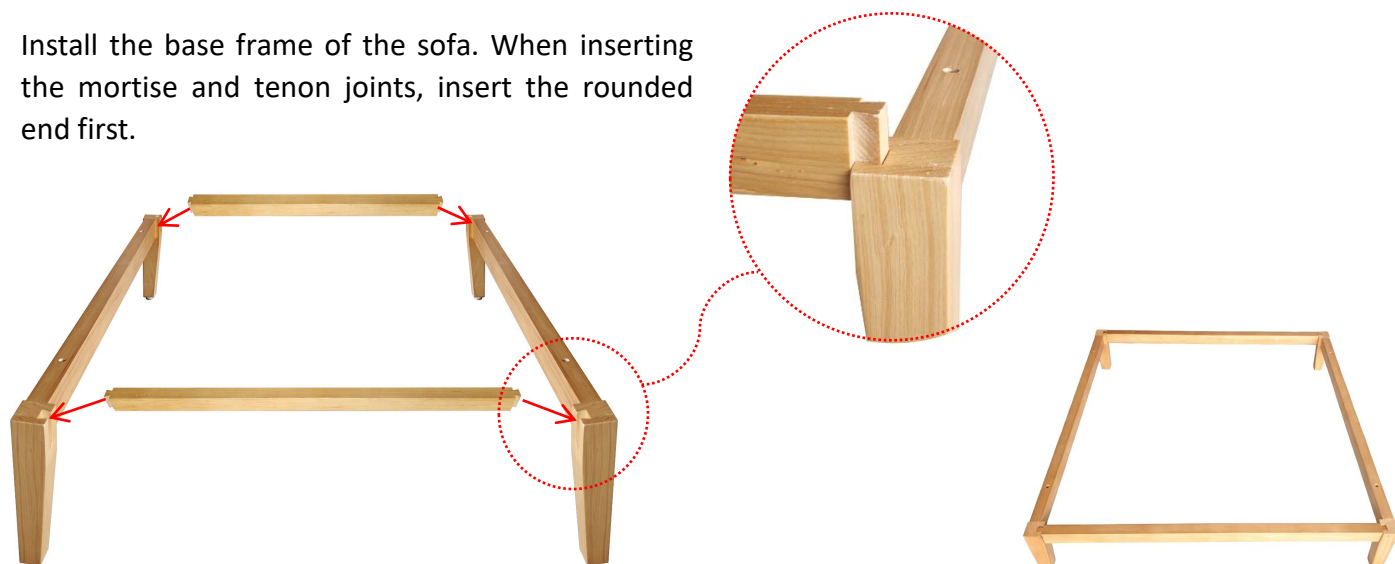

- 5** According to the four circles marked in the diagram, align the screw holes of the underframe with those of the seat frame, and tighten them with 8x50mm screws. (Please don't tighten the screws completely at the beginning. Wait until all four screws can be fully inserted and fixed before doing so.)

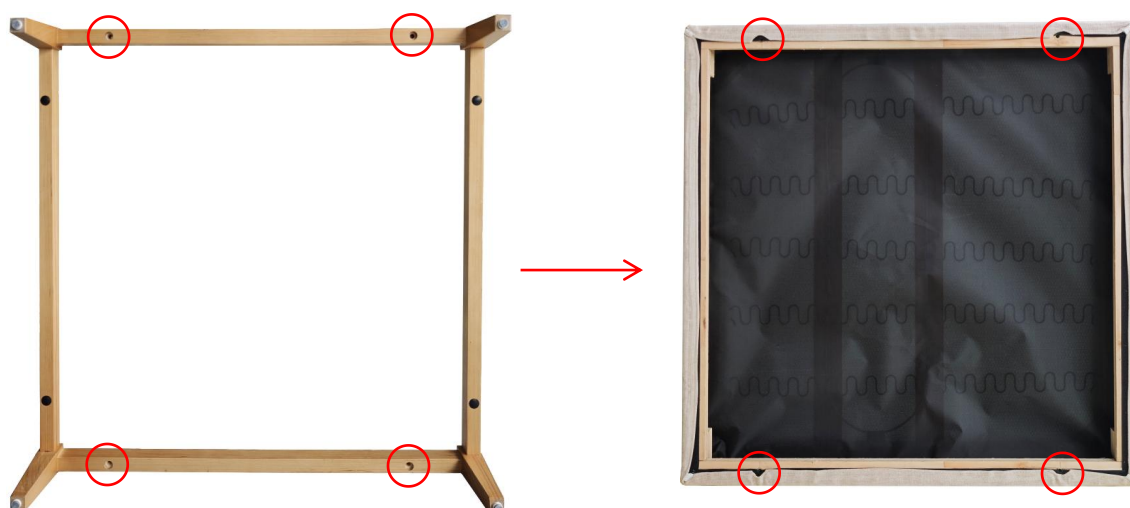

5

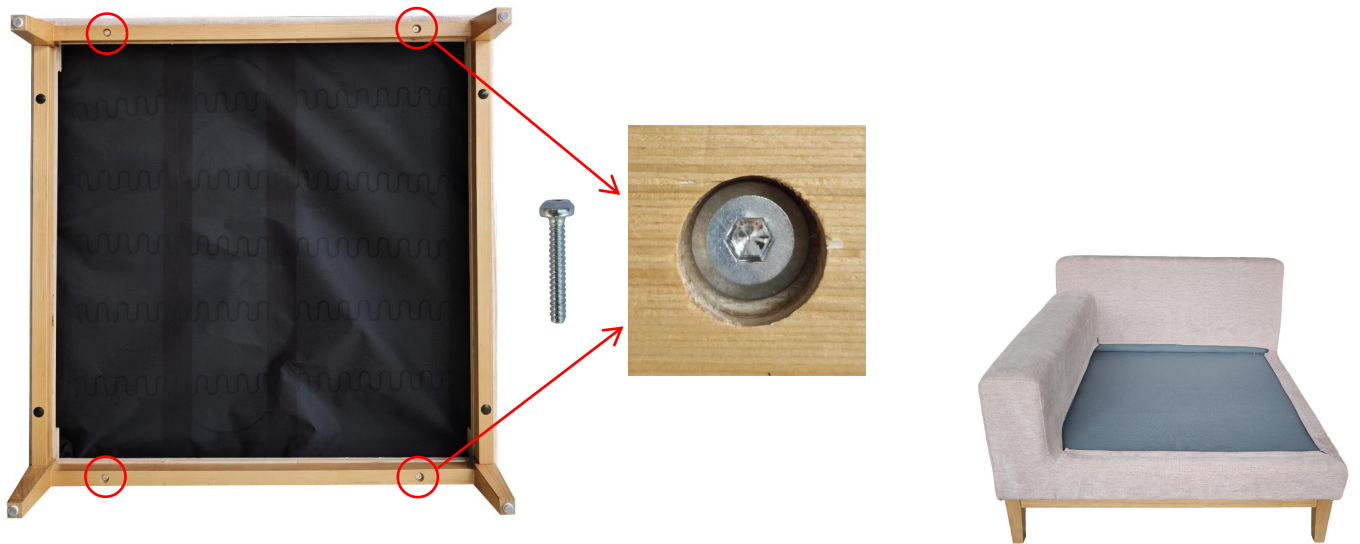

6 Place the seat cushion and back cushion. Note: Place the side with the zipper facing backward.



7 Apply the connection buckles to connect the seats together (or not, it's totally up to users).

