

# Installation Instructions

## List of accessories

### ① Installation Tools



Hexagonal wrench\*1 Open-end wrench\*1



Screws\*8



Long screw\*2



Short screw \*4



Cover mother \*12



Hook \*4




Length fixing screw \*3



Adjustable foot \*4

### ② Main parts

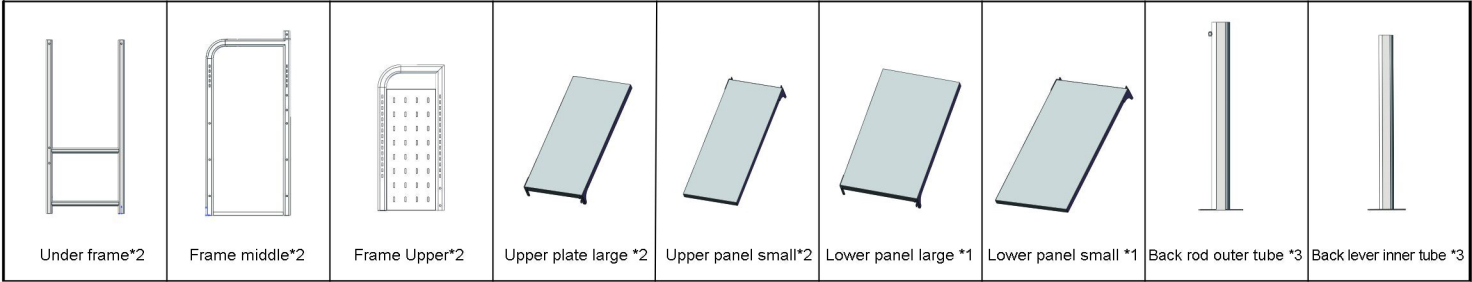

Under frame\*2

Frame middle\*2

Frame Upper\*2

Upper plate large \*2

Upper panel small\*2

Lower panel large \*1

Lower panel small \*1

Back rod outer tube \*3

Back lever inner tube \*3


## Installation Diagram



1: Attach the adjustable feet to the lower frame, fix the back lever with short screws and assemble the lower frame. (Note that there is a difference between left and right side of the frame, and the shrapnel side is facing inwards.)




2: Press the shrapnel of the lower frame and connect it with the middle frame by matching the holes, fix the back lever with screws and assemble the frame. (Note that there is a difference between left and right side of the frame, and one side of the bar hole is facing inwards.)

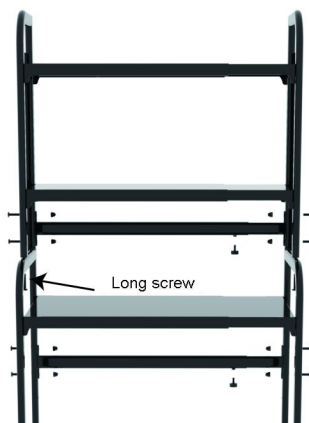

3: Connect the top frame with the middle frame by matching the holes, fix the back bar with screws and assemble the frame. (Note that there is a difference between left and right side of the frame, and one side of the bar holes is facing inwards.)



4: After adjusting the length of the frame, screw the length fixing screws to the inner tube of the tie rod without sliding, and then install the adjustable lower and upper plates, and finally adjust the adjustable feet to make the whole frame balanced.

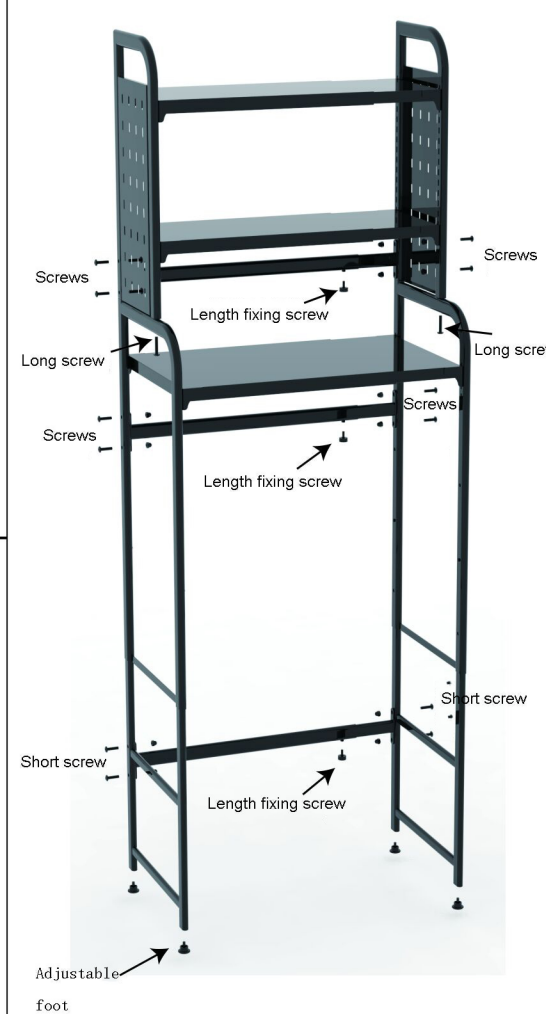

Screw position