
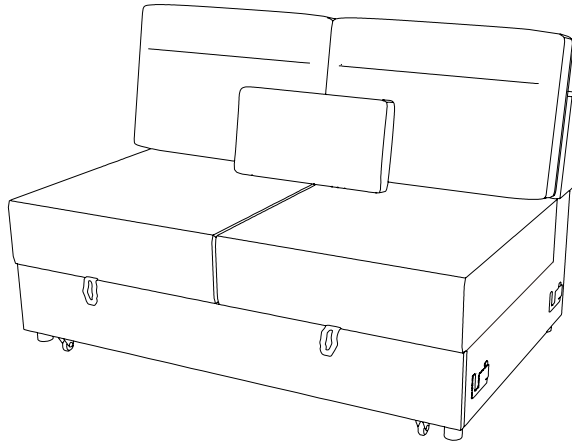




ASSEMBLY INSTRUCTION


ITEM NO.:D79391.92.95-LS



PARTS LIST


				
x1	x1	x2	x2	x1

HARDWARE LIST


			
1	2	3	4
x4	x4	1/4x16mm x8	M4*40mm*100mm x1
			
5			
x4			

BEFORE ASSEMBLY

1.Please open the seat frame before removing the parts for assembly.

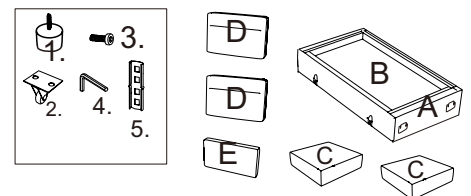


2.After removing the cushion from the compress bag, please allow air to flow through the cushion for few days. You can try to fluff cushion by push in and push out on all four sides of the cushion. Hitting the top/front of the cushion with your hand to fluff them after installation.

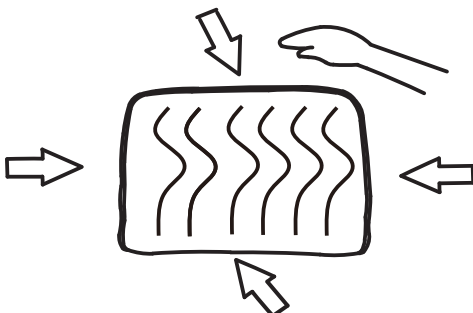


3.Please allow at least 72 hours for the cushions to recover to its natural state after removing from the package.


Step1

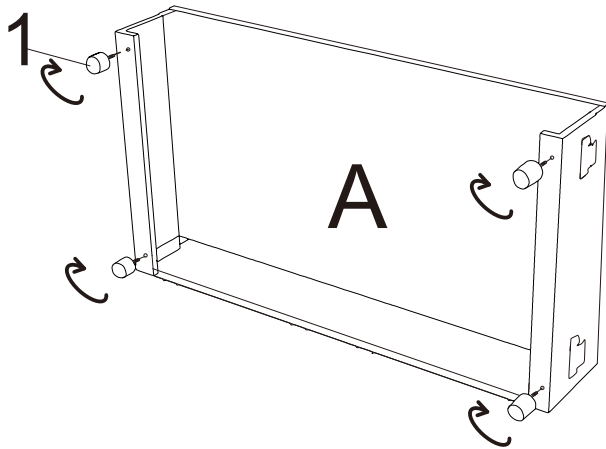


Step2

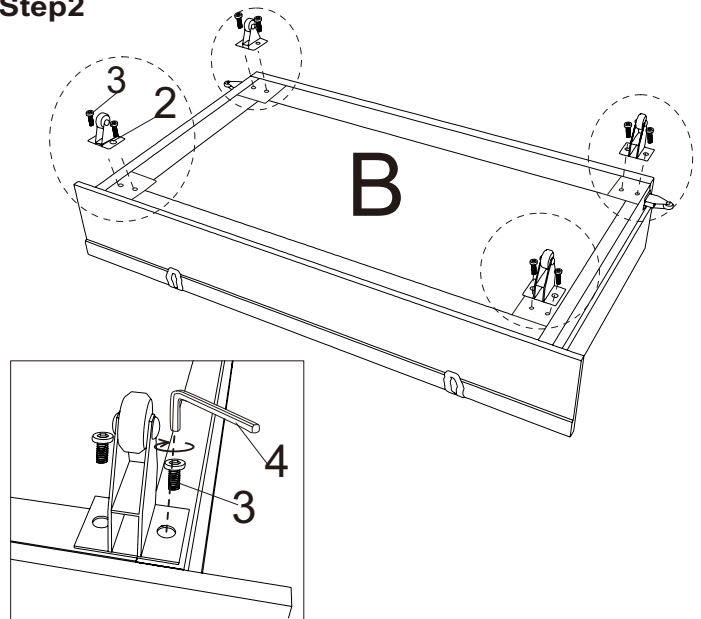


Step3

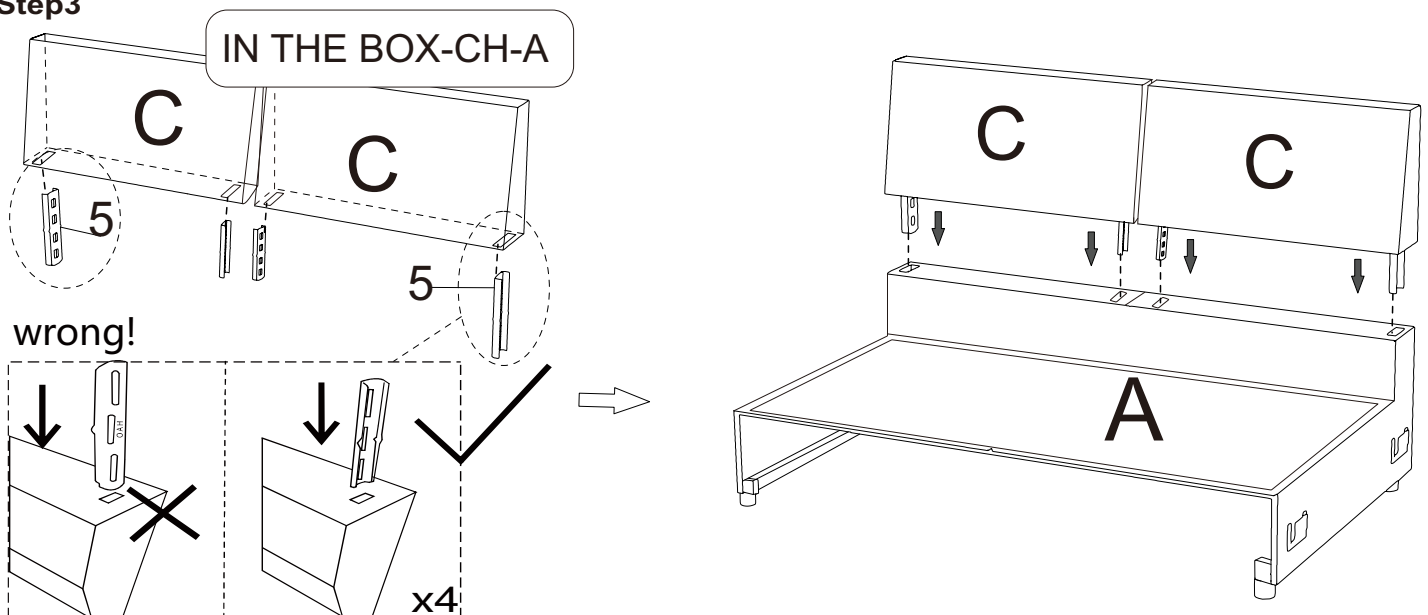


Step5

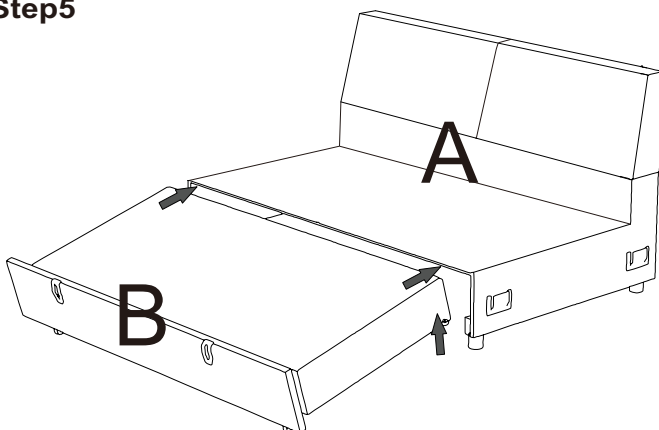

Step6

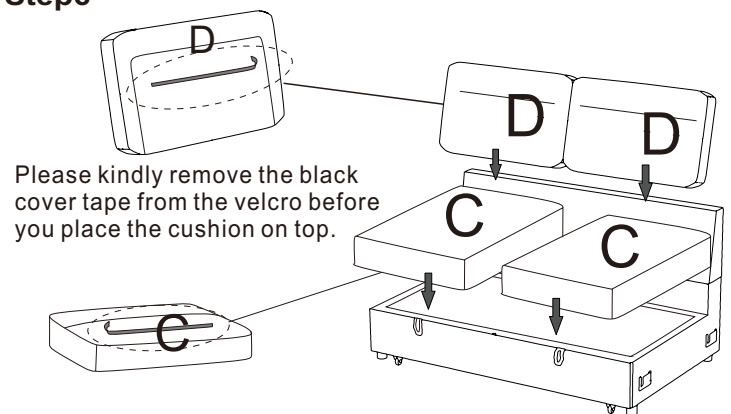

Step7

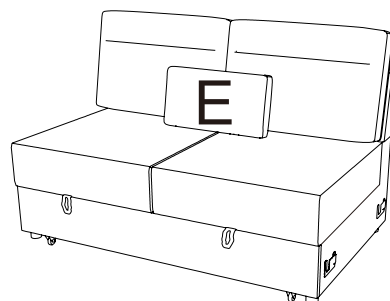

Step8

