



Shift®+ | K-21335

Round two-function handshower, 2.5 gpm

Features:

- Advanced spray engine provides two spray experiences: full coverage and targeted massage
- Full coverage spray produces an encompassing spray ideal for everyday use
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Intuitive and easy push-button activation to switch between two sprays
- Ergonomic design is comfortable and easy to grip
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.5 gpm (9.5 lpm) maximum flow rate
- Contains flow-regulating check valve for backflow prevention



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:20 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

OBC compliant when installed to the specific requirements of these regulations.

OBC

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
OBC

Technical Information

All product dimensions are nominal.

Flow Rate

Handshower Rated Maximum 2.5 gpm (9.5 l/min)

Flow:

Material

- KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories

- K-8593 72" metal shower hose

or

- K-9514 60" metal shower hose
-

Warranty


See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:20 - US-CA

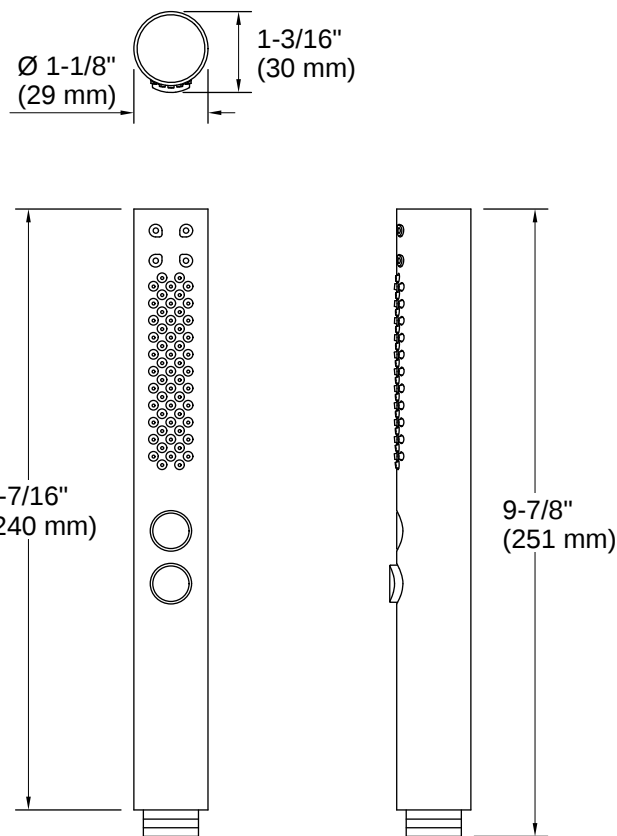

Installation

- Bracket or sidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 2.2 gal/min (8.3 l/min) or less.

Plumbing codes may require that a vacuum breaker be installed in-line to handshowers. Please consult local plumbing codes.

OBC compliant when installed to the specific requirements of these regulations.

