

INSTALLATION INSTRUCTION

Endurance Wall Pack

WARNING

IMPORTANT: NEVER attempt to do any work without shutting off the electricity.

1. Read all instructions before installing.
2. System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
3. Place the wall switch in the "OFF" position.
4. Go to the main fuse box, or circuit breaker. Unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the space that you are working on.

CAUTION

- All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn out or broken. Failure to follow this instruction may invalidate the ETL/cETL listing of this fixture.

AVERTISSEMENT

IMPORTANT : Coupez l'électricité avant TOUTE manipulation.

- Lisez toutes les instructions avant d'installer.
- Système est destiné à être installé par un électricien qualifié en conformité avec le code national de l'électricité et les règlements locaux.
- Placez l'interrupteur mural en position d'arrêt (« OFF »).
- Toujours mettre le fusible ou le disjoncteur en position arrêt dans la pièce ou des travaux électriques sont prévus

MISE EN GARDE

- Toutes les pièces doivent être utilisées tel qu'il est indiqué dans ces instructions. Ne remplacez pas les pièces, n'en laissez pas de côté et ne les utilisez pas si elles sont usées ou brisées. Le non-respect de ces instructions peut annuler l'homologation ETL/cETL du luminaire.

ADVERTENCIA

IMPORTANTE: NUNCA intente hacer trabajos sin desconectar el suministro eléctrico.

- Lea y comprenda todas las instrucciones e ilustraciones por completo antes de proceder con el ensamblaje e instalación de esta lámpara.
- Sistema está diseñado para ser instalado por un electricista calificado, de acuerdo con el código eléctrico nacional y las normas locales.
- Coloque el interruptor de la pared en la posición "OFF" (APAGADO).
- Diríjase a la caja de fusibles o a la caja del interruptor de circuito principal en su hogar. Coloque el interruptor de alimentación principal en la posición "OFF" (APAGADO).

PRECAUCIÓN

- Todas las piezas deben usarse como lo indican estas instrucciones. No reemplace las piezas, no omita piezas durante la instalación ni utilice piezas gastadas o rotas. El incumplimiento de esta indicación podría invalidar la calificación ETL/cETL esta lámpara.



Wire connector
Qty: 3pcs



Junction box screw
Qty: 2pcs + 1 extra



Assembly screw with gasket
Qty: 2pcs + 1 extra

INSTALLATION INSTRUCTION

Endurance Wall Pack

FOR RECESSED JUNCTION BOX

STEP 1:

- Mount back plate and gasket to existing junction box with junction box screws (B1) loosely, then tighten the screws.

STEP 2:

- Remove conduit and keyhole caps as needed.
- Wrap locking nut with tread seal tape to act as a sealant.
- Mount fixture housing onto square canopy plate.
- Tighten locking nut to secure fixture position.

STEP 3:





- Hang fixture housing canopy plate onto back using hanging cable.
- Connect the electrical wires as shown in **Fig. 1**, making sure that all wire connectors (A1) are secured. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. After wires are connected, tuck them carefully inside the junction box.

Fig.1 Wiring

	Fixture Wires Black or Smooth	House Wires Black (Hot)
	Fixture Wires White or Ribbed	House Wires White (Neutral)
	Fixture Wires Bare wire (Ground)	House Wires Green or Bare Copper (Ground)

STEP 4:

- Mount fixture housing and canopy onto back plate with assembly screws with gasket (B2).
- Tighten all conduit caps with thread seal tape.

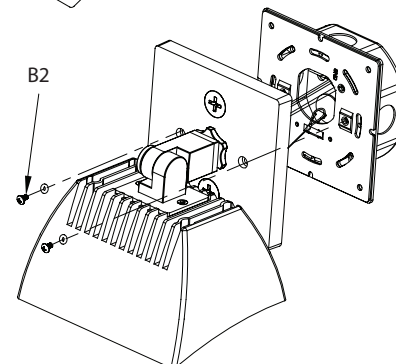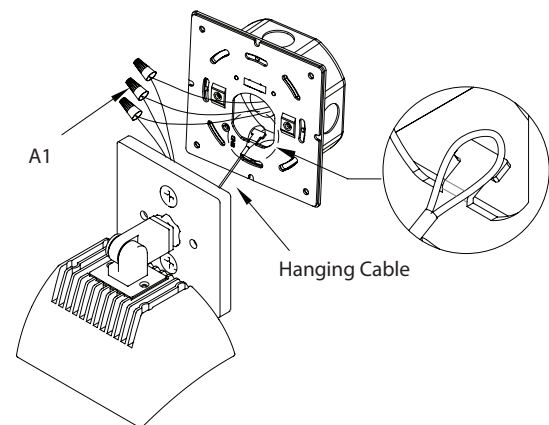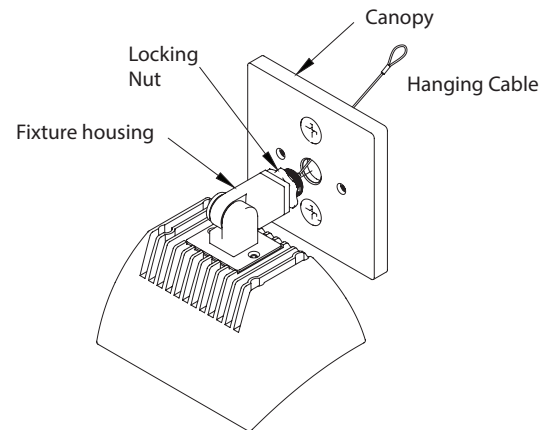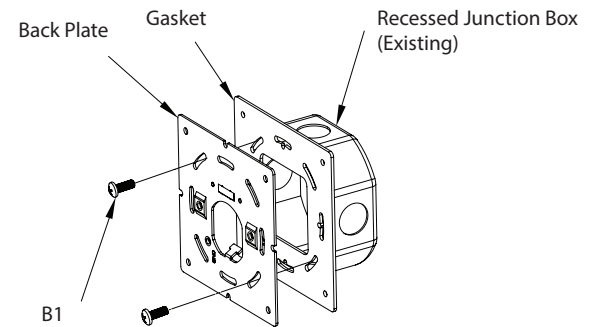

INSTALLATION INSTRUCTION

Endurance Wall Pack

FOR EXPOSED JUNCTION BOX

STEP 1:

- Remove conduit caps as needed.
- Wrap locking nut with thread seal tape to act as a sealant.
- Mount fixture housing onto round canopy plate.
- Tighten locking nut to secure fixture position.

STEP 2:

- Connect the electrical wires as shown in **Fig. 1**, making sure that all wire connectors (A1) are secured. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. After wires are connected, tuck them carefully inside the junction box.



Fig.1 Wiring



Fixture Wires	House Wires
Black or Smooth	Black (Hot)
Fixture Wires	House Wires
White or Ribbed	White (Neutral)
Fixture Wires	House Wires
Bare wire (Ground)	Green or Bare Copper (Ground)

STEP 3:

- Mount fixture housing onto Junction Box with junction box screws (B1).
- Tighten all conduit caps with thread seal tape.

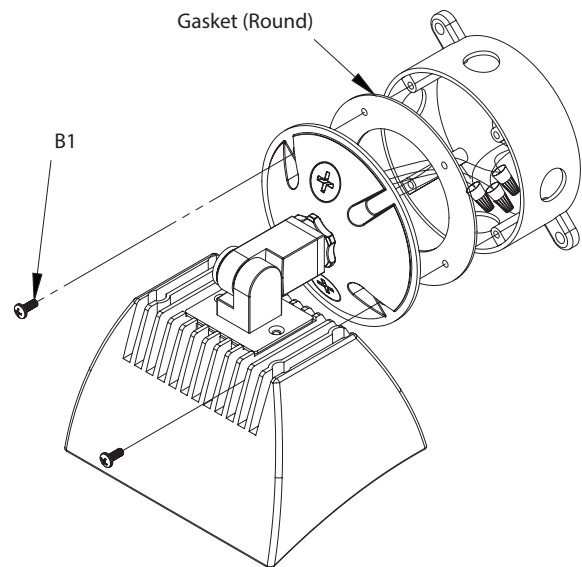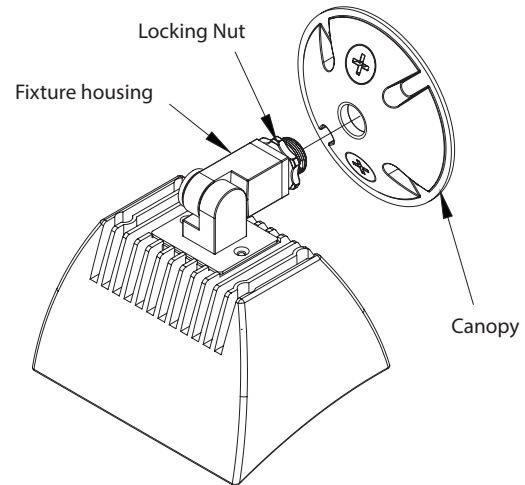


INSTALLATION INSTRUCTION

Endurance Wall Pack

ADJUSTING THE LUMINAIRE

- **Vertical Adjustment:** Loosen thumb screw, rotate fixture to desired angle ($\pm 90^\circ$), and tighten thumb screw.
- **Rotation Adjustment:** Loosen locking nut, rotate fixture to desired angle (360°), and tighten locking nut.

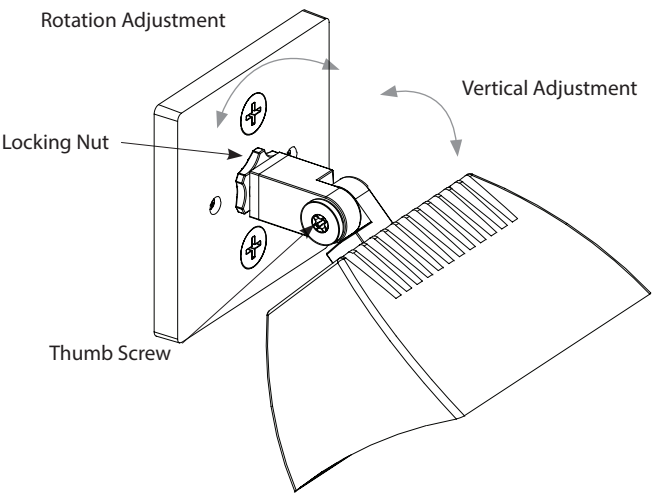

COMPLETING THE INSTALLATION:

To prevent moisture from entering the outlet box and causing a short, use caulking (i.e. silicone sealant) to outline the outside of Flood junction box where it meets the wall while leaving the bottom side unsealed to allow moisture to escape.

Note: Flood is suitable for wet location installations in all mounting orientations.

COMPATIBLE DIMMERS

BRAND	MODEL NUMBER	TYPE
		ELV 120V
		ELV 120V
		ELV 120V
		ELV 120V