


ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0331 / H0332

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save this instruction.


Hardware Package (included):

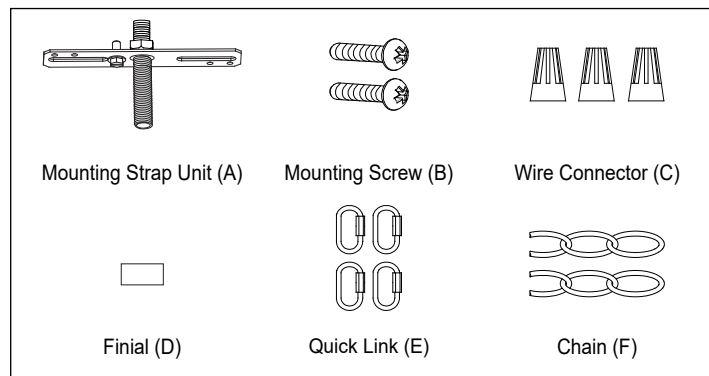

Installation Steps

Turn off the power at fuse or circuit box.

1. Attach the mounting strap unit (A) to the outlet box by using two mounting screws (B). Adjust the length of the preinstalled threaded pipe if necessary.
2. Attach the tube-a to the threaded pipe of the bottom frame, put the post through the tube-a, repeat for other three sides. Assemble the fixture to four posts and secure it with four set screws.
3. Attach the tubes to the fixture.
4. Choose the length of the chains (F) you need, use pliers (not included) to open and remove links to shorten the chains (F), then weave the fixture wire and the fixture ground wire through the chain (F) and canopy kit.
5. Connect one end of two chains (F) to the loops by using quick links (E).
6. Connect the other end of two chains (F) to the top loops of canopy kit by using quick links (E).
7. Hang the steel cable onto the mounting plate unit (A).
8. Make wire connections using wire connectors (C):
 - The smooth wire (marked) from fixture to the black wire from power source.
 - The ridged wire (unmarked) from fixture to the white wire from power source.
 - Attach the fixture ground wire to the mounting strap unit (A) with the green ground screw, then connect it to the house ground wire with the wire connector (C).
 Carefully tuck wires back into the outlet box.
9. Attach the canopy kit to the mounting strap unit (A) by inserting the threaded pipe, then secure it by finial (D).

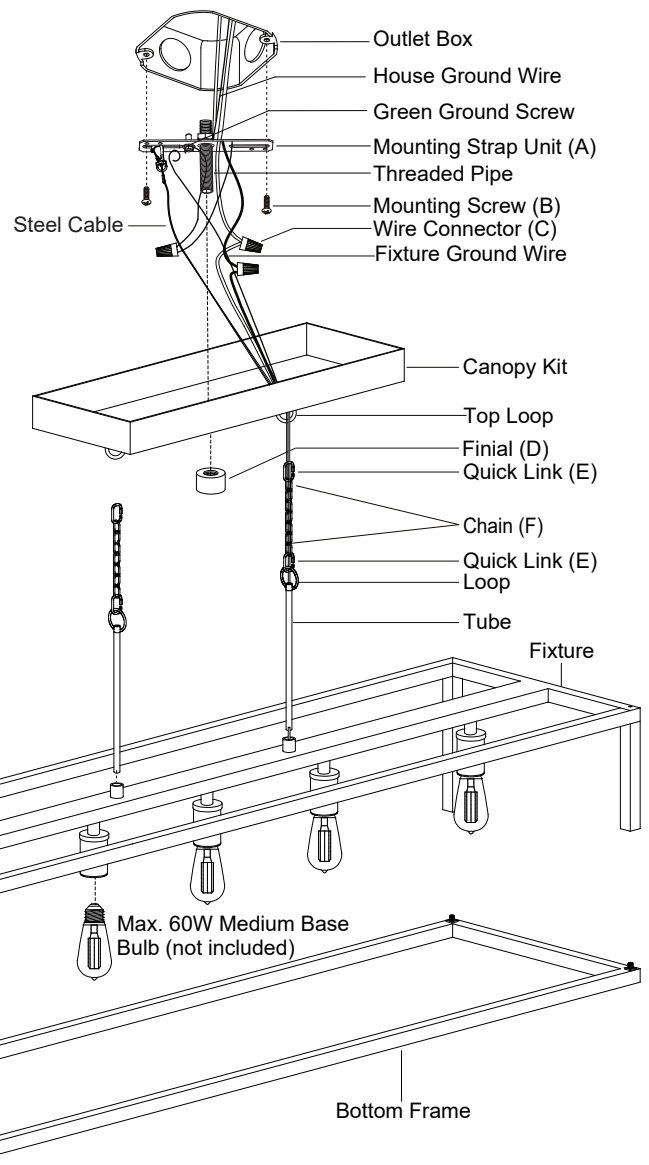



10. Install 5 x 60W Max. medium base bulbs (not included) .

See relamping label at socket area or packaging for maximum wattage allowed.

Turn on the power at fuse or circuit box.

The following parts are available for reorder if damaged or missing.

Spare Parts List:

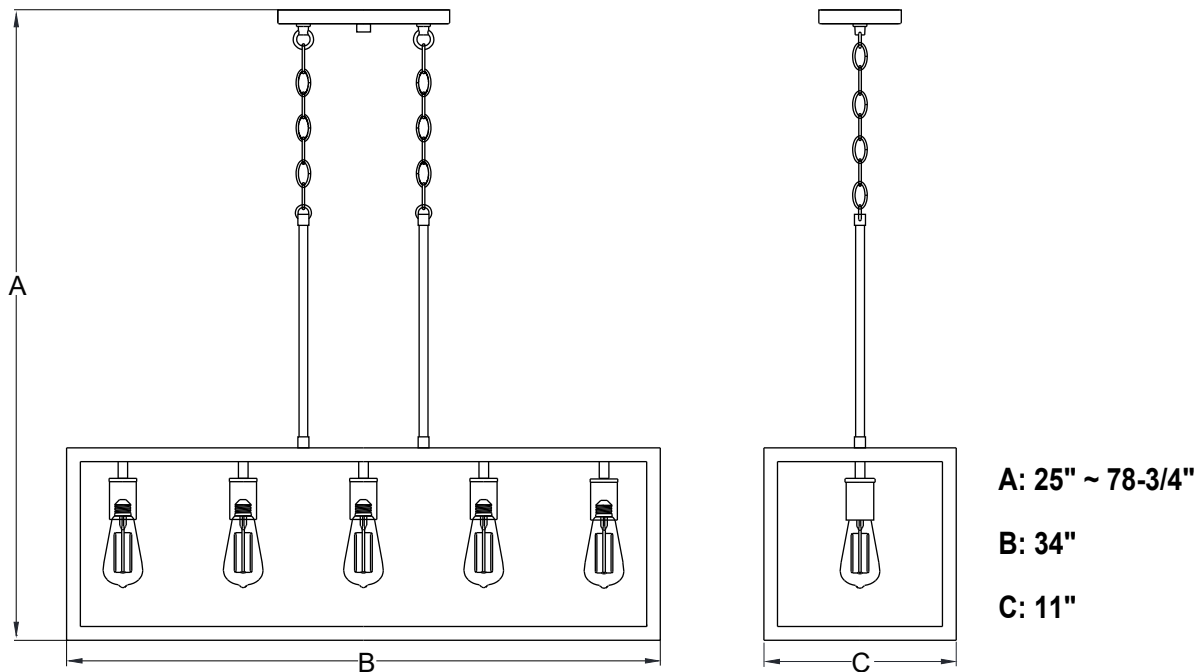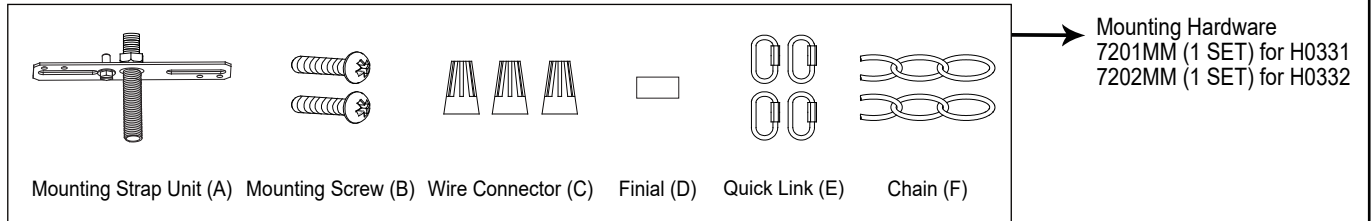

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?

info@vaxcel.com
1-800-482-9235