





EBELL X-GRANDE FLUSH MOUNT

KWFM31827

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

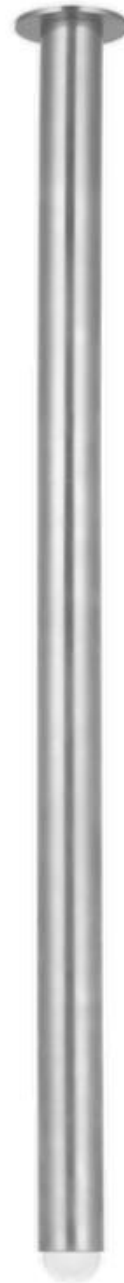

FIXTURE PARTS

- A. Junction box
- B. Mounting Plate
- C. Mounting Screws
(Anchors – Not Pictured)
- D. Wire Nuts
- E. Driver
- F. Fixture Base
- G. Fixture Screws
- H. Stem/LED Assembly
- I. Fixture Cover
- J. Diffuser

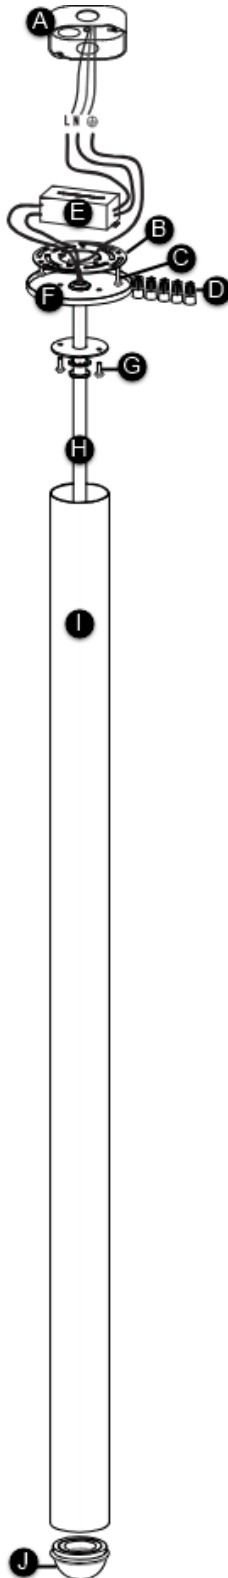

INSTRUCTIONS

I. Preparing for Installation

1. Place the mounting plate against the ceiling mounting location and mark the anchor locations through the holes on the mounting plate, then remove the mounting plate from the ceiling.
2. Drill appropriately sized holes at the marked locations and install the anchors.
3. Affix the mounting plate to the ceiling by screwing the #8-32 screws provided anchor screws into the anchors.
4. Assemble the cover to the stem/LED assembly and attach it to the fixture base using the fixture screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-) fixture wire to the negative (-) output driver wire (negative to negative)
 - b) Positive (+) fixture wire to the positive (+) output driver wire (positive to positive)
 - c) Hot driver input wire (black) and hot power line wire from the junction box (hot to hot)
 - d) Neutral driver input wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not using a dimmer.
5. Carefully tuck the driver and all the wires into the junction box, if the fixture requires it.

III. Installing the Fixture

1. Slide the canopy onto the mounting plate and secure it in place with the screws provided.
2. Screw in the diffuser to finish.