

KITCHEN CEILING INSTALLATION



Before installing the ceiling, please wear gloves, protect your hands and avoid leaving fingerprints on the ceiling during installation.



First, use screw or sealant to install the L angle on the surrounding walls at the place 1.18 inch away from the roof.




Then, install the carrier① on the top with screws, and the center of the carrier is 12 inch away from the wall.



Place one edge of the ceiling panel on the L angle, and clip the other edge into the carrier ①.




Continue to install the first row of carriers, and repeat steps 3 and 4 until the entire row of ceiling is installed.

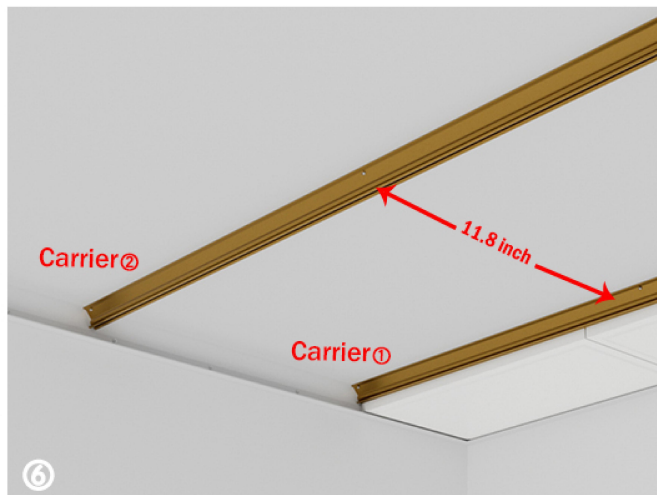

Then, install the second row of carrier② with screw 11.8 inch away from the carrier① (Center to Center).

KITCHEN CEILING INSTALLATION

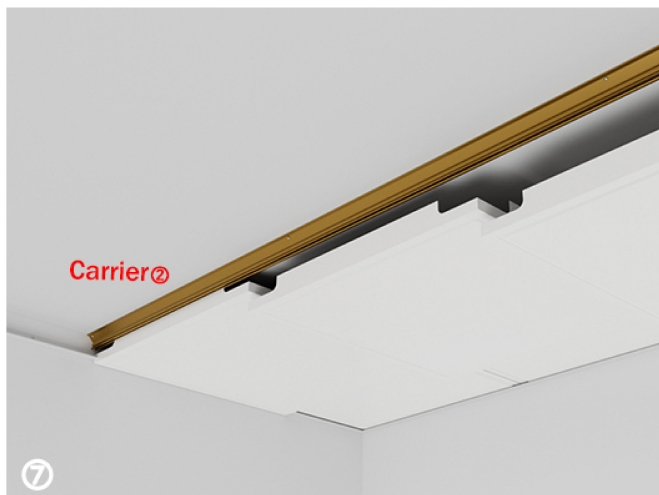


The two edge of the ceiling panel are respectively clip into the carrier① and carrier②.



Repeat steps 6 and 7 until the second row of ceiling is installed. Repeat this way, install the carriers and ceilings of each row.



When the ceiling is installed to the edge (end), the ceiling can be freely cut to fixed and complete the final installation.

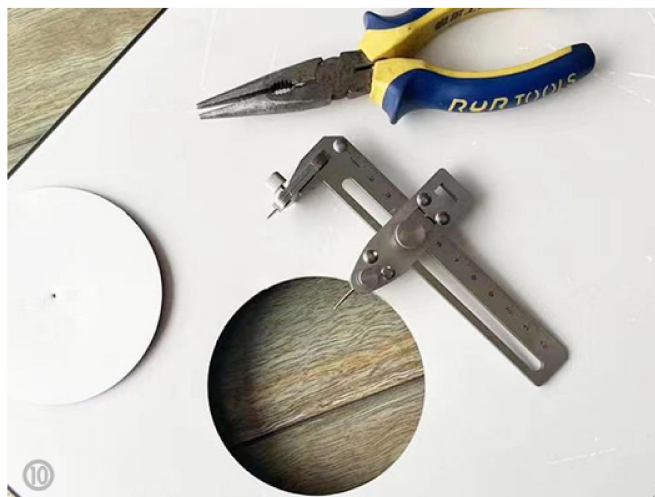

Note: the ceiling panel can be cut and opened according to the size of the lamp to install the lamp.

END