1.Turn off the power.

2.Unscrew two nuts (F)on the canopy (E).



Accessories:

3.Twist the tubes (H)(I) from the bottom up , when twisting the tubes, the wires should pass through each tube. Finally, the hanging ring on the canopy and the hanging ring on the tube is connected by tightening the K/D ring (G).



4.Install the mounting plate (D) with two screws (B)on the junction box (A).



5.Positive pole, negative pole, and the ground wire should all be connected to the wires correspondingly, and then the electrical tape wrapped with the wires and the wiring caps(C).



6.Lift the whole light upward , fix the screws in the two holes of the canopy (E), tighten the nuts (F), and hang up the light.



7. Install the glass shade(K).



8.Install the bulbs(L)(Not included).



E26 5*MAX 60W

9.Finished,turn on the light.





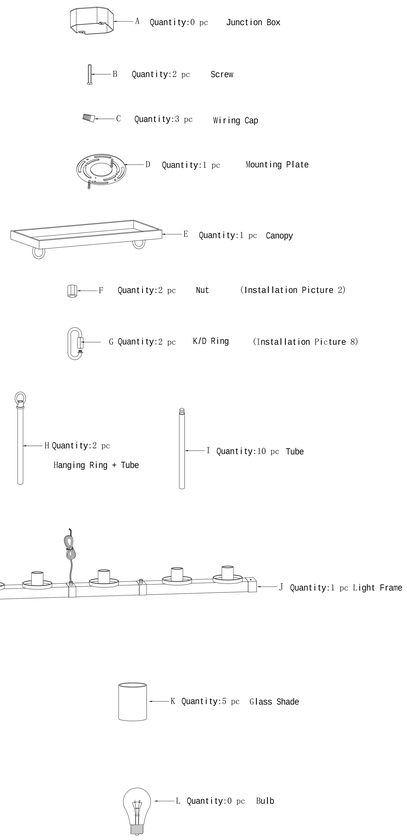

Notice:

This light fixture shoud be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect items and contents carefully. If any damage or defect is found, do not install it.