


Please consult your electrician for hanging fixture and wiring.

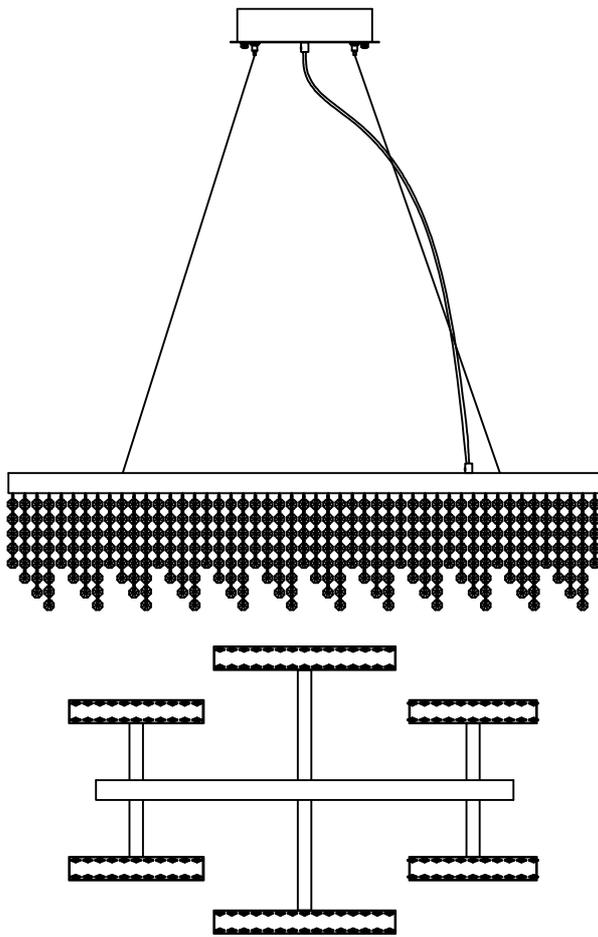

The fixture is list designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer. The above belongs in box with recommended drivers.

Below is a list of recommended dimmers:

Due to inrush current wattage should not exceed 150 watts of product a 600 watt dimmer.

Warning! This fixture is supplied with an installed LED driver. These fixtures are dimmable using standard triac dimmer. For best operation we recommend using Lutron CL Dimmers.

Bulbs (Included): 24W LED


**IMPORTANT:** Turn off the power at the main fuse or circuit breaker box before starting installation



(A)  
Mounting Bracket



(B)  
Anchor Bolts



(C)  
Canopy



(D)  
Finial





(E)  
Crystal Strand




(F)  
Diffuser

Locate all hardware & components before discarding packaging

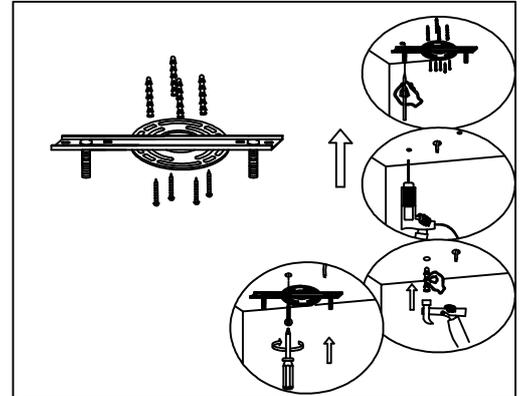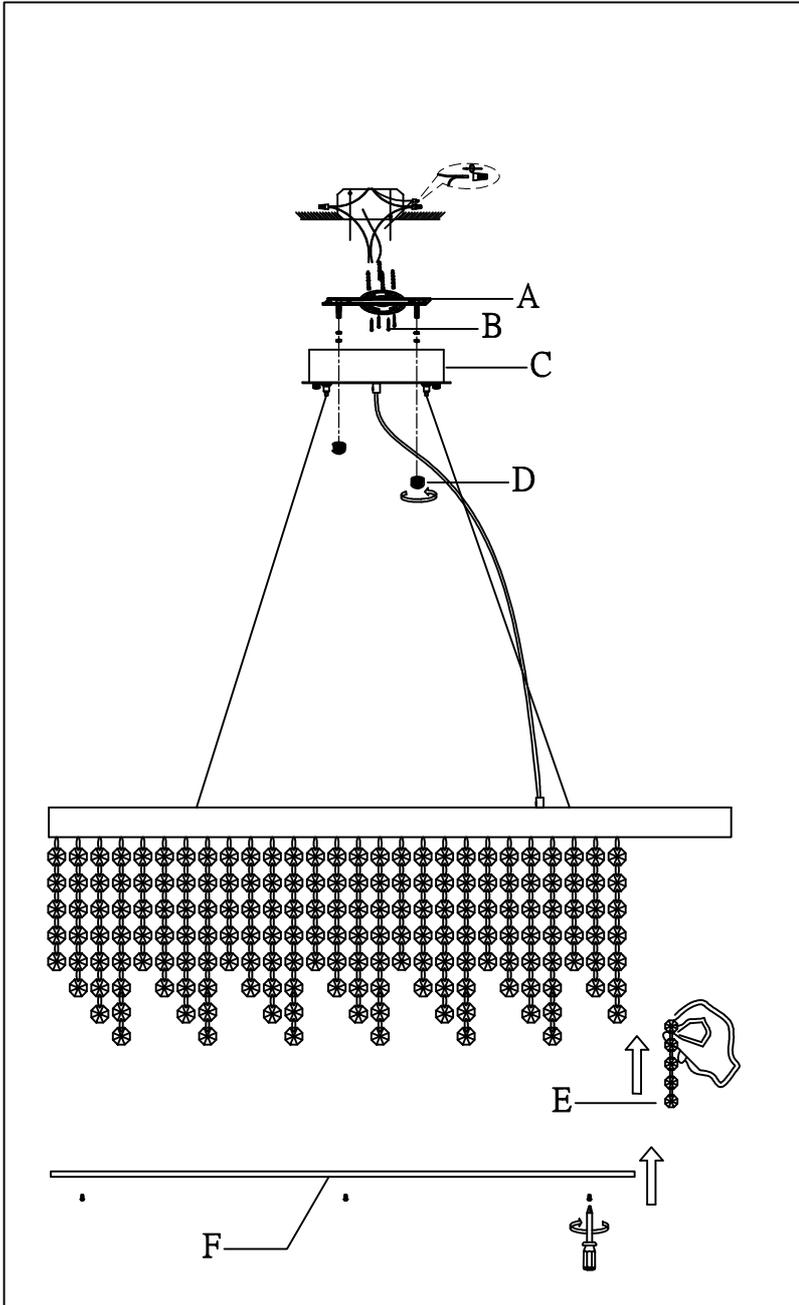


1.)

**Step.1:** Remove mounting bracket (A) and install to electrical box. Mark where anchors meet ceiling, remove mounting bracket from ceiling, and then drill holes using  $\frac{3}{16}$ " drill bit where marked (B). Install mounting bracket and attach anchors to secure bracket at ends.

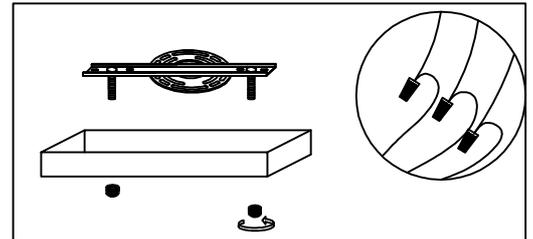


2.)

**Step.2:** Wire fixture to wires in outlet box. Green wire is for Ground. install canopy (C) to the bracket and tighten finial (D) until the canopy is flush with the ceiling.

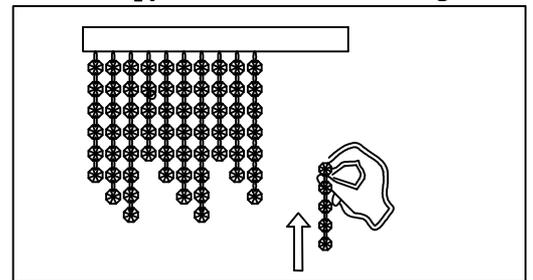

3.)

**Step.3:** Install the crystal as the following diagram on Page 3.

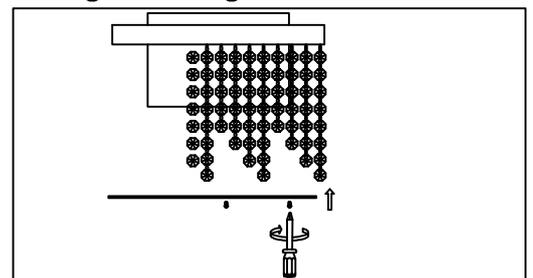

4.)

**Step.4:** Secure the acrylic diffuser by provided screws.

**Cleaning & Care:**

Clean with soft cloth and a mild detergent.  
Do not use abrasive cleaner.

# Crystal Diagram

