















**IMPORTANT NOTICE:
HARDWARE PACKAGE IS ATTACHED
ON THE BOTTOM OF SEAT CUSHION.**

(1)x1	(2)x1	(3)x1
		
Back	Seat	ARM Arm set
(4)x1	(5)x1	(6)x1
		
80mm Gas lift	Mechanism	27" Metal Base
(7)*5	<p>(A)-1pcs  M6*65 ARM SCREW</p> <p>(B)-8pcs  M6*25 ARM SCREW</p> <p>(C)-4pcs  M6*30 L-BAR SCREW</p> <p>(D)-4pcs  M8*22 MECHANISM SCREW</p> <p>(E)-1pcs  CAP</p> <p>(F)-1pcs  ALLEN KEY</p>	
		
Casters		

Insert and loosely tighten all screws. When assembly is completed, fully tighten all screws before using. This chair is only intended for sitting. Any other use will void the warranty.

1

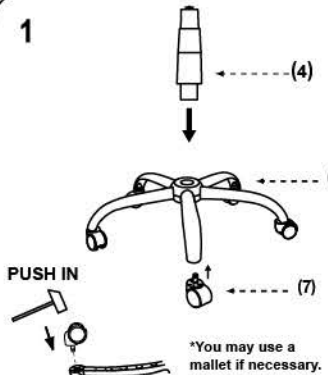


PUSH IN


*You may use a mallet if necessary.

2


Place the back cushion (1) lying flat on the ground with brackets pointing up. Fit the seat cushion (2) along the brackets of the back according to the arrow.

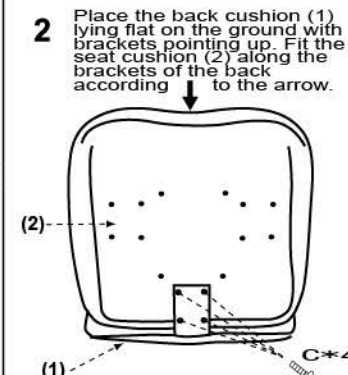

3

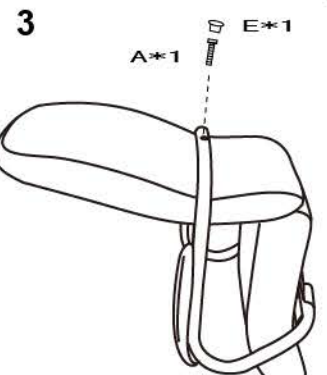


4

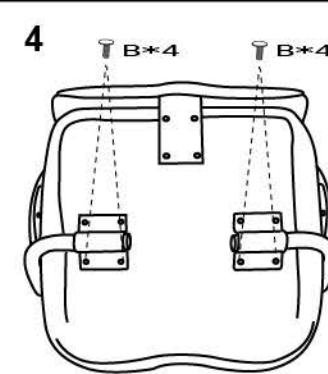


5


Loosely fasten screws manually and tighten them in final assembly.

6

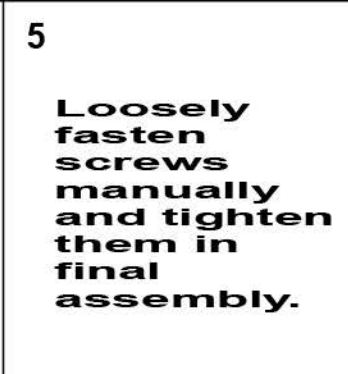

7

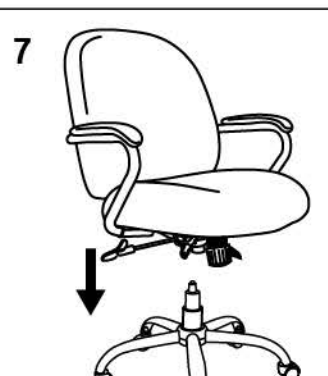

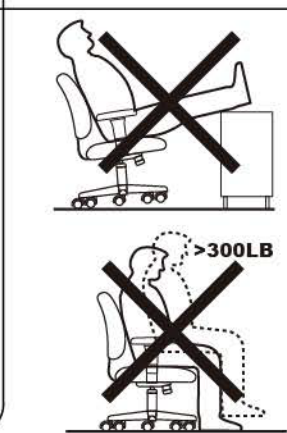

~~Use as a desk~~

~~Weight > 300LB~~

