

LIM TABLE

DESCRIPTION

LIM is a revolutionary ultra-slim LED task light that is as fun to use as it is functional. LIM's "L" shaped arm discreetly conceals an array of high-output LEDs and utilizes a magnetic attachment system for effortless adjustment. LIM is available in four models: LIM table, LIM floor, LIM360 and LIM C under-surface.

FIXTURE TYPE

Table

LIGHT SOURCE

(91x) High-output LED array

PRODUCT CODES

LIM L Table Brushed Silver:	LIM L TBL SLV BR
LIM L Table Black:	LIM L TBL BLK
LIM L Table White:	LIM L TBL WHT
LIM C Brushed Silver:	LIM C SLV
LIM C Black:	LIM C BLK
LIM C White:	LIM C WHT

LIGHT CONTROL

Hi-low dim control


FEATURES

- Magnetic attachment
- Advanced LED array eliminates multiple shadows
- Ships flat-packed
- OCC model available upon request

SPECIFICATIONS

- Voltage: 120/220V 60Hz
- Power consumption: 7W
- Color temperature: 3000K
- Luminosity: 295 Lumens
- Luminaire efficacy: 41 Lumens/Watt
- Color Rendition Index: 85 CRI
- 50K Hour lifespan
- Cord length: 10' (304cm)
- Global multi-plug adapter available
- 1 year warranty

CERTIFICATIONS



PACKAGING WEIGHT AND DIMENSIONS


LIM:	8.95LBS	25.5" X 13.5" X 2.5"
	4.1KGS	65cm X 34cm X 6cm

NOTES


- Occupancy sensor model available upon request
- Custom requests can be considered on volume orders



FINISHES



DIMENSIONS

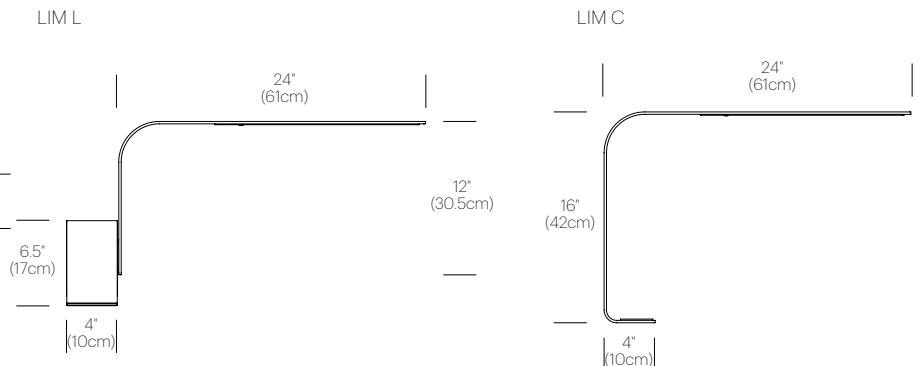

LIM FLOOR

DESCRIPTION

LIM is a revolutionary ultra-slim LED task light that is as fun to use as it is functional. LIM's "L" shaped arm discreetly conceals an array of high-output LEDs and utilizes a magnetic attachment system for effortless adjustment. LIM is available in four models: LIM table, LIM floor, LIM360 and LIM C under-surface.

FIXTURE TYPE

Floor

LIGHT SOURCE

(91x) High-output LED array

PRODUCT CODES

LIM L Floor Brushed Silver:	LIM L FLR SLV BR
LIM L Floor Black:	LIM L FLR BLK
LIM L Floor White:	LIM L FLR WHT
LIM L (arm only) Brushed Silver:	LIM L ARM SLV
LIM L (arm only) Black:	LIM L ARM BLK
LIM L (arm only) White:	LIM L ARM WHT

LIGHT CONTROL

Hi-low dim control


FEATURES

Magnetic attachment
Advanced LED array eliminates multiple shadows
Ships flat-packed
OCC model available upon request

SPECIFICATIONS

Voltage: 120/220V 60Hz
Power consumption: 7W
Color temperature: 3000K
Luminosity: 295 Lumens
Luminaire efficacy: 41 Lumens/Watt
Color Rendition Index: 85 CRI
50K Hour lifespan
Cord length: 10' (304cm)
Global multi-plug adapter available
1 year warranty

CERTIFICATIONS



PACKAGING WEIGHT AND DIMENSIONS


LIM Floor:	12.85LBS 45" X 13.5" X 2.5"
	5.8KGS 114cm X 34cm X 6cm

NOTES

Occupancy sensor model available upon request
Custom requests can be considered on volume orders



FINISHES



DIMENSIONS

LIM FLOOR

