
TONI-48in

ASSEMBLY INSTRUCTIONS

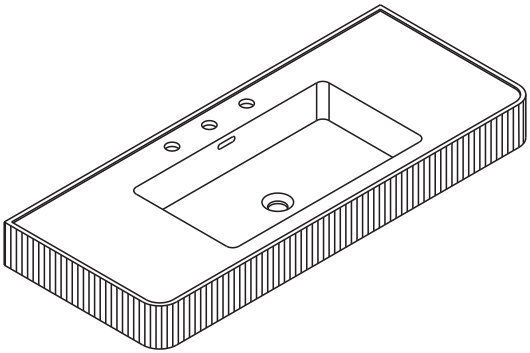

Based on your purchase, there are two installation options:

1.Place the basin on the top of the metal bracket and secure the rear part to the wall.

2.Place the basin on top of the cabinet.

This single-basin product is not recommended for wall-mounted installation alone.

Notice:

1.Follow the installation instructions. Please confirm all accessories are preset before installation.


2. Do not fully tighten the screws during initial assembly. Fully tighten screws only once all pieces which are correctly assembled.

3. If you encounter any problems during installation, please contact our customer service.


4. Please unbox the item from the side with an open-label and put a carpet on the foor to avoid scratching it.





Recommended installers : 2






Put a carpet on the floor before unpacking







Estimate installation time: 30 minutes







Item no.	Reference Image	Qty
A		x1
B		x2


Item no.	Reference Image	Qty
①		x2
②		x2
		x1

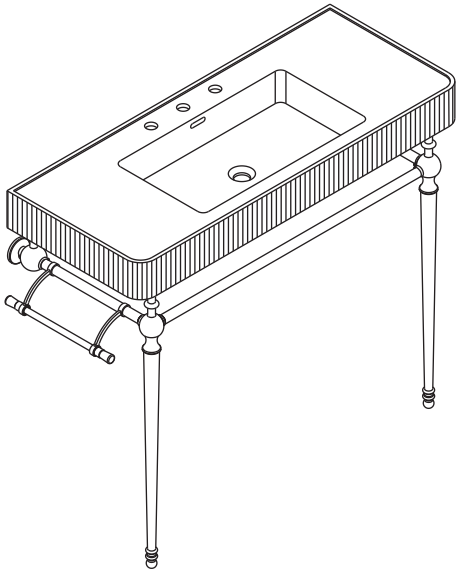


Your order will be shipped in multiple packages, and delivery times may vary.
We appreciate your patience and understanding.


1		x2
2		x2
3		x2
4		x2
5		x2
6		x1


7		x2
8		x1
9		x2
A		x1
B		x4
C	 Ø5x50mm	x4

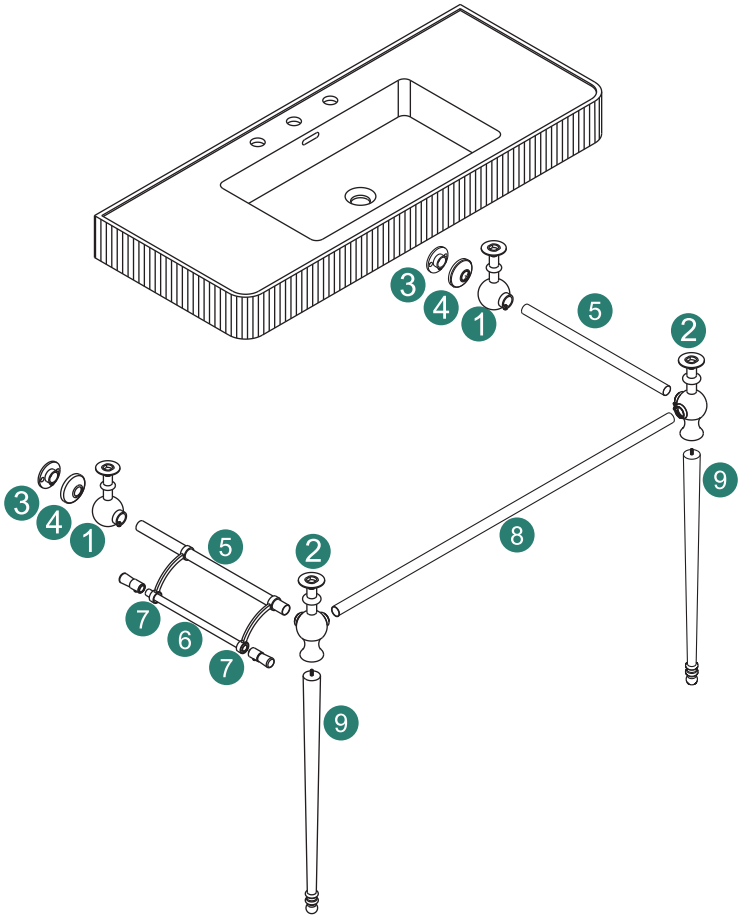
3
4
1
5
2
9
8
3
4
1
5
2
7
6
7
9

1




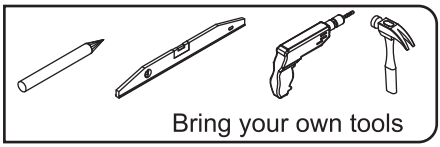


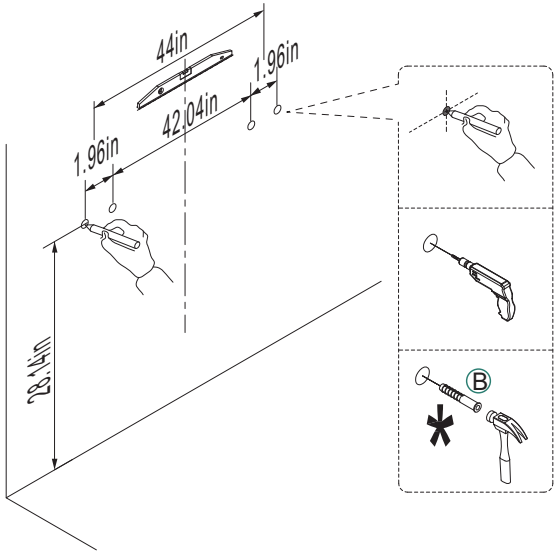


WARNING: To prevent falling down this product must be used with the wall attachment device provided.
WARNING: Assess the suitability of the wall to ensure that the fastening devices will withstand the forces generated.
WARNING: The maximum load-bearing capacity of this furniture is:40-60kg, please do not overload!
Load-bearing capacity primarily depends on the installation method and wall structure. Always identify the wall type first and hire professional installers using fasteners specifically designed for that wall type.


2






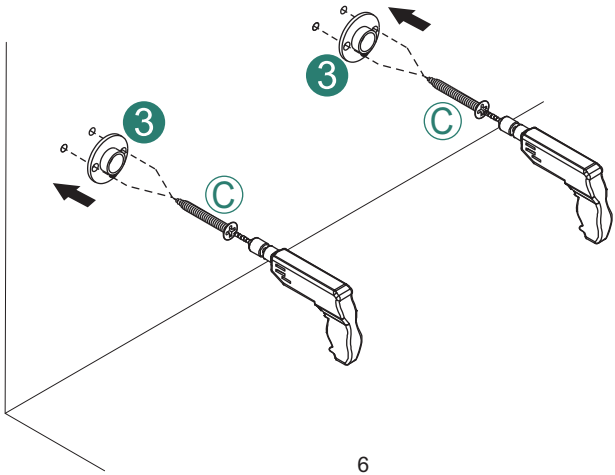


3

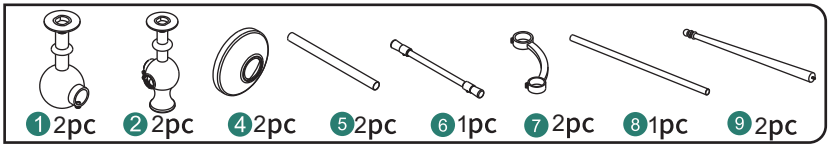

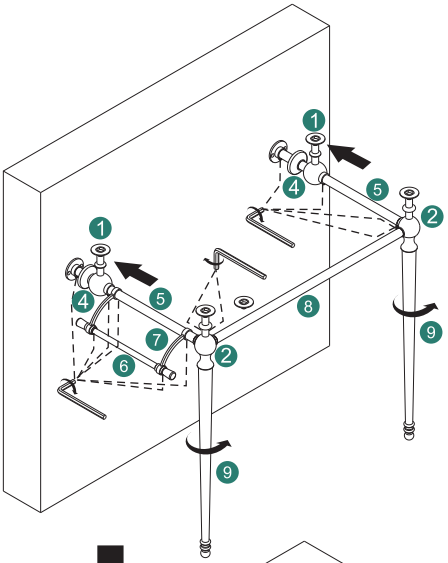



1. Connect the components correctly according to thenumbers and gently tighten the screws but do not lockthem in place.
2. The towel rack can be installed on the rods on the left, right, and front sides. Choose the ideal direction andgently insert it. Pay special attention not to scratch the surface coating of the round tubes during the insertion process!

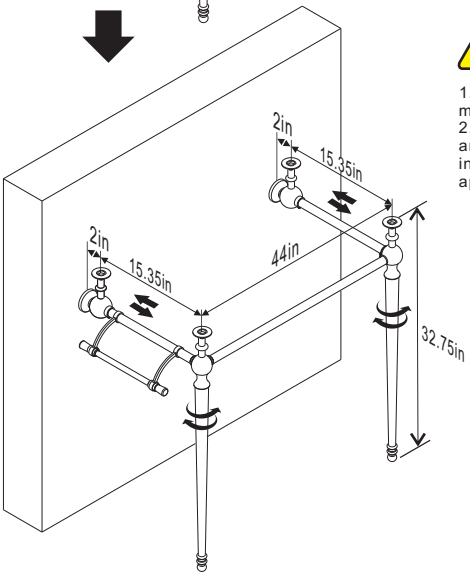


1. After adjusting the position according to the marked dimensions, tighten all the screws.
2. Once the towel rack is fixed, do not move it anymore. Avoid leaving any marks from the installation process that could affect the appearance!


4



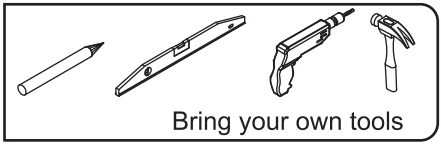


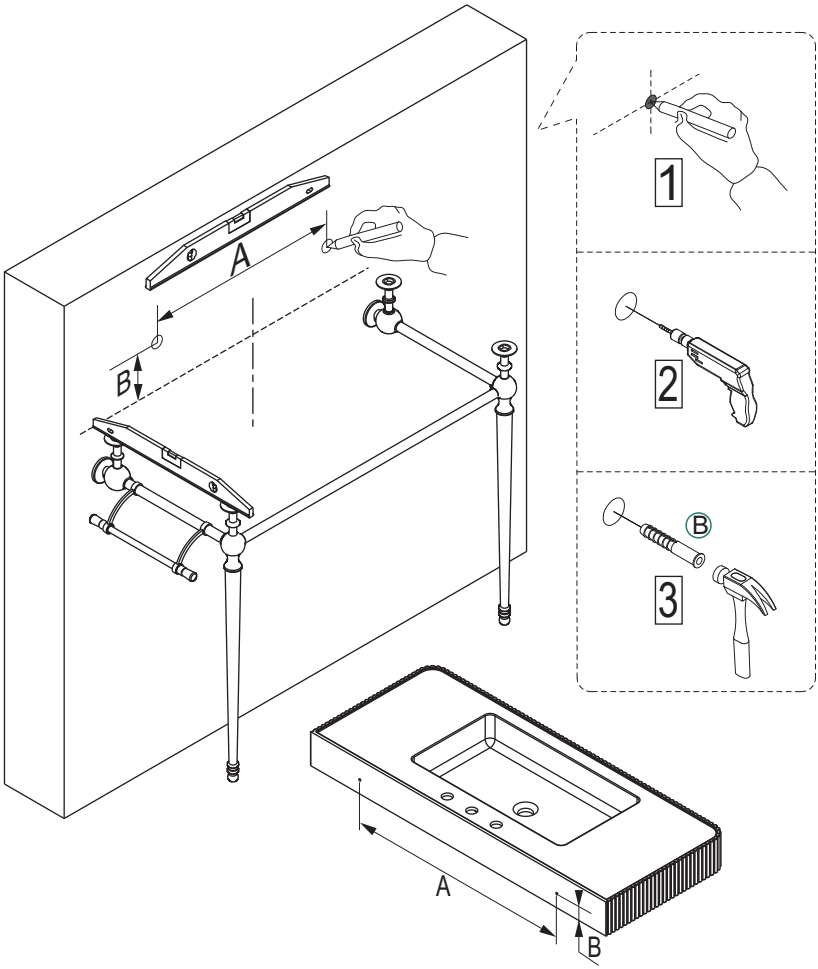


5




Ⓐ 1pcs

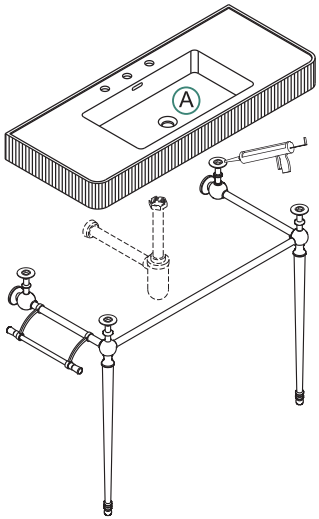


The tops of the four supporting pieces need to be coated with glass glue to better support the washbasin..







6



①2pcs ②2pcs

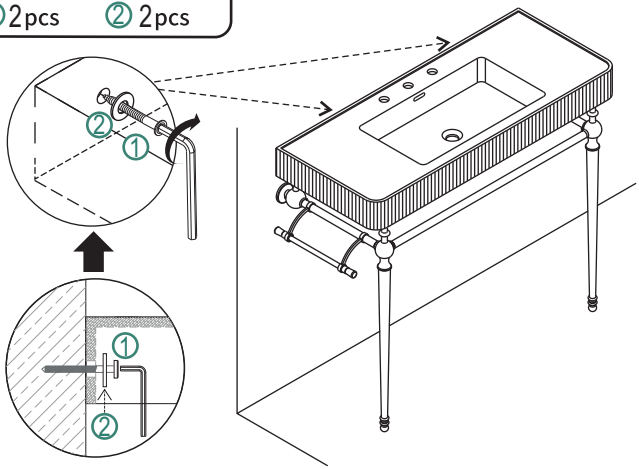


7

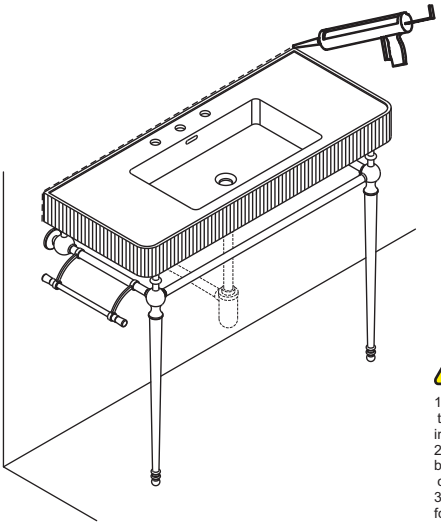


1. The three sides at the back of the basin need to be sealed with glue to enhance stability and improve appearance!
2. Wait until the glass gluehas completely solidified before using it. The time is approximately 12 hours or so!
3. Do not shake the support frame left and right forcefully!

7

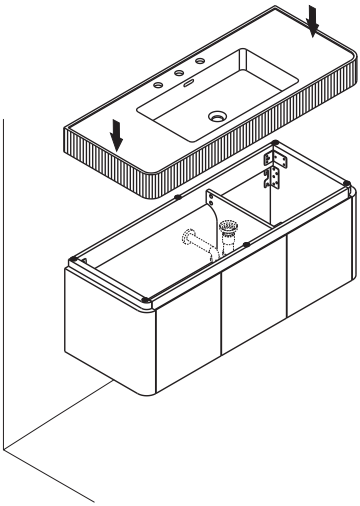

If you have purchased the cabinet as a separate unit, place the basin firmly on top of the installed cabinet.

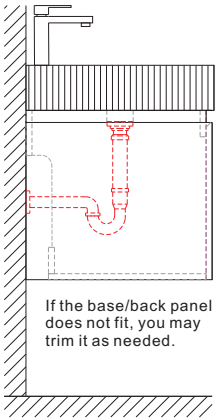


If the base/back panel does not fit, you may trim it as needed.

Installation of drain assembly

Pop-up Waste Installation

STEP 1
Install Pop-up Waste with over flow.

STEP 2
Connect the drain pipe.

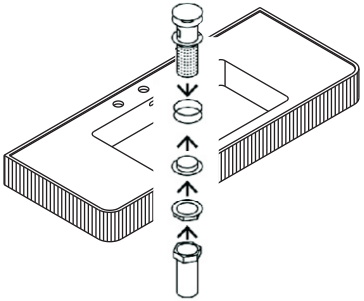

This product does not include faucet and drainage accessories. The content on this page is provided as installation suggestions only. Please carry out the installation according to the requirements of the product you actually purchased.

Always fully close the faucet after use!
Failure may cause:

Water Overflow
Continuous flow with blocked drain floods cabinetry, floors, and ceilings below, causing property damage and liability for compensation.


Personal Injury
Water accumulation significantly increases slip/fall risks (especially for children/elderly).

Cabinetry Damage
Water infiltration leads to swelling, warping, hardware corrosion, and countertop cracks.

Hidden Hazards
Persistent leakage erodes wall structures, breeds mold, and incurs high repair costs.

We strongly recommend that you:
- ☑ Confirm faucet is fully closed after each use;
- ☑ Regularly inspect faucet/hoses for leaks;
- ☑ Shut off angle valve immediately and seek repair if malfunction occurs;
- ☑ Cut off main water supply when leaving home long-term.

Disclaimer: Users bear full responsibility for damages caused by faucet left open or delayed repairs.

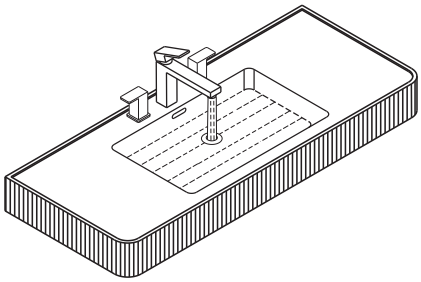

I. Product Overview

This artificial stone washbasin is made of a dense material, with a smooth and elegant appearance. It has excellent anti-stain and decorative properties. With proper use and regular maintenance, it can remain shiny and new for a long time, extending the product's service life. Please consumers carefully read this instruction and follow the usage guidelines.

II. Daily Usage Tips

1. Avoid contact with high temperaturesThe artificial stone has limited heat resistance. Do not place hot items such as boiling water jugs, hair straightening irons, hot water basins directly on the surface of the basin. High temperatures can cause the countertop to turn white, bulge, and crack. When placing hot items, it is necessary to use a heat insulation pad.
2. Do not scratch or collide with hard objectsDo not use utility knives, metal shovels, steel wires, etc. to rub the basin surface. Do not sharpen or cut hard objects directly on the countertop. Handle hardware and ceramic heavy objects with care. Forceful impact can cause chipping and internal dark cracks.
3. Stay away from strong corrosive chemicalsIf toilet cleaner, high-concentration bleach, oxalic acid, hair dye, nail polish remover, strong acid and strong alkali cleaning agents get on the basin surface, immediately rinse with clean water and dry. Long-term contact will corrode the surface layer, resulting in loss of luster and stubborn stains that are difficult to remove.
4. Clean up colored water stains in timeWhen colored liquids such as wine, juice, cosmetics, soy sauce, etc. spill, wipe them immediately. After washing up, dry the water in the basin. Long-term water accumulation and pigment retention can cause penetrating stains that are difficult to remove.

III. Standard Cleaning Procedures

1. Common daily stains (water stains, toothpaste, facial cleanser foam)Mix warm water with neutral detergent/washing liquid, use a soft sponge or ultra-fine cloth to wipe, rinse with clean water and dry with a dry cloth. This can effectively prevent water scale and water marks.
2. Water scale, slightly yellowed basin bodyMix white vinegar with water in a ratio of 1:2. Soak a soft cloth in it and apply it to the water scale for 3-5 minutes. Gently wipe and rinse with clean water. Only use the neutral stone cleaning product for artificial stone, and do not use industrial strong acid cleaning agents.
3. Pigment penetration marks (lipstick, hair dye stains)Select non-abrasive stone cleaning cream. Use a soft cloth to circle and gently wipe. Do not use steel wool, coarse abrasive cloth, or abrasive cleaning powder throughout the process.

IV. Regular Maintenance Procedures

It is recommended to conduct a maintenance once a month to restore the luster of the pot and form a protective film against stains:

1. Thoroughly clean the basin, dry all the moisture and keep it completely dry;
2. Apply the special maintenance and polishing paste for artificial stone, and polish evenly in circular motions with a soft cloth;
3. After standing for 10 minutes, remove the excess wax layer on the surface.* For matte finish artificial stone, please use the matte-specific maintenance agent to avoid the shiny wax causing surface blemishes.

V. Simple Solutions for Common Minor Defects

1. Minor scratches, discoloration due to high temperature and loss of luster: Use polishing paste and a damp soft cloth to repeatedly polish. Afterward, apply wax for maintenance to improve the condition.
2. Stubborn deep staining: Apply the special stone color remover overnight and clean the next day. If it cannot be removed, contact the after-sales service for professional grinding and refurbishment.
3. Minor cracks, corner damage: For minor damages, use the same color artificial stone repair adhesive to fill in. For severe damages, contact a professional maintenance personnel for handling.

VI. Tips for Long-Term Use

1. After washing up, immediately dry the water stains in the basin - this is the simplest and most effective method for preventing scale and seepage.
2. Keep the bathroom well-ventilated and dry to reduce the accumulation of scale in damp environments.
3. Store strong acid cleaning products separately and do not mix and soak them directly in the washbasin.
4. When not in use for a long time, clean and dry them, then apply a thin layer of maintenance wax for storage and protection.

VII. Important Disable Reminders

- ✕ Do not use steel wool, hard brushes, abrasive cleaning powders, or diamond abrasive cleaners to clean the surface;
- ✕ Do not immerse the basin for a long time in strong acids or high-concentration strong alkalis;
- ✕ Do not allow high-temperature objects to come into direct contact with the countertop without insulation;
- ✕ Do not cut or grind hard objects on the basin surface.