


Notification of the product

1. Kindly please use this product in house, since it is designed for house hold.
2. Before use, please check that screws, nuts and other fixing parts have been installed. Confirm that these parts are fixed.
3. Pay special attention to children. Plastic bags can cause asphyxiation.
4. Due to the weight and height of the product, please carry or move it by more than two people. Please handle it carefully.
5. Do not place or keep in the following places: an unstable place, such as one that is inclined or slippery, or one that often vibrates. A place of smoke, moisture or dust a place with poor ventilation. Extremely hot or cold places. Direct sunlight or close to heating appliances. In case of earthquake, please keep it in a safe place.
6. If you have any questions, please feel free to contact us.

Tightening instructions for non-slip screws


Secure the nuts on either side with two wrenches. One hand doesn't rotate, the other hand rotates. In this way, the screw can be turned.

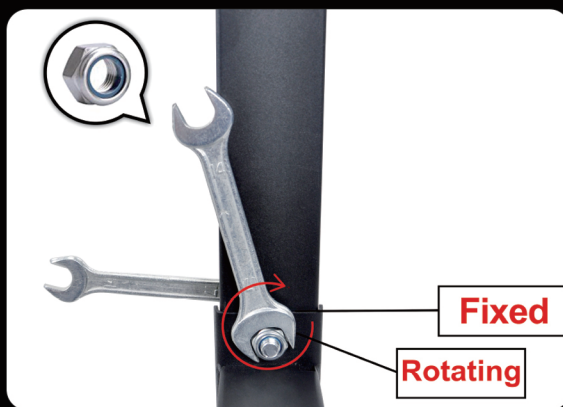

Scan the QR code to watch the installation video.

Guarantee Free repair for 1 year from purchase.


Weight Rack Instruction

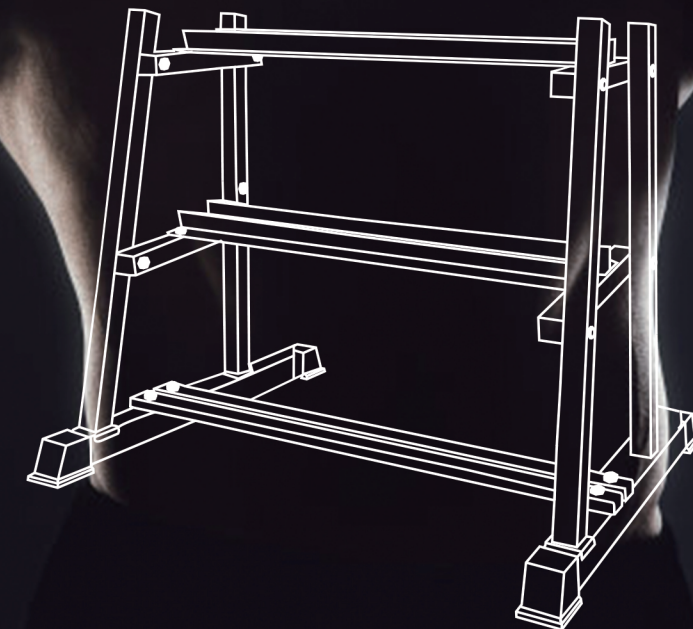





Weight Rack Instruction


Confirm the contents of the package are all included

Please feel free to contact us for missing parts or installation problems.

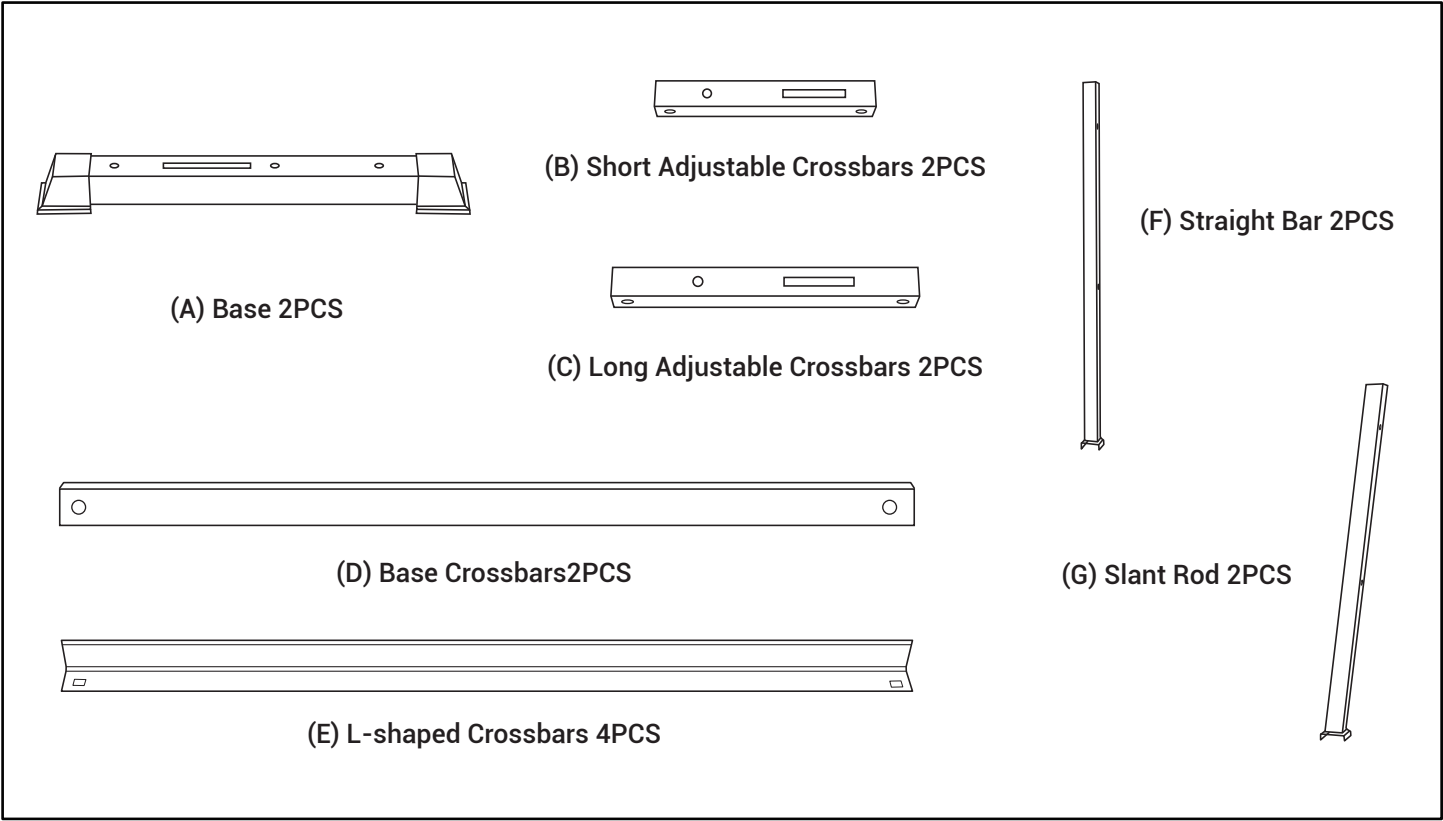


Note: After installing all the parts, then tighten the screws.

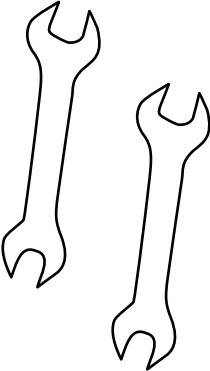(1)  10×85 ×16	(2)  10×50 ×8	(5)  ×2
(3)  ×44	(4)  ×20	

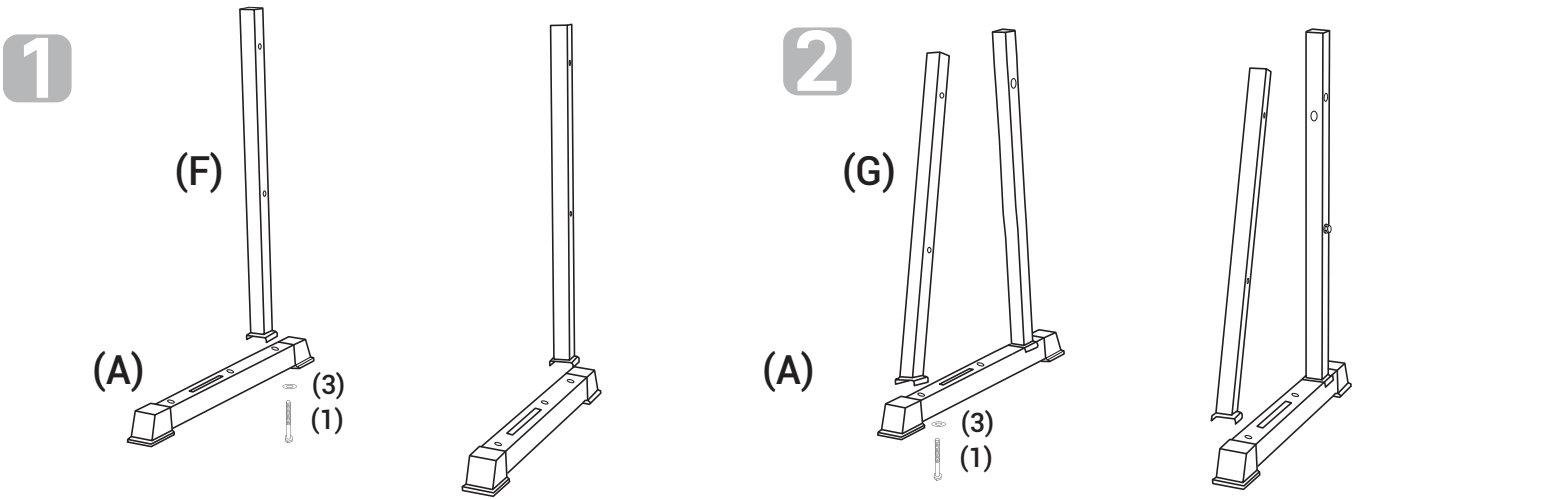


Attach the straight bar (F) to the base (A) on both sides with screws (1). (Base (A) is positioned as shown and straight bar (F) is recommended to be installed in the hole furthest from the rectangle on the base (A).)

Use screws (1) to install slant rods (G) on both sides of base (A).

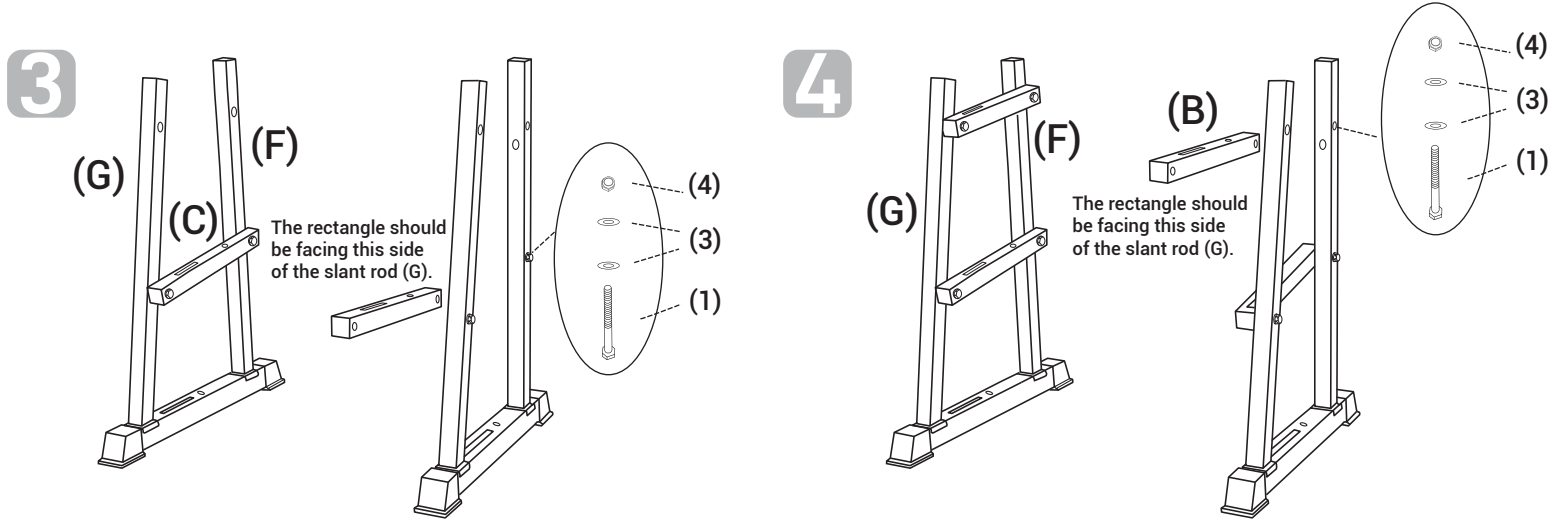

Install the long adjustable crossbar (C) midway between the slant rods (G) and the straight bar (F) with screws (1). (Take care to keep the orientation of the rectangles on both sides the same.)

Install the short adjustable crossbar (B) with screws (1) in the upper position of the slant rods (G) and straight bar (F).

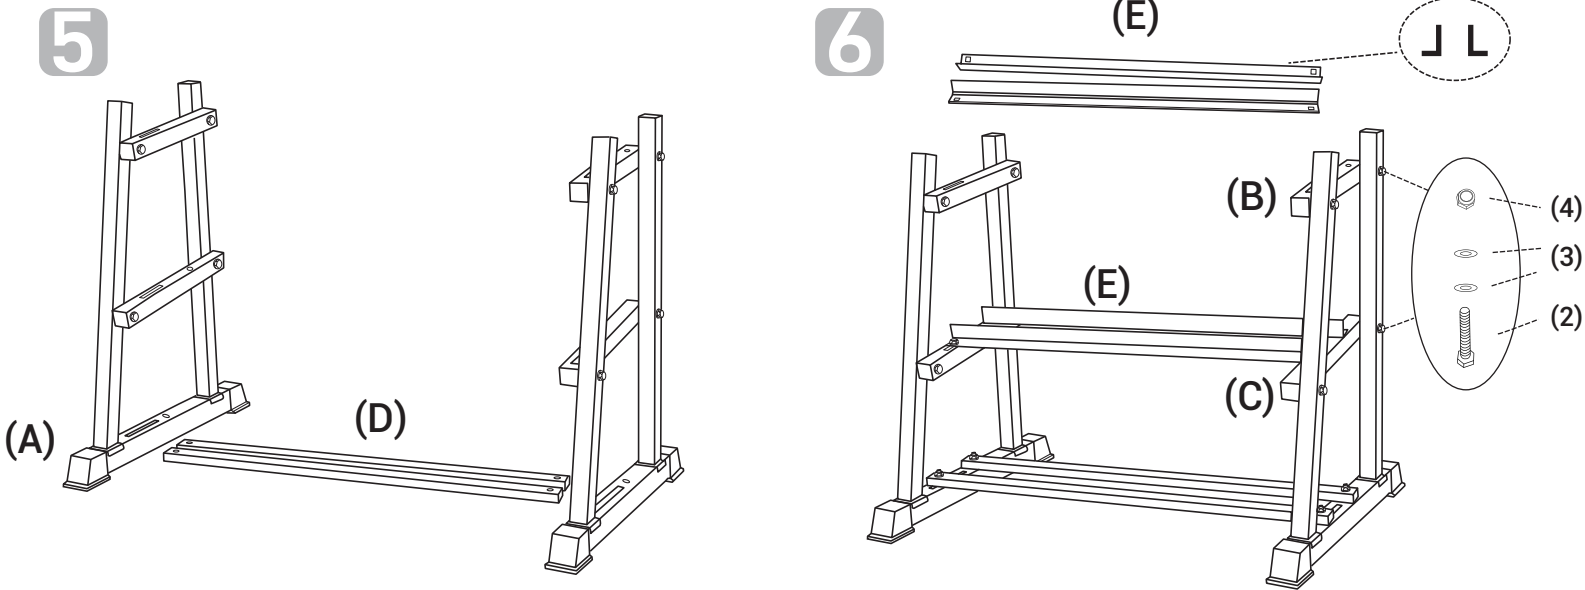

Attach both sides of the base (A) with the base crossbar (D) by screws (1).

Attach the two L-shaped crossbars (E) to the long adjustable crossbar (C) and short adjustable crossbar (B) with screws (2).