


edishinē

Floor Lamp

[Instruction Manual]









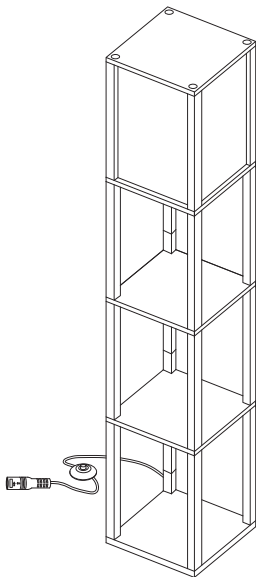









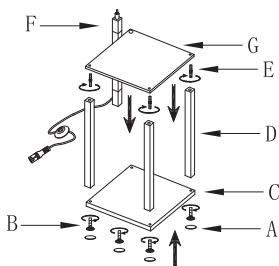
Please pay attention to the warning signs
Read the instructions with caution before operating
and keep it properly

CAUTION


1. Before assembly, place all parts out on a clean flat surface and inspect each part for defects that may have occurred during shipping.
2. Inspect wire insulation for any cuts, abrasions or exposed copper that may have resulted during shipping. If there are any defects in the wire, DO NOT continue assembly. Please send an email to our Customer Service immediately.
3. Consult a qualified electrician if you have any electrical questions.
4. Never drape clothes over the lamp.
5. To reduce the likelihood of tipping over, we recommend placing the lamp behind furniture and keep children and pets away.
6. To prevent children from suffocating and choking, keep them away from packing materials.
7. Please keep this manual and hand it over when you transfer the product.

Packing List


 A x 1	 B x 8	 C x 1	 D x 9
 E x 10	 F x 1	 G x 2	 H x 1
 I x 1	 J x 1	 K x 4	 L x 4
 M x 1	 N x 1	 O x 1	 P x 1




1. Assemble the lamp base by screwing bolt(B) three poles (D) and an LED pole with wire (F) clockwise into the thick baseboard (C) until tight. Place the cushion (A) to cover each hole. Then screw the two-side bolts (E) into three poles (D) and place the middle board (G) on the bolts. Ensure that the big hole on the board is on the same side as the LED pole with wire (F).

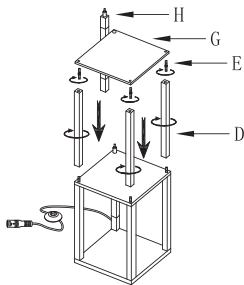


2. Screw three poles (D) into the exposed part of the two-side bolts (E). Take the LED pole with the direct current connector (H) and connect it with the exposed part of the direct current connector. Then, screw the two-side bolts (E) into the three poles (D) and place the middle board (G) on the bolts.



3. Screw three poles (D) into the exposed part of the two-side bolts (E). Take the LED pole with wire (I) and connect it with the exposed part of the direct current connector. Then, screw the two-side bolts (E) into the four poles (D and I) and place the middle board (J) on the bolts, ensure the LED light on the middle board (J) is upwards.

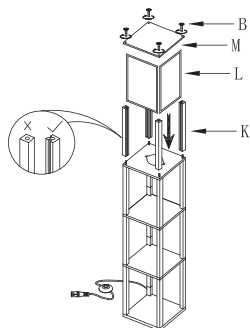

4. Screw four poles (K) into the exposed part of the two-side bolts (E). Ensure that the installation groove of the light shield on the pole (K) faces inwards. Insert the four light shields (L) into the installation groove of the light shield. Then, tighten the bolts (B) clockwise to secure the top board (M) and the four poles (K) until they lock.

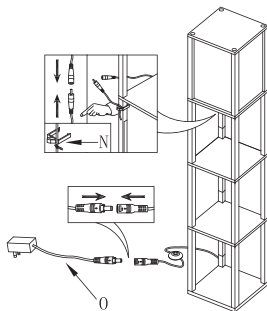

5. Connect the wire connector between the middle board (J) and the pole (I). Fix the wire fixture (N) to the pole (I), and then secure the wires to the wire fixture (N). Connect the wire connector between the power adapter (O) and the pole (F). Plug in the power adapter (O) and press the foot switch to light up.

6. Brightness Adjustment:

· Short press the foot switch:

ON-3000k-4000k-5000k-OFF

· Long press the foot switch:

Adjust brightness from 10% to 100%

Specifications

- Product Height: 163 cm
- Base Diameter: 29 cm
- Cable length: 170 cm
- Materials: Wood, Iron, PVC
- Input Voltage: 100-240VAC 50/60Hz
- Power: 20W
- Lumen: 1530LM

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date. Please note that the warranty does not cover damage caused by personal misuse or improper installation.

Please attach your Order ID and Name so that our dedicated customer service team can help you better.