Wall Sconce in Alabaster SAFETY,

INSTALLATION & CARE INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS

We strongly recommend that all direct-wired lighting products be installed by a licensed electrician.

Two people may be required for installation. DO NOT EXCEED the rate bulb wattage. Keep flammable materials away from bulb. This light fixture is shipped with all internal wiring intact. Do not open the product or alter the wiring in any manner.



WARNING: Be certain that the power to the electrical junction box is turned off at the circuit breaker before installation. Turning the power off at a light switch is not sufficient to prevent electrical shock.

CAUTION:
Prior to installation, locate ALL PARTS INCLUDED before disposing of packaging materials.

Tools Required for Installation:

Phillips and Flat-blade Screwdrivers	Drill
Pliers	Wire Connectors
Electrical Tape	

Parts Required (not included):

Part	Qty.	Description
(A)	1	Junction Box
(B)	1	Ground Junction Box Wire
(C)	1	Hot Junction Box Wire
(D)	1	Neutral Junction Box Wire

Hardware and Parts Included:

Part	Qty.	Description	Part	Qty.	Description
(E)	1	Mounting Plate	(I)	1	Ground Wire
(F)	1	Mounting Screws	(J)	1	Hot Wire
(G)	3	Wire Connectors	(K)	1	Neutral Wire
(H)	1	Ground Screw			

Important Safety Instructions:

For your safety, use of a two-person installation team is strongly recommended.

This product must be installed in accordance with the applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.

This fixture has been rated for up to one (1) 40W-maximum Type B incandescent light bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

This fixture is meant for indoor use only.

Wall Sconce in Alabaster SAFETY,

INSTALLATION & CARE INSTRUCTIONS

WARNING:

Do not touch the bulb when the fixture is turned on. Do not look directly at the lit bulb.


Keep flammable materials away from the lit bulb.

To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug the fixture and allow it to cool prior to replacing the light bulb

INSTALLATION PROCEDURE: Refer to Figure 1.

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
2. Carefully unpack all fixture parts and hardware and lay them out on a clean work surface.
3. Attach the Mounting plate(E) to the Junction Box(A) using two Mounting screws(F). Tighten screws with screwdriver until secure.
4. Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION BOX WIRE (white) HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (black). Fasten each together with a plastic wire connector (G) and wrap the connection with electric tape. Be sure no wire strands are exposed
5. Gently tuck the wire connections neatly into the Junction Box(A). Put the lamp body up to Mounting plate(E) and fasten by Finial.
6. Insert (1) 40-watt maximum TYPE B standard incandescent light bulb (not included) into the socket.

Figure 1

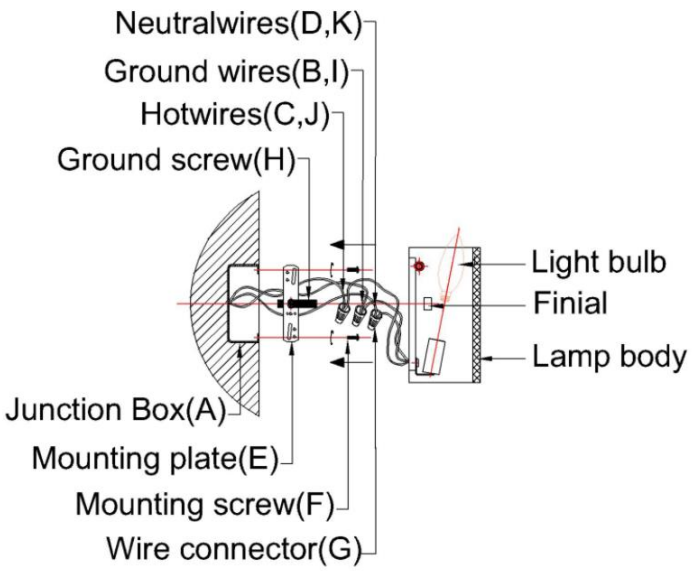

CARE & CLEANING:

To clean, wipe the fixture ONLY with a soft, dry cloth.

SAVE THESE INSTRUCTIONS