EGG Passage Knob



Specifications

Latch Type 2-Way Latch & Universal Latch available

Door Prep Cross bore 2-1/8" dia (54mm). Edge bore 1" dia

(25mm)

Backset Adjustable to 2-3/8" or 2-3/4" **Door Thickness** 1-3/8" - 1-3/4" door standard

Cylinder -

Faceplate 1" x 2-1/4" radius corner. (Square and drive-in also

available on Universal)

Strike Standard radius corner . Other options available.


Latch Bolt Full 1/2" throw. Nickel plated.

Door Handing Non-handed. Reversible for Left or Right hand doors.

Keyway — Keyed Alike —



Dimensions

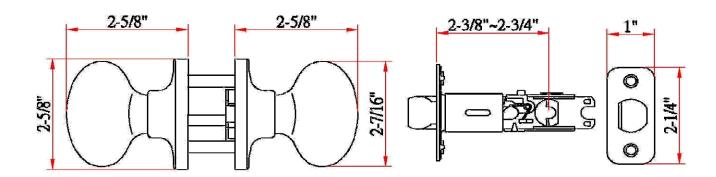

Warranty & Compliances

Warranty Limited Lifetime Mechanical / 5 year Finish

ANSI/BHMA Meets ANSI Grade 3 specification

ADA N/A UL N/A







Order Codes

 Box Pack
 2W
 Universal

 Satin Nickel (US15)
 750489
 740464

 Oil Rubbed Bronze (US10B)
 750570
 740472

View Pack

 Satin Nickel (US15)
 750307

 Oil Rubbed Bronze (US10B)
 750398



Type: Job:

Order Code: Approvals:

Design House reserves the right to make changes in materials, specifications & models at any time. Design House also reserves the right to discontinue product without notice or obligation.