
# **LEVON™CUSTOM**

# MAD7912B\*\* **Ceiling Fan**



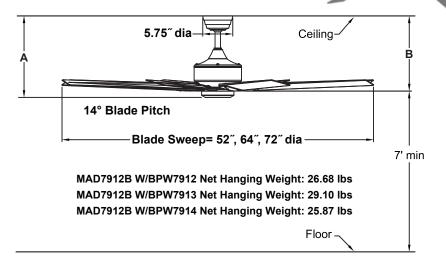

## **INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

#### **ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

#### **MOTOR SPECS:**

DC-165NM sensorless DC motor is designed for optimal performance with this fan.

#### **BLADES:**

8 bladed blade sets are available in plastic and wood materials - all sold separately. See our catalog or visit www.fanimation.com for blade options.

## **CONTROL OPTIONS:**

TR205D hand-held remote control is included. Push button remote control with variable fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control and WFR7912 receiver are available—sold separately. Instructions are provided with each control.

ICLITING.	ODTIONS.

LK7912B One 18-watt dimmable LED.

### LIGHTING OPTIONS:

# **DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and d 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". The fan can be mounted on a sloped ceiling up to 27°. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Call technical support for more information.

#### **LOCATION USE:**

Fan is rated for dry and damp locations.

Available Finishes			
BL	Black		
BN	Brushed Nickel		
DZ	Dark Bronze		
GR	Matte Greige		
GZ	Galvanized		
MW	Matte White		

	Α	В
Fan w/6" downrod	15.58"	14.40″
Fan w/12" downrod	21.58"	20.40"
Fan w/18" downrod	27.58"	26.40"
Fan w/24" downrod	33.58"	32.40"
Fan w/36" downrod	45.58"	44.40"
Fan w/48" downrod	57.58"	56.40"
Fan w/60" downrod	69.58"	68.40"
Fan w/72" downrod	81.58"	80.40"

Airflow / Energy Efficiency Info Energy Star test with BPW7913 Blade in 72″sweep					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	95	8244	270	0.40	31
Med	72	6158	445	0.21	14
Low	48	4090	784	0.08	5

Energy Guide FTC Measured with BPW7913 Blades in 72" sweep					
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)		
21	6177	6	291		