Installation Instructions

4. Take out two screws on the two sides of cartridge protective cover with screwdriver. Then remove the plastic protective cover.

Please Note:

If necessary for installation, the box can be cut appropriately according to the case surface tips.

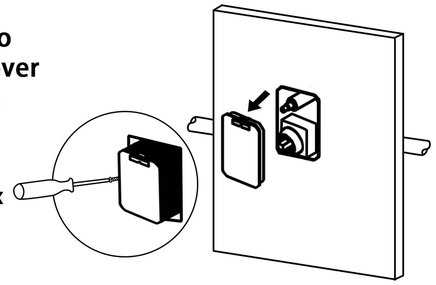

5. Install the escutcheon and press in. Make sure valve is in off position.

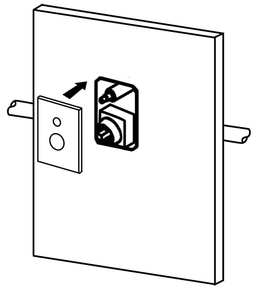

6. Press the conversion handle onto then cartridge.(Tips:You need to keep the white indicator line on the conversion upward, and then adjust the conversion button to a position where it can only rotate within 90 degrees to the left). Spin small hex screw with hex key till it is tighten. Then put the small decorative cover into the small hole.

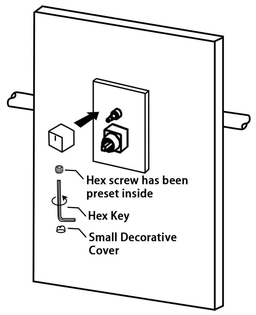

7. Install the handle down on the cartridge front switch. Spin small hex screw with hex key till it is tighten. Then put the small decorative cover into the small hole.

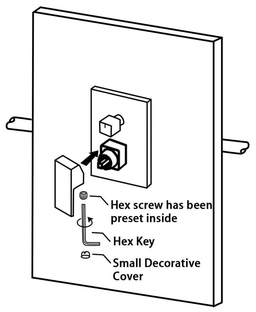

8. Before installation, please slip flange onto of the shower arm. Wrap threads of the longer end of the shower arm with teflon tape and install the shower arm.

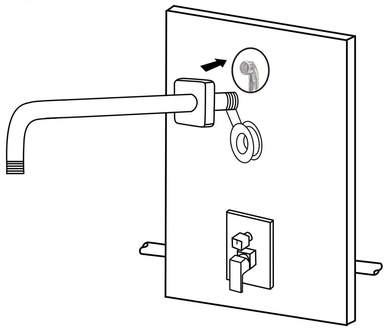

Have a question? Just send an email to
g-promise@vip.163.com

Installation Instructions

9. Before installation of rainfall showerhead. Wrap threads of shower arm with teflon tape and then install rainfall showerhead. Then tighten it with a wrench.

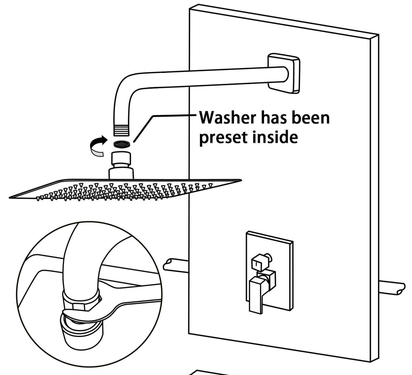

10. Before installation of the handheld holder. Wrap threads of the handheld holder with teflon tape. Then screw it onto the wall directly till it is firmly fixed.

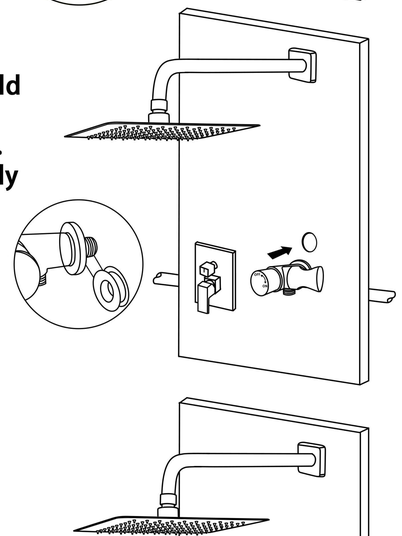

11. Connect the hose and hand shower head to the holder.

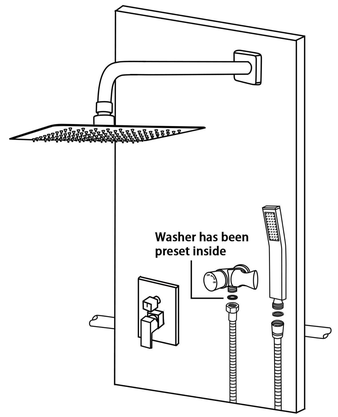

12. Complete the installation.

Please Note:

1. Turn water on and check for leaks on all joints, please repeat the needed steps to fix if leaks.
2. The knob can turn on/off the water from hand shower seperately. Please follow the sign on the knob.

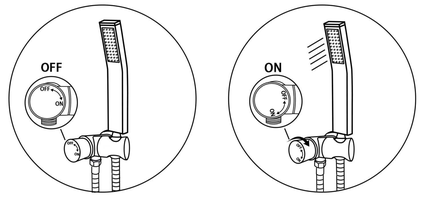

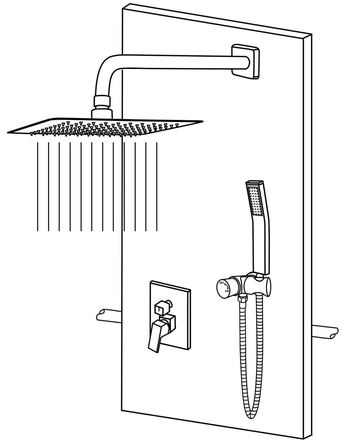

Installation Instructions

13. Temperature control handle instructions and holder switch instruction.

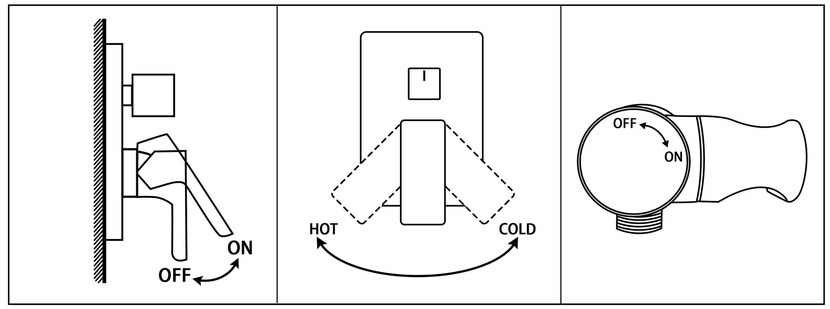

14. 3 water outlet modes instruction.

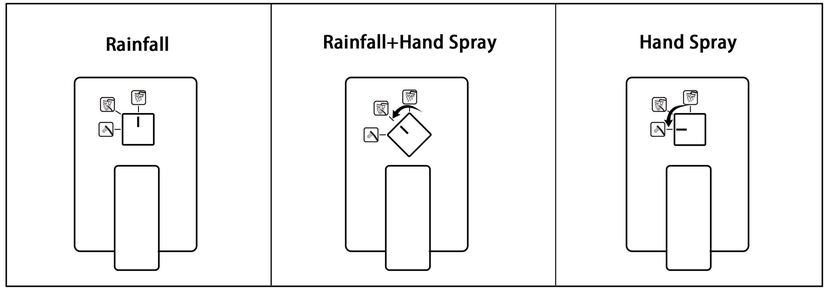

15. If you want a more powerful water flow, you can choose to remove the restrictor.

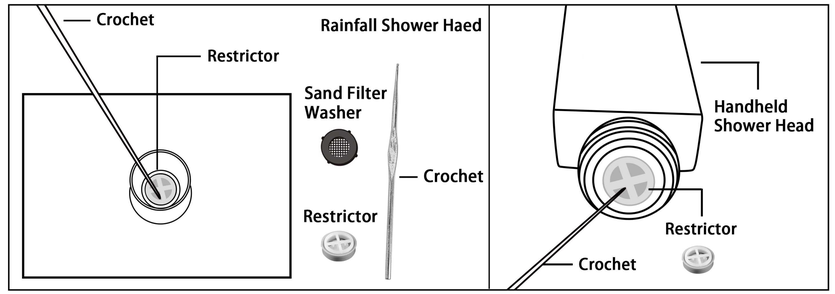

Trouble-Shooting

If you've followed the instructions carefully and your faucet still does not work properly, take these corrective steps.

Problem	Cause	Action
Leaks underneath handle.	Lock nut has come loose or o-ring on cartridge is dirty or twisted.	Tighten the lock nut. Clean or replace o-ring on cartridge.
Water will not shut off completely.	Rubber valve seat at the base of pressure balance cartriage is dirty or broken.	Remove handle and pressure balance cartridge to check the rubber valve seat. Clean or replace it.

Have a question? Just send an email to
g-promise@vip.163.com