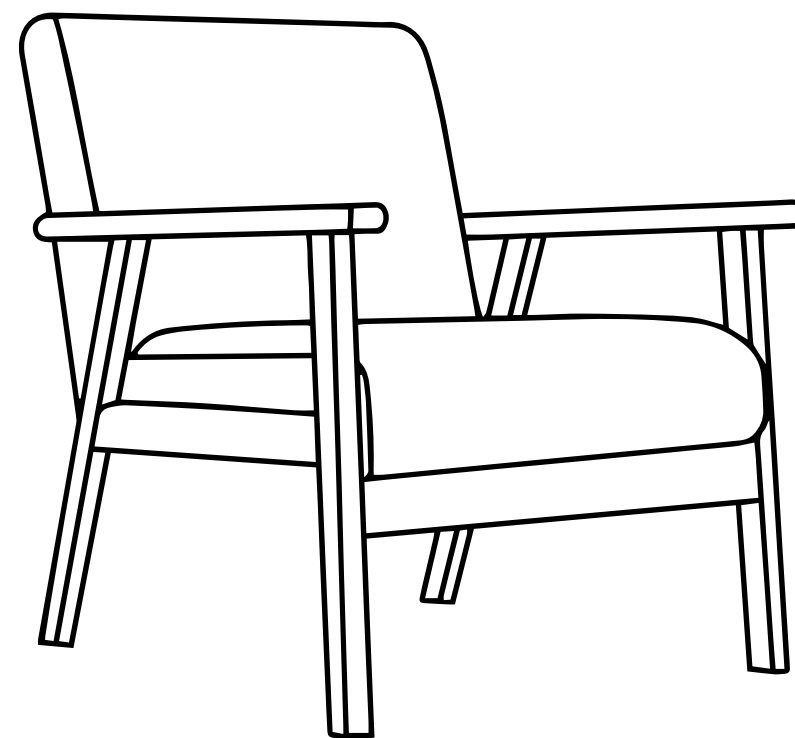

Dear customer,

Thank you for ordering Japanese single sofa from our brand. When you receive our products, I hope you can feel our sincerity. I am very sorry if the purchase and use experience brings you an unpleasant experience due to unexpected reasons. If you have any questions, please feel free to contact me. Please allow me to answer your questions as soon as possible.

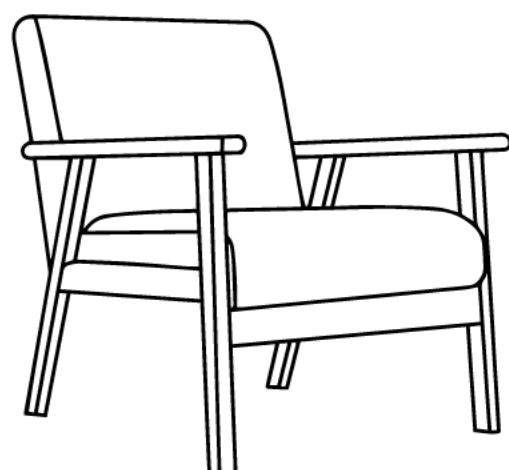
Thank you again for your trust and support. Looking forward to your next visit.

Japanese single sofa



INSTRUCTION MANUAL

Product Parameters



- Name:
Japanese single sofa
- Material:
100% linen blend fabric, rubber wood
- Size:
25.6*24.8*27.9in
- Characteristics:
Solid wood handrail, Ergonomic backrest design, Thick seat cushion


Assembly Preparation

Thank you very much for purchasing this product.
For comfortable use, be sure to read the following precautions and assemble correctly.
Please keep this book properly after assembly.


- ① Please prepare a screwdriver.
- ② Please lay a mattress for assembly to avoid scratching the floor in a flat and spacious place.
- ③ If there is any peculiar smell when opening the package, please ventilate first.
- ④ Assemble accessories. Please confirm whether all parts are complete for assembly.
- ⑤ Always check whether the screws are loose.



※ Please contact the sales store if you do not understand.

Parts List:

A Screw(M6×60)  x 12	B. Shim  x 2	C.Nut  x 4
D.Foot pads  x 4	E.Wrench  x 1	 Assembly requires a screwdriver.

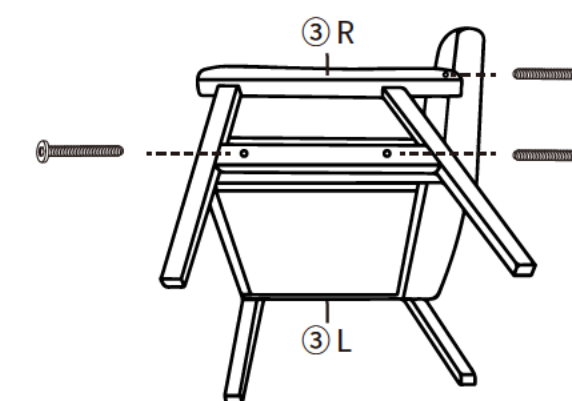
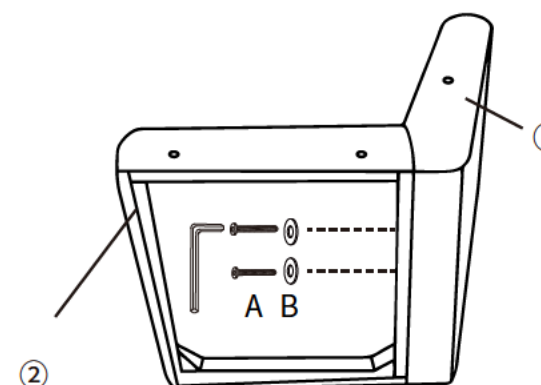
Parts List:

- ① Sofa back × 1

- ② Sofa cushion × 1

- ③ Armrests × 2
L × 1  R × 1 
- ④ Link Board × 1

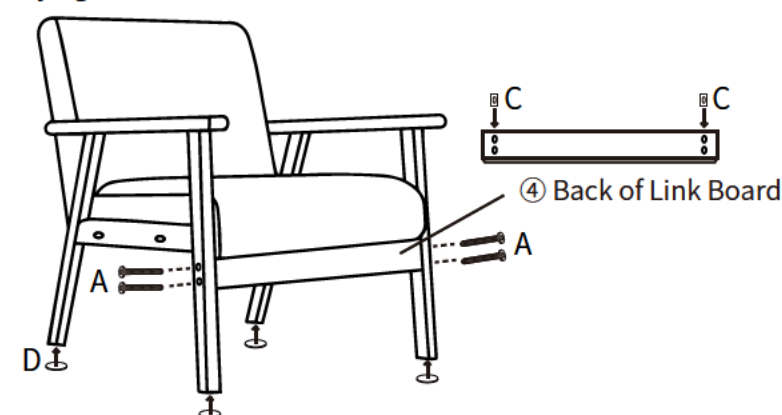

Assembly Steps

1. As shown in the figure below, remove the non-woven fabric on the back of the seat surface and install ① back and ② cushion.
Please carry out the following assembly under the temporary fastening state.
※ (temporary fastening)... The state before fully tightening the bolts.
※ after installation, please install the non-woven fabric on the back of the seat surface again.
2. As shown in the following figure, install ③ right elbow (R). Please carry out the following assembly under the temporary fastening state.
Please do the same for the left elbow.
※ (temporary fastening)... The state before fully tightening the bolts.



3. As shown in the following figure, after installing ④ the link board. Tighten the bolts.

After the temporary fastening of all bolts, please adjust the overall shape and formally tighten.



4. Installation is complete.

