

Features

- Cast iron with Safeguard® finish
- Left or right drain
- Extra 4" (102 mm) ledge
- 60" (1524 mm) x 34-1/4" (870 mm) x 14" (356 mm)


BATH
K-713
ALSO K-714

ADA

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.1/CSA B45.2

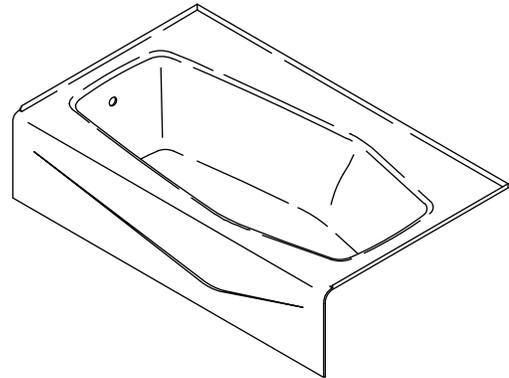

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-713	Bath – left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-714	Bath – right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories			
K-7213	Clearflo bath cable drain with PVC tubing	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-7214	Clearflo bath cable drain without PVC tubing	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-7160-TF	Clearflo pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____

Product Specification

The bath shall be made of cast iron with Safeguard finish. Product shall be 60" (1524 mm) in length, 34-1/4" (870 mm) in width, and 14" (356 mm) in height. Product shall have an extra 4" (102 mm) ledge. Product shall be available with a left or right drain. Product shall be ADA compliant when installed per Section 607 of the Act. Bath shall be Kohler Model K-____-____.

VILLAGER™

Optional Accessories

K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Technical Information


Fixture*:	
Bathing well:	
Basin area, bottom	45" (1143 mm) x 22" (559 mm)
Basin area, top	55" (1397 mm) x 24" (610 mm)
Weight	330 lbs (149.7 kg)
To overflow:	
Water depth	8-5/8" (219 mm)
Capacity	33 gal (124.9 L)
* Approximate measurements for comparison only.	

Installation Notes

Install this product according to the installation guide.

Floor support under the bath must provide for a minimum of 51 lbs/square foot (250 kg/square meter) loading.

Will comply with **ADA** when installed per Section 606 Bathtubs of the Act.

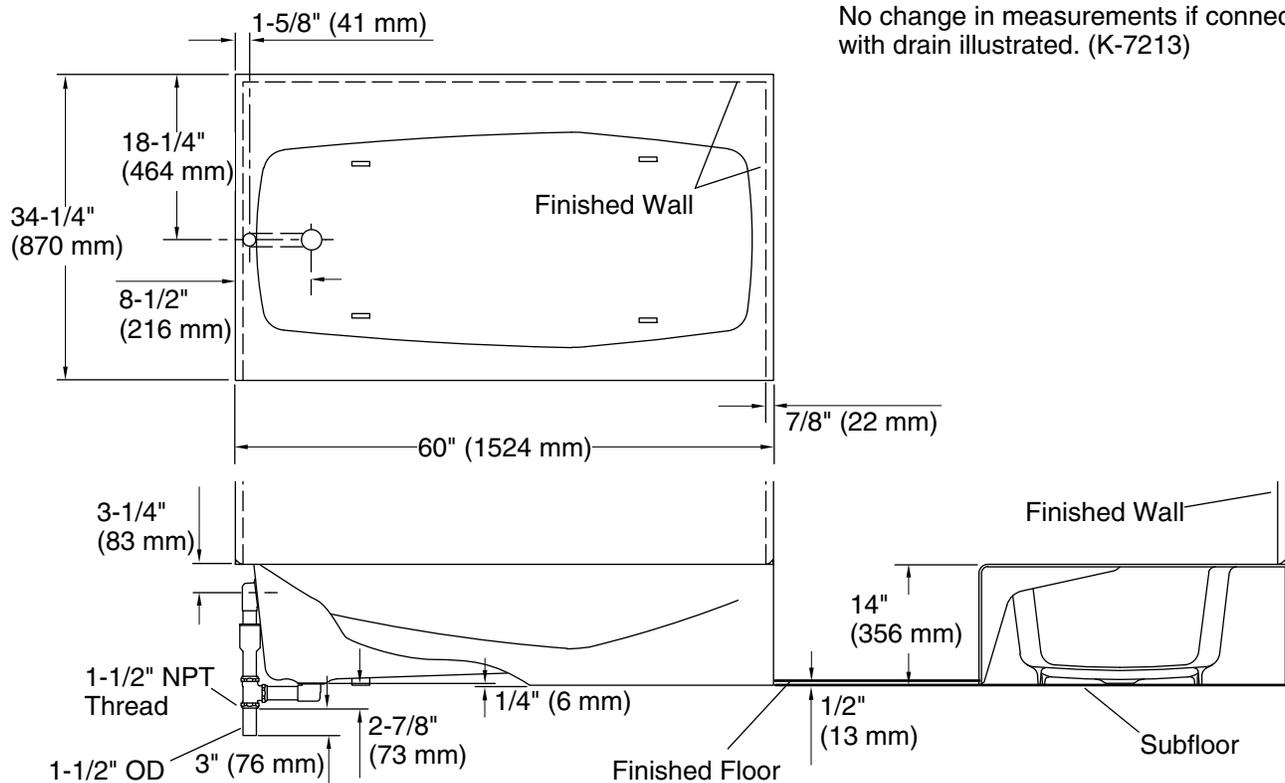

Product Diagram