


Installation & Assembly

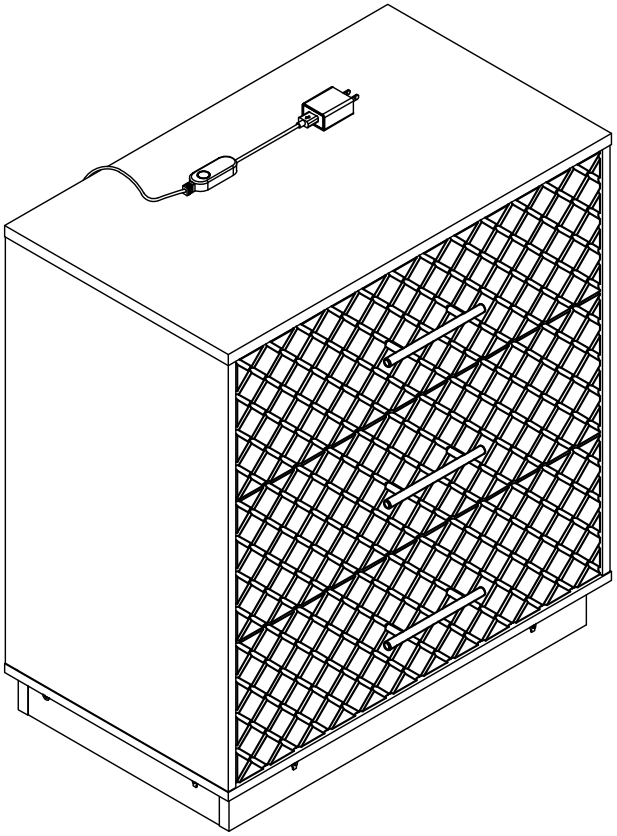


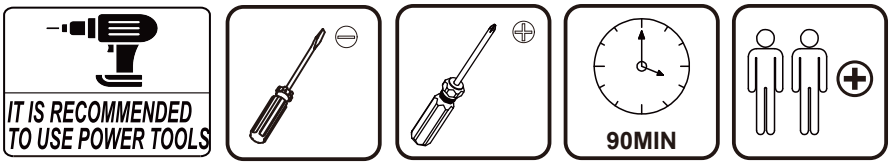


***EN*_IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY.**

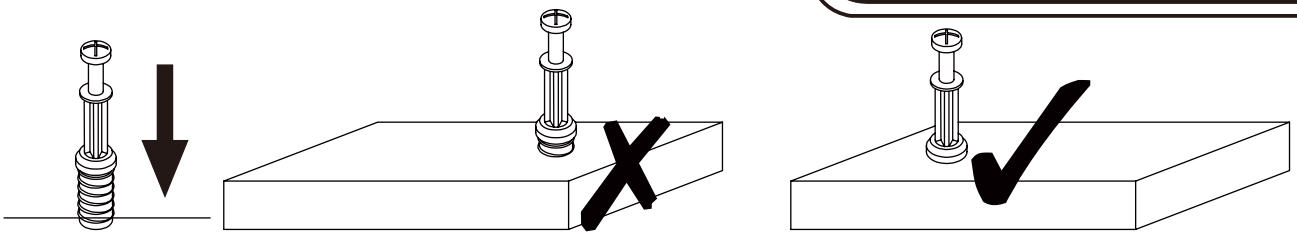


EN_QUICKFIT: Tighten quickfit until shoulder is flush with panel.Do not overtighten or undertighten.

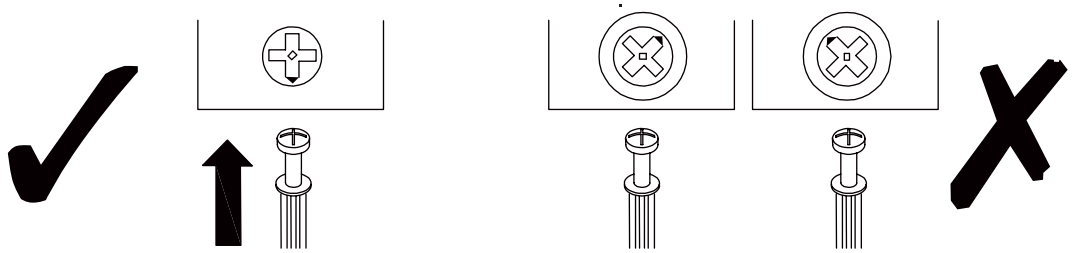











EN_CAM LOCK: When fitting cam lock, ensure starting position is correct before you insert connecting quickfit.







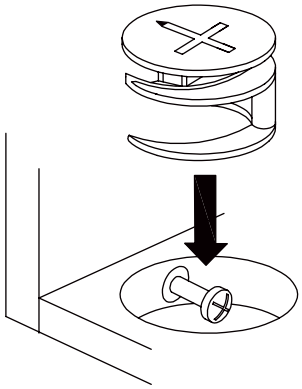



EN_ Quickfit head should be in the centre of the cam lock when the two panels are joined.
Cam lock should be inserted before quickfit.

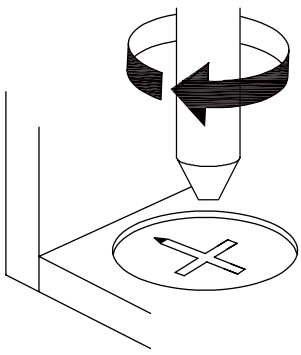

EN_ Turn cam lock clockwise to tighten.

NO.	PARTS	QTY	SPARE
1		x1	
2		x1	
3		x1	
4		x3	
5		x1	
6		x2	
7		x1	
8		x1	
9		x1	
10		x1	

NO.	PARTS	QTY	SPARE
11		x1	
12		x3	
13		x3	
14		x3	
15		x3	
16		x3	
	 Hardware Kit		

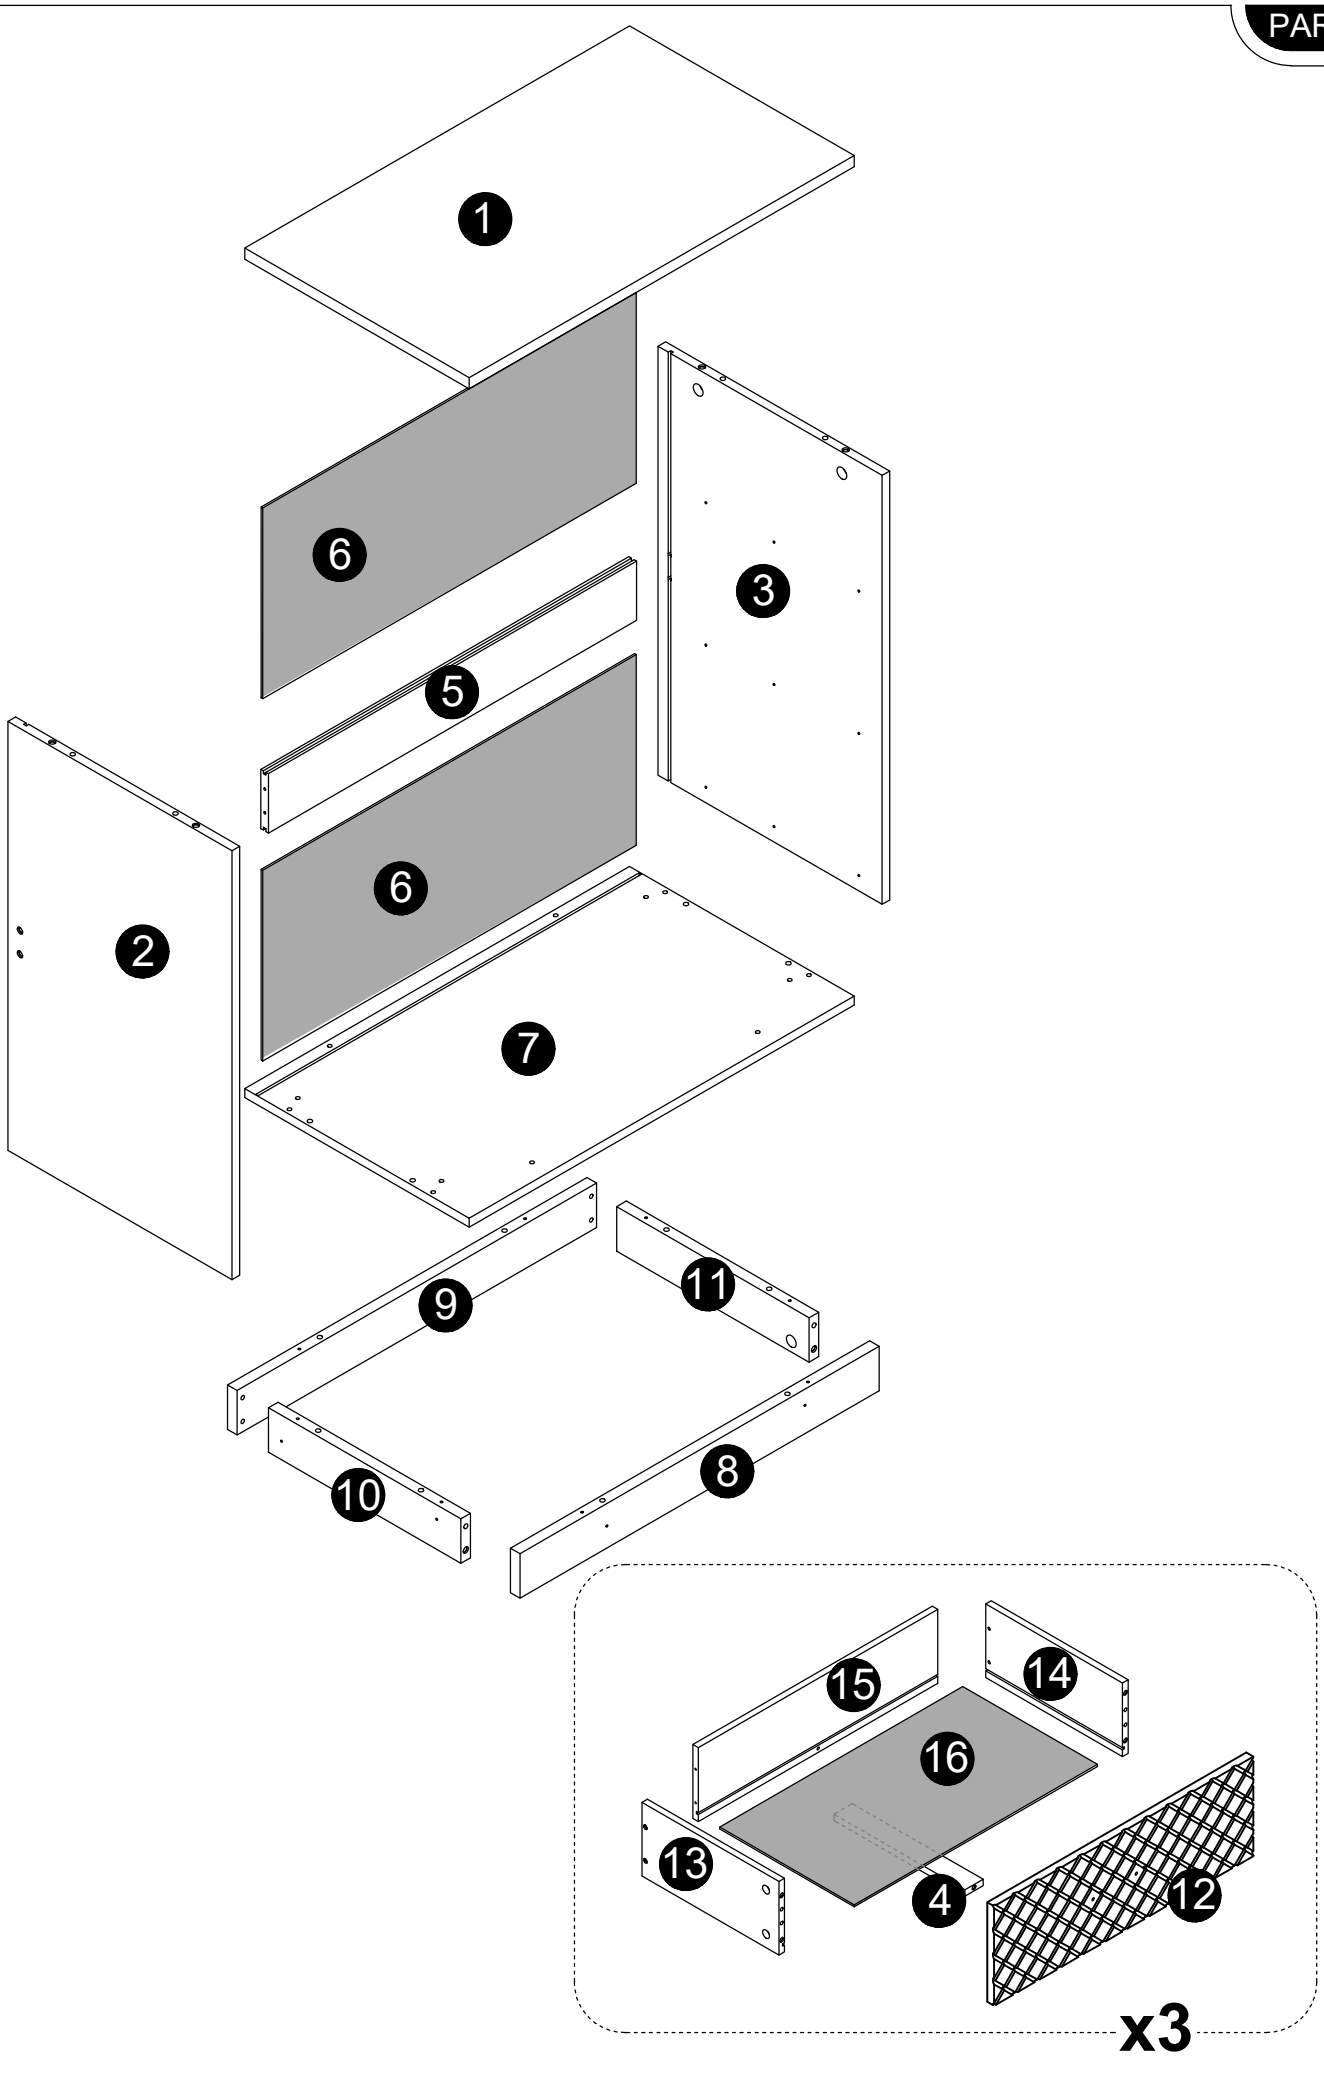
1
6
3
5
2
6
7
9
11
10
8
15
14
16
13
4
12
x3


HARDWARE


A x21 Ø6x35mm +2(spare)	B x21 Ø15x10mm +2(spare)	C x30 Ø6x30mm +2(spare)	D x29 Ø4x35mm +3(spare)	E x36 Ø3.5x12mm +3(spare)	F x3
G x10 Ø3x16mm +1(spare) G1 G2	H x1	I x8 Ø15mm +2(spare)	J x3 Ø4x14mm	K x2	L x2 Ø6x30mm
M x1	N x5 Ø3x12mm +1(spare)	O x1	P x8 Ø4x30mm +1(spare)	Q x1	CL x3 300mm
CR x3 300mm	DL x3 300mm	DR x3 300mm			

01

x3


A x15	C x12	D x15

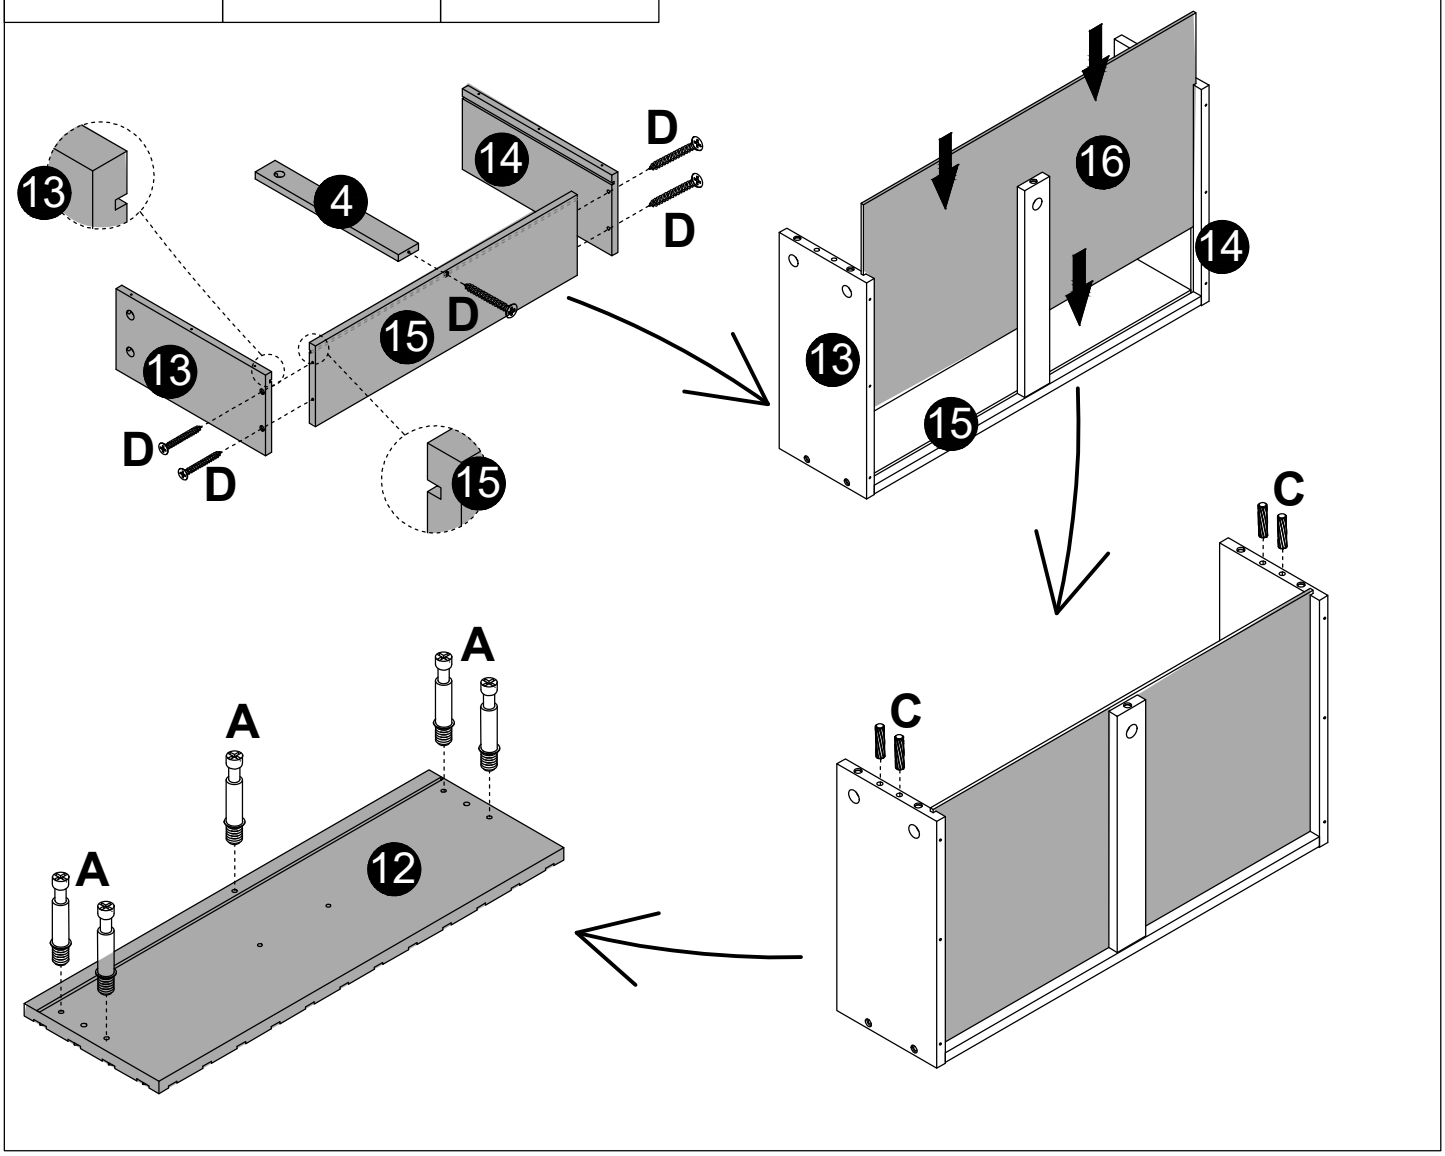


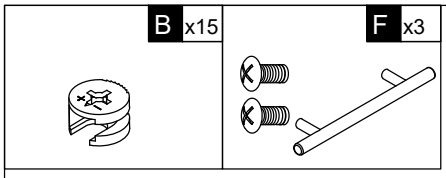

x3


02

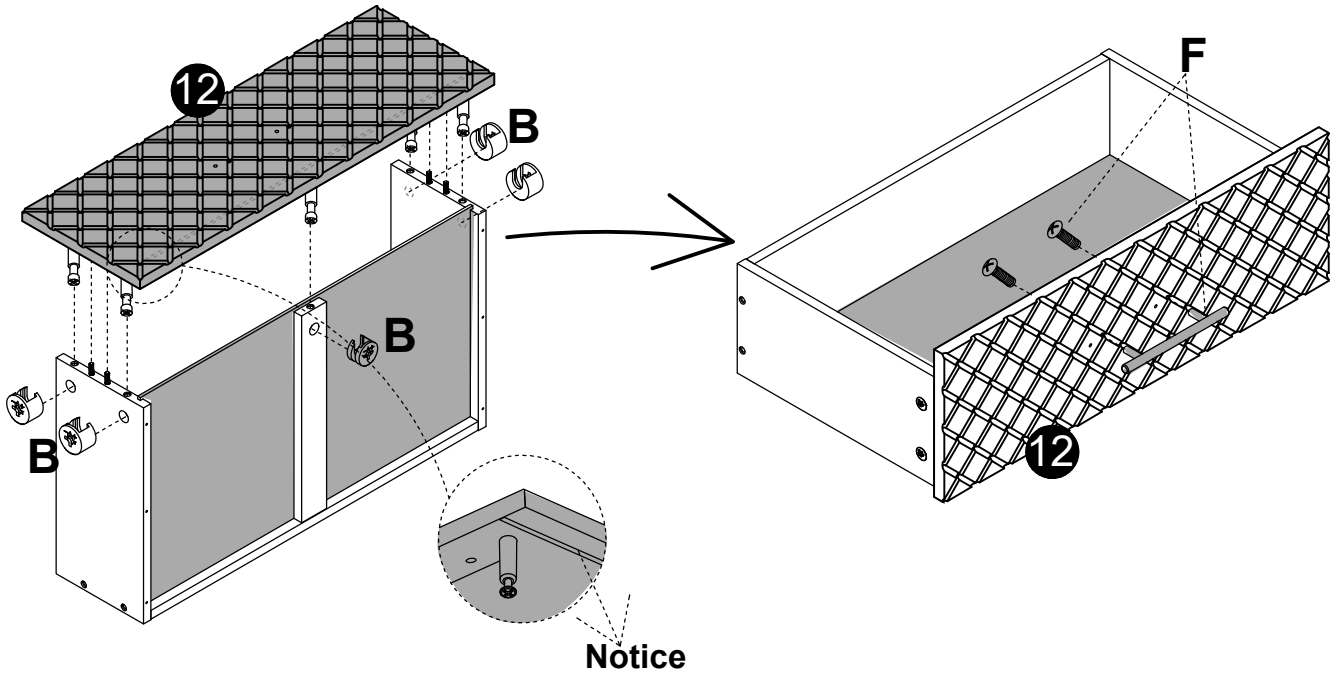


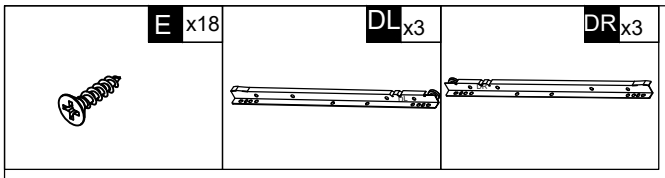


x3

03

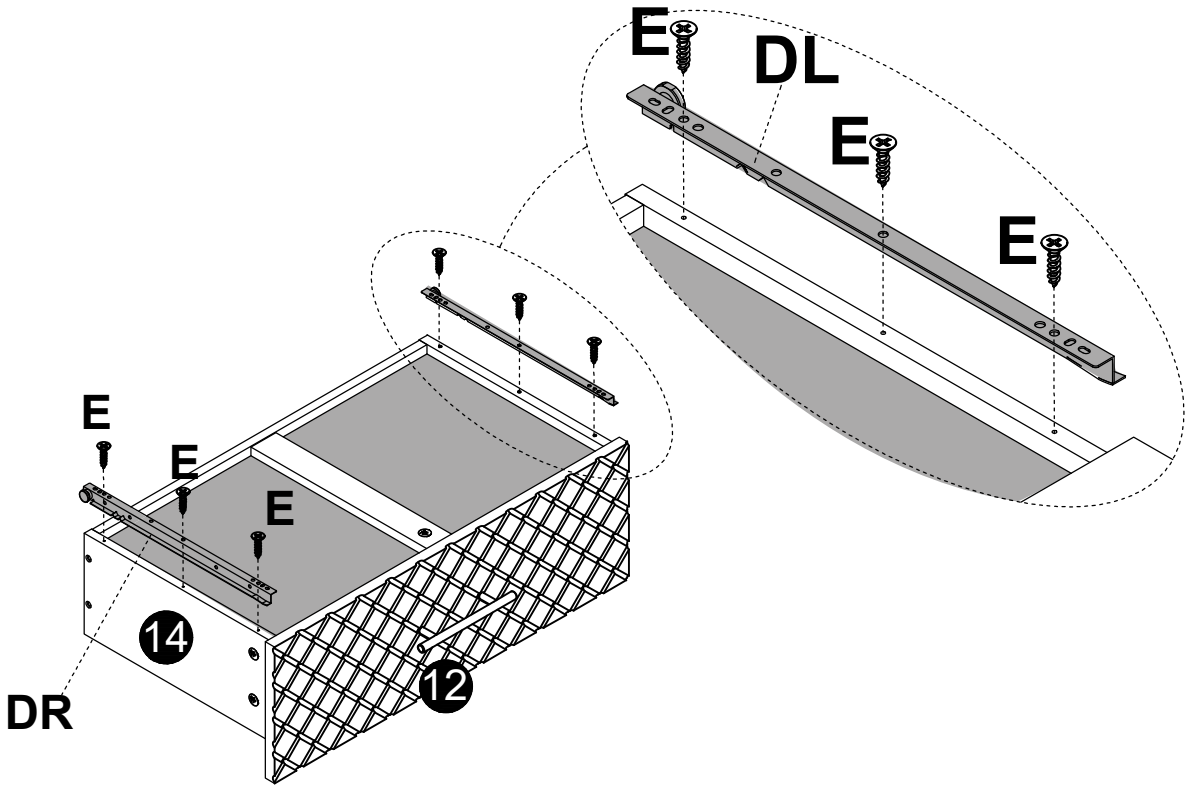

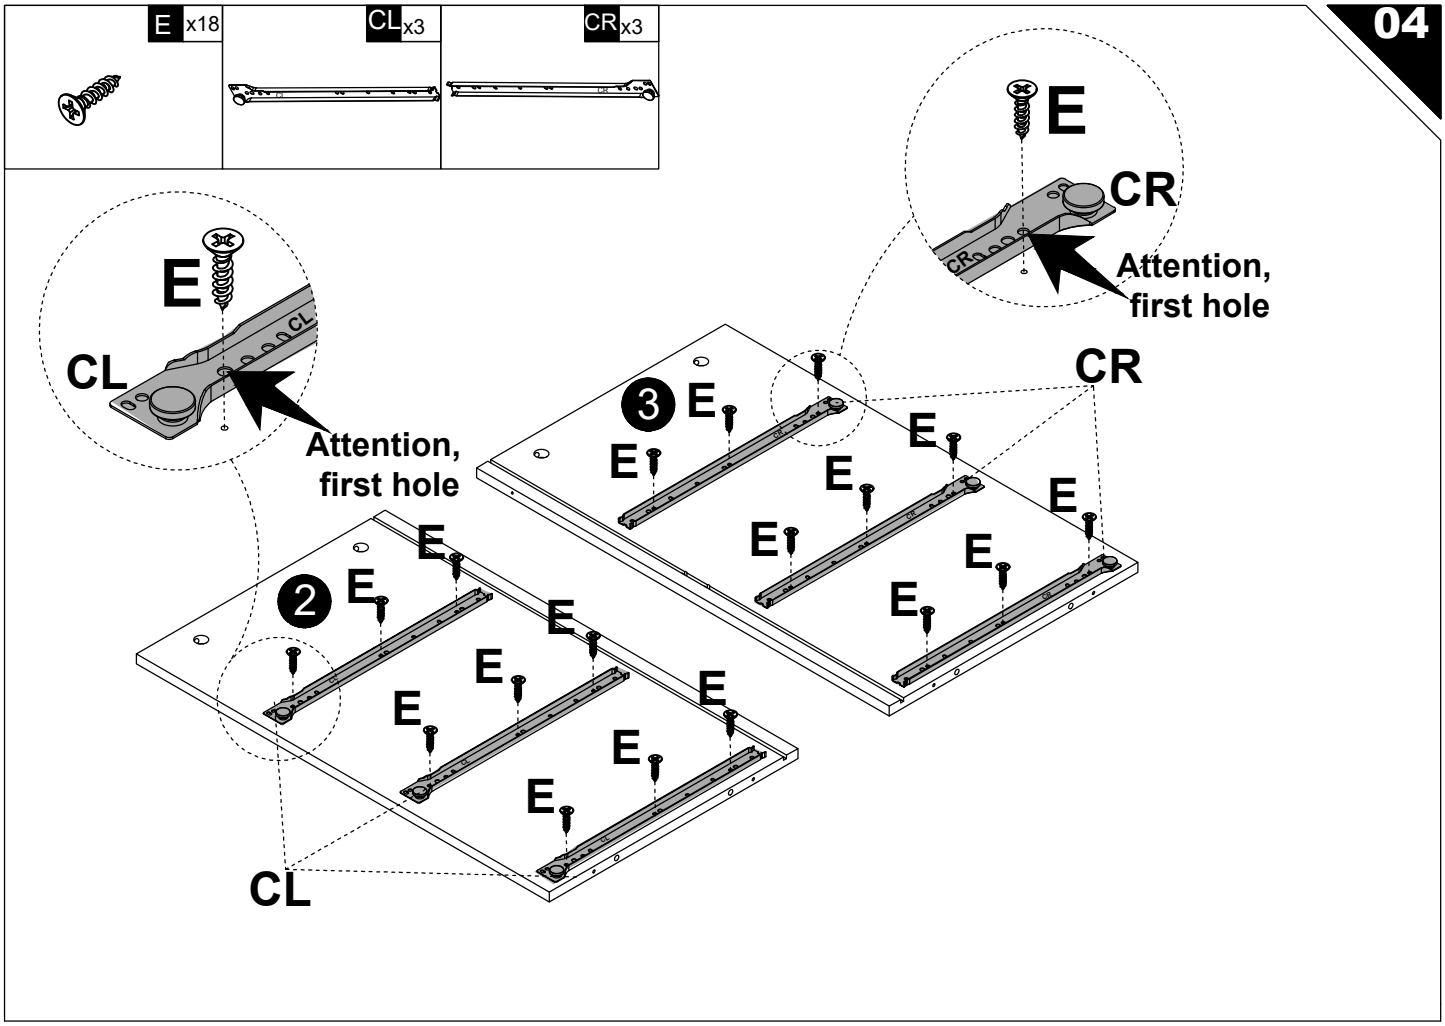
04
E x18
CL x3
CR x3
E
CR
Attention,
first hole
E
CL
Attention,
first hole
CR
3
2
CL

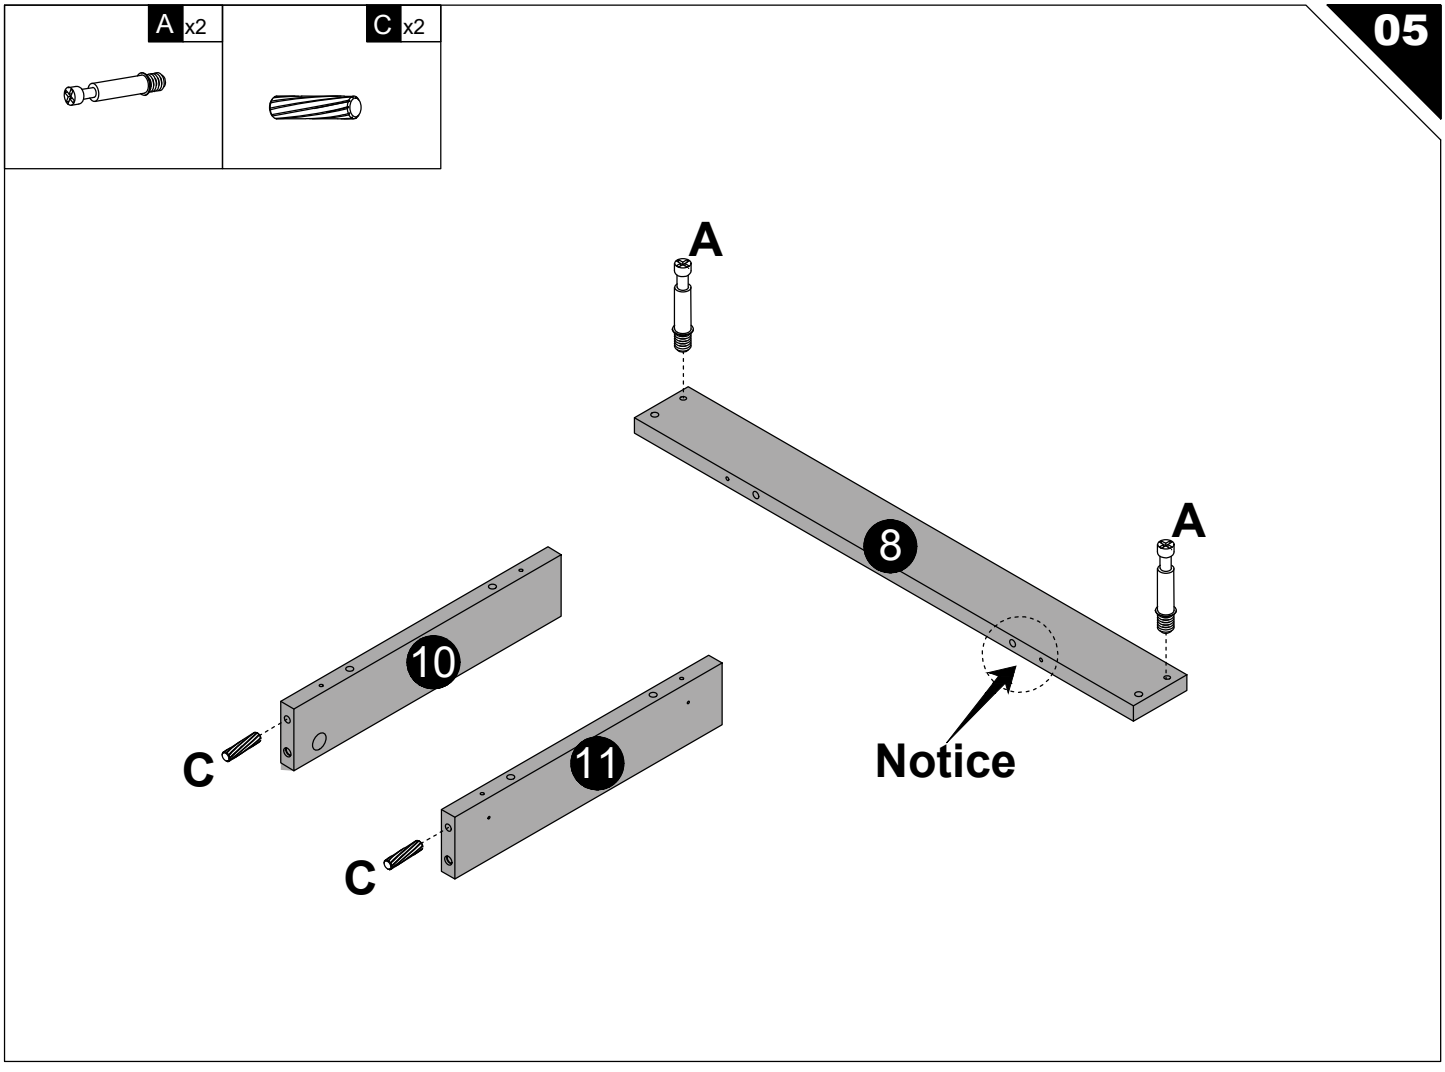
05
A x2
C x2
A
8
A
10
C
11
C
Notice

06

B x2




C x8




D x4




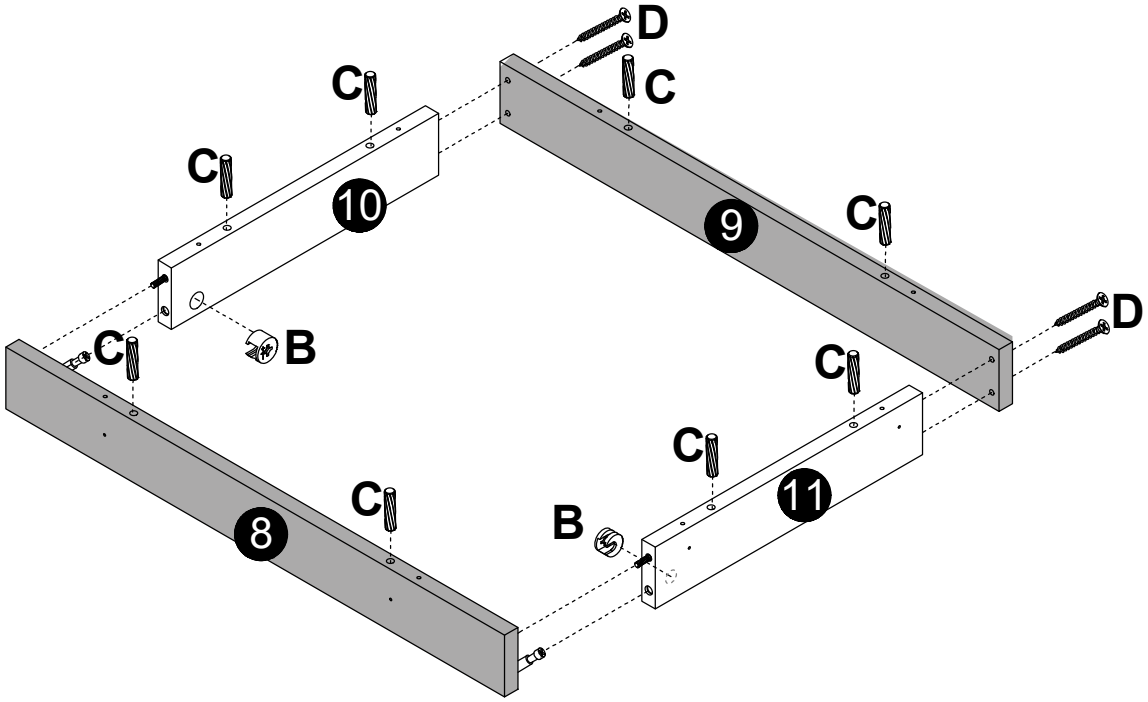

07

P x8



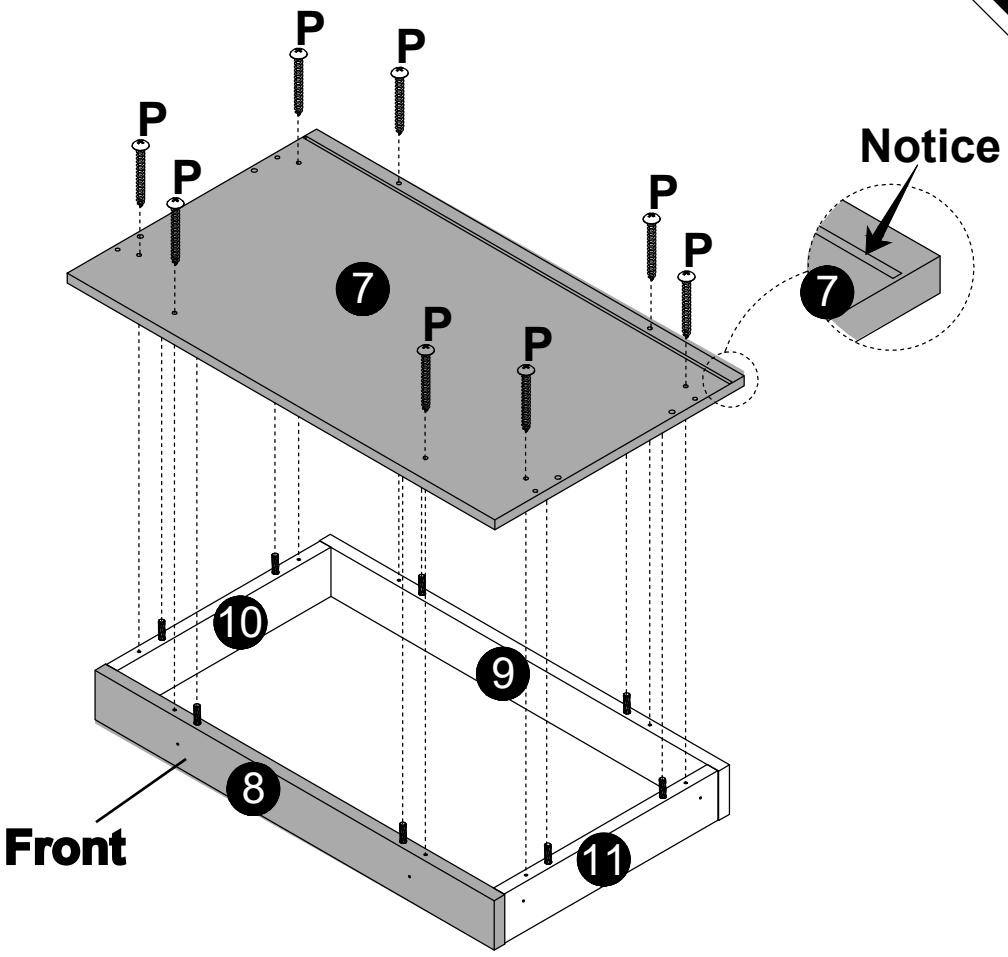



C x4




D x4



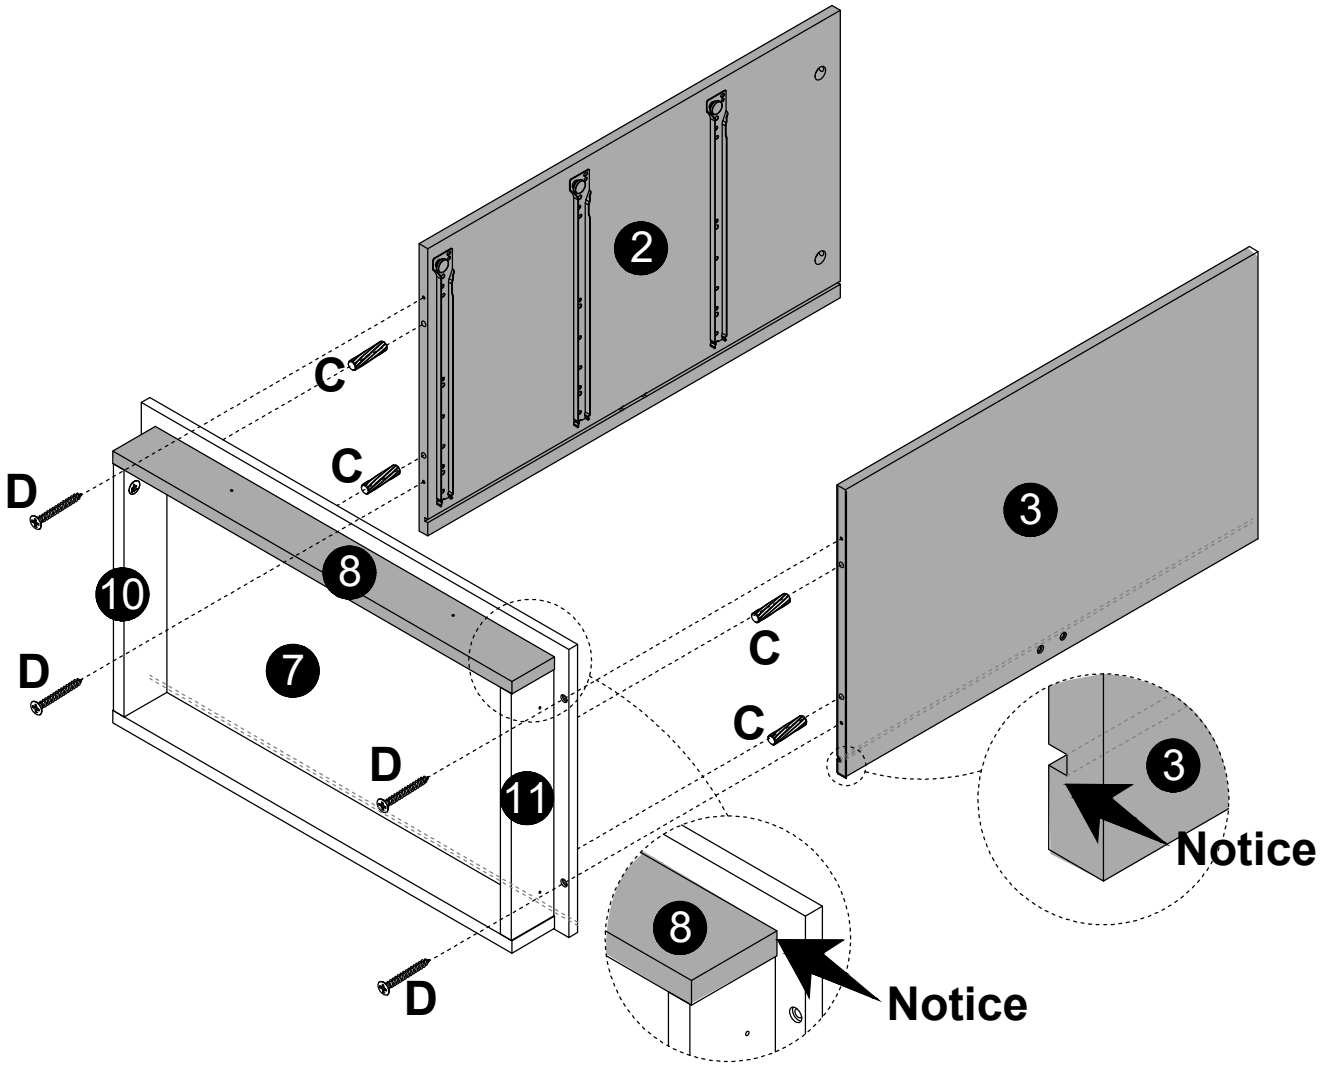


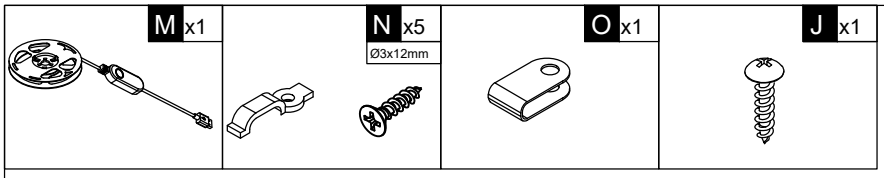


(1) Please unfold the light strip (M) and peel off a small piece of protective film on the back of the light strip M at the right end, as shown in the picture

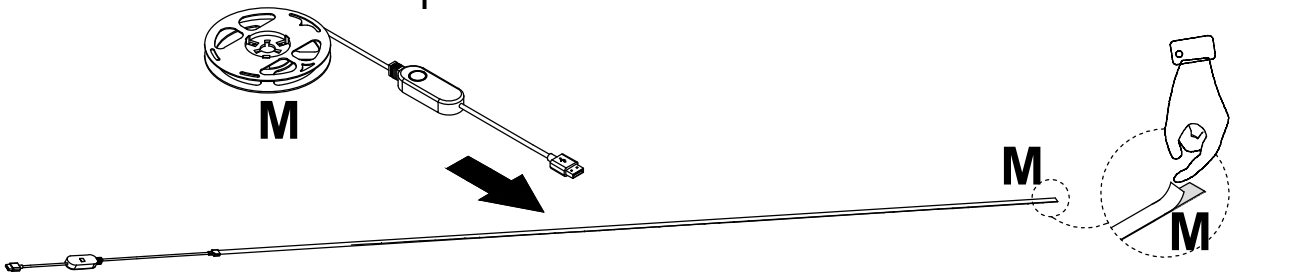


(2) Then please pull the light strip M from the bottom of board 11 according to the arrow direction as shown in the figure, tear off the adhesive on the back of the light and stick the light strip M to board 8, and finally to board 10, as shown in the figure

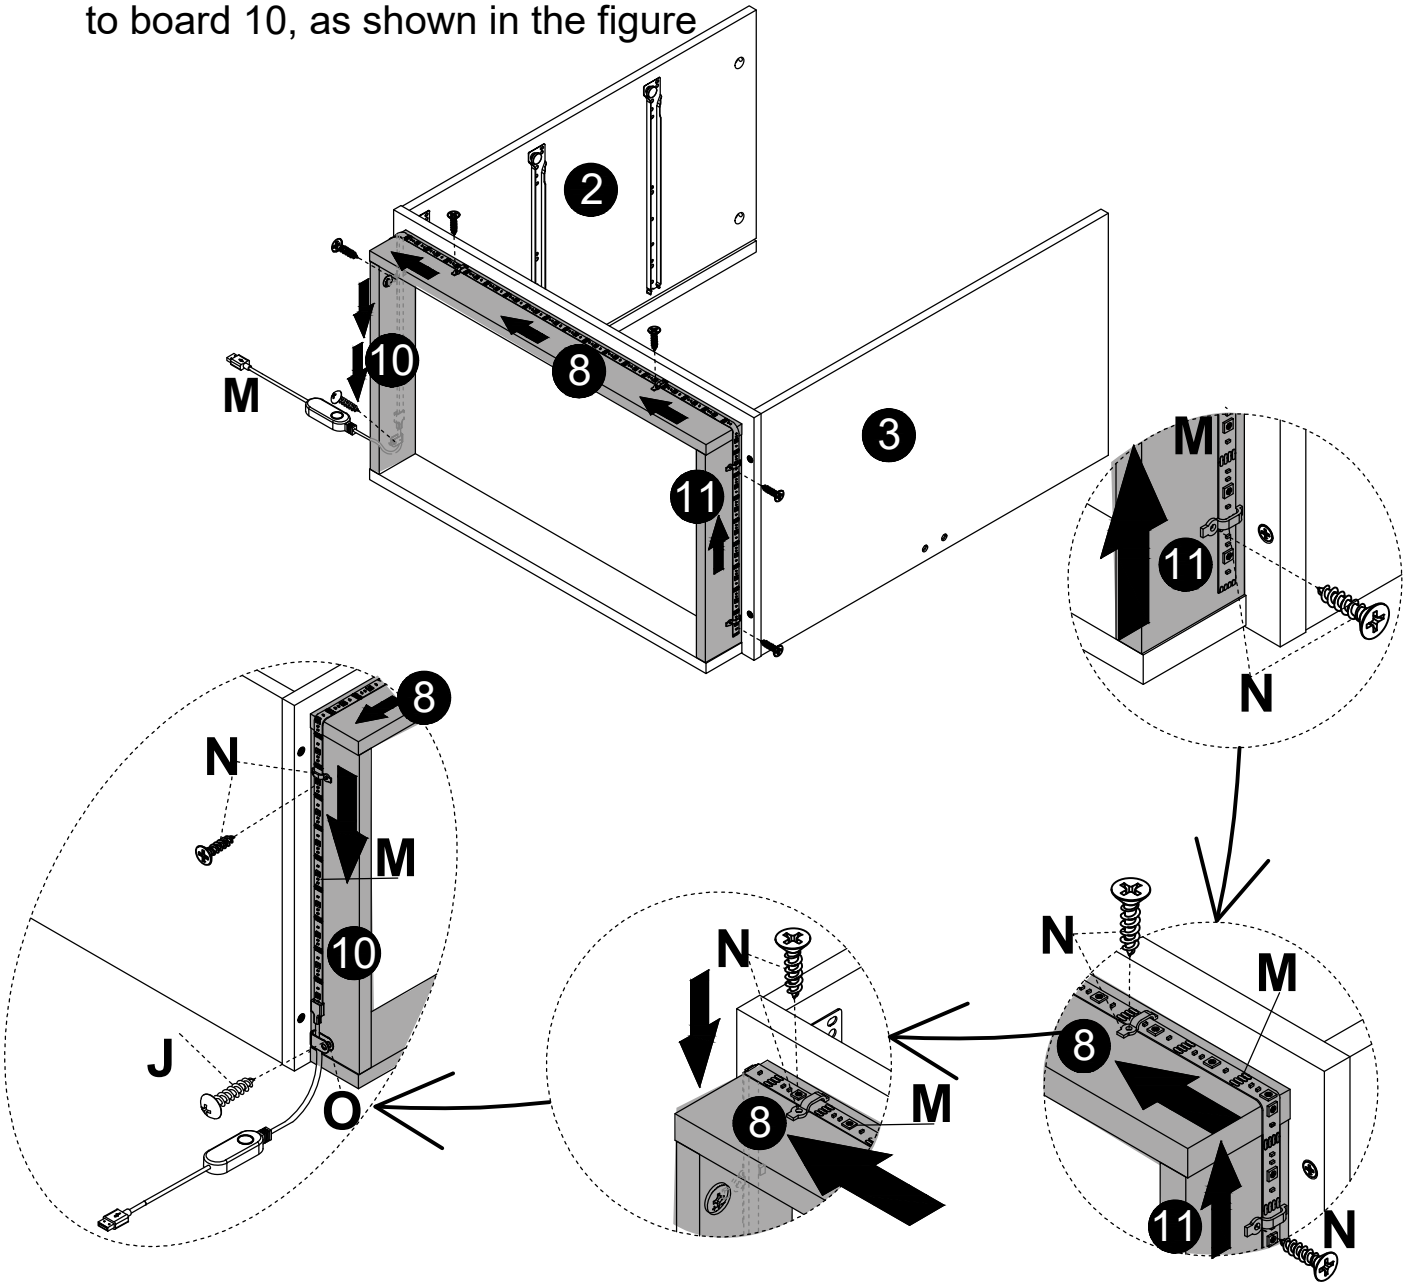

C x4




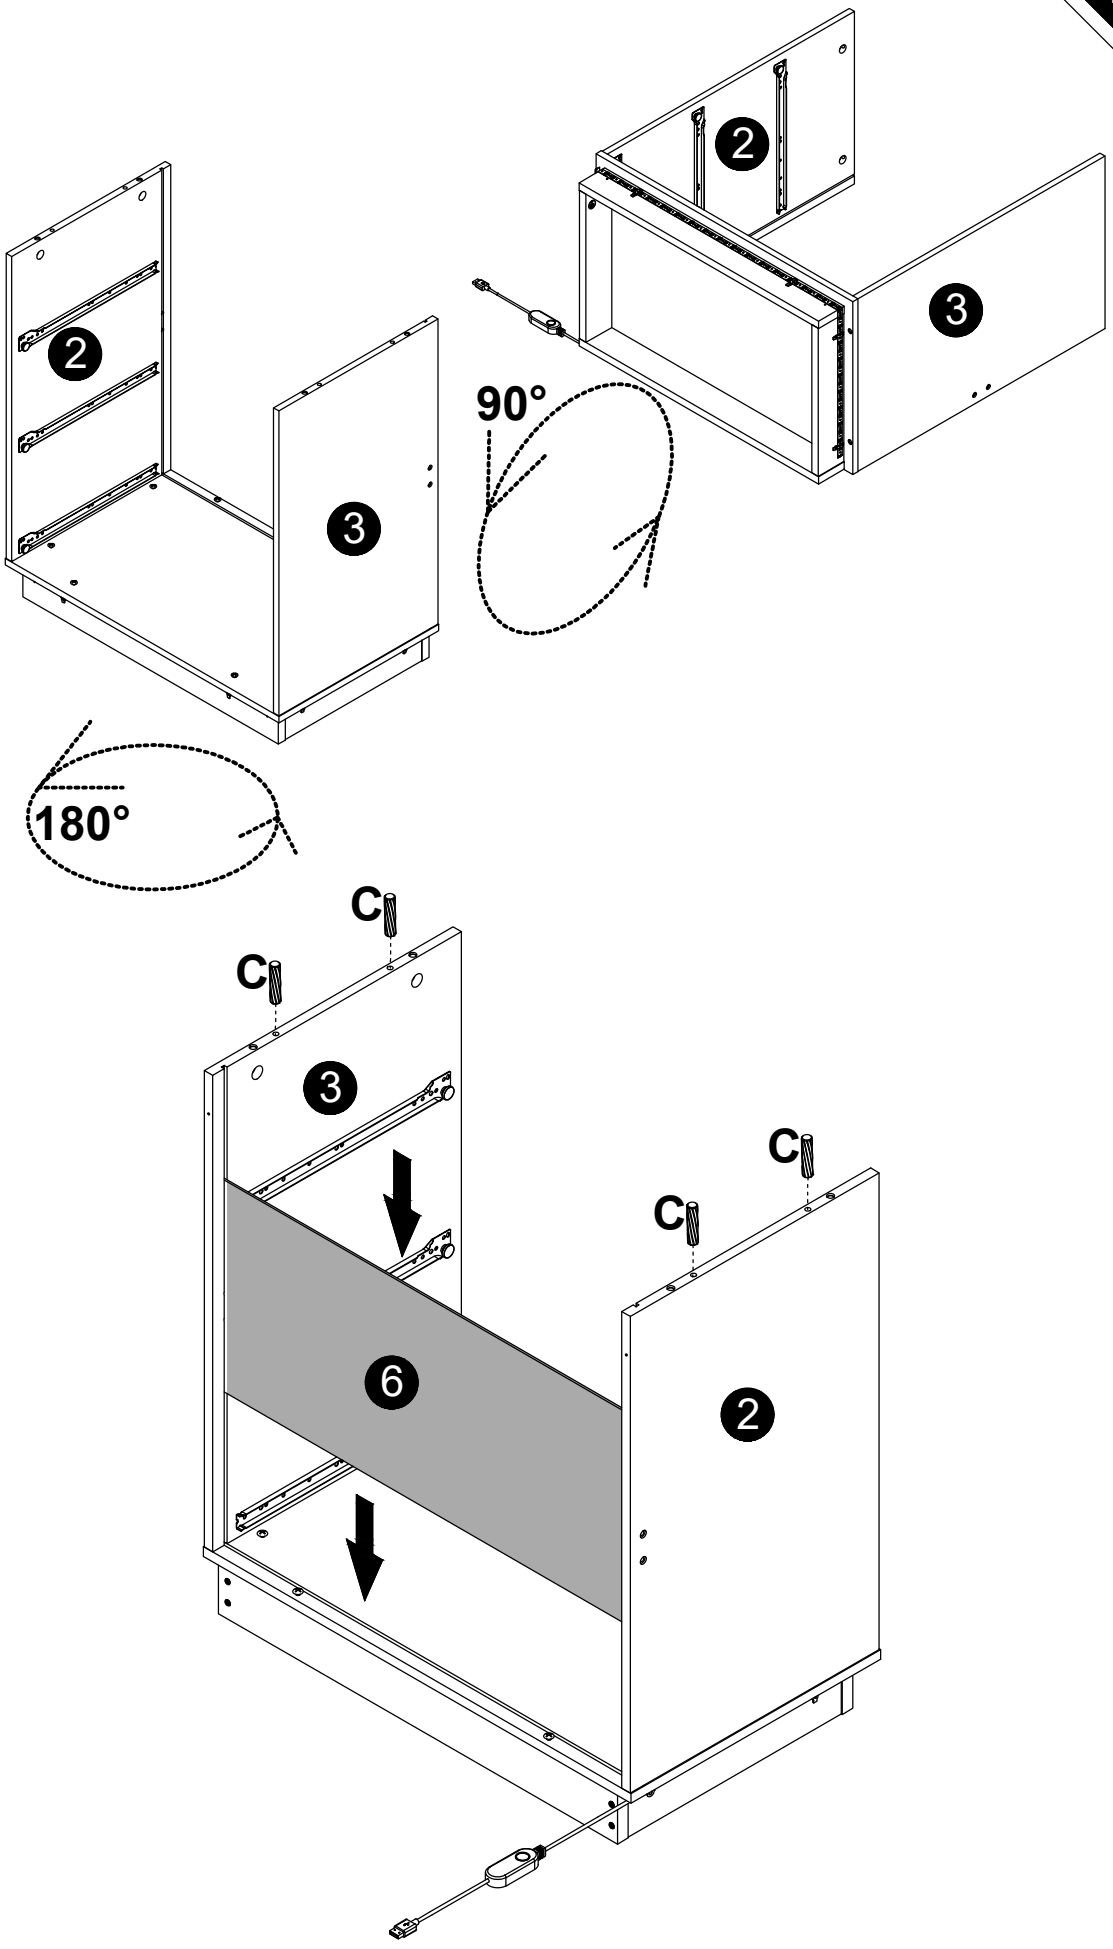

11

D x4




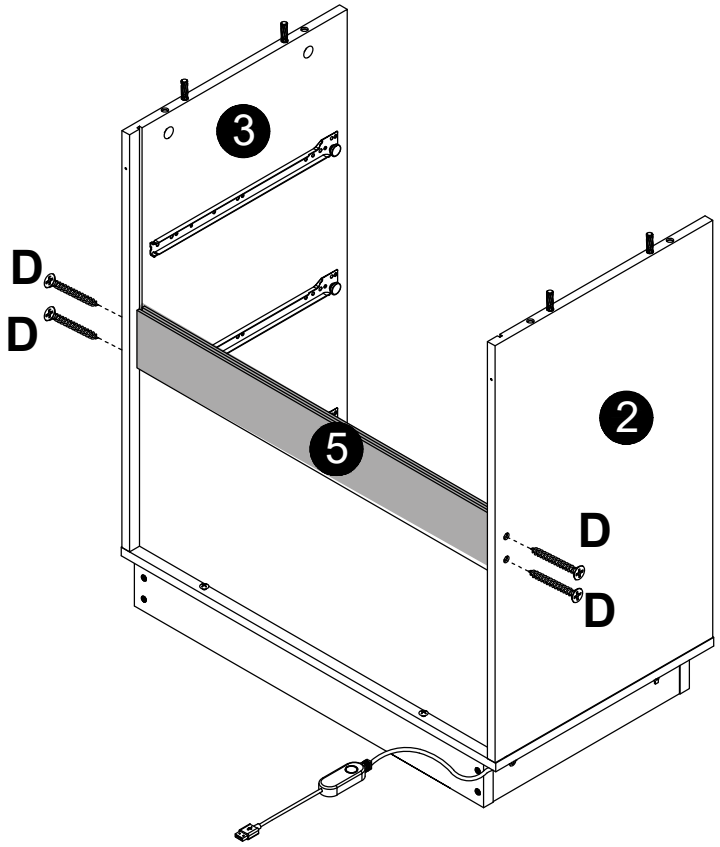



12


I x8




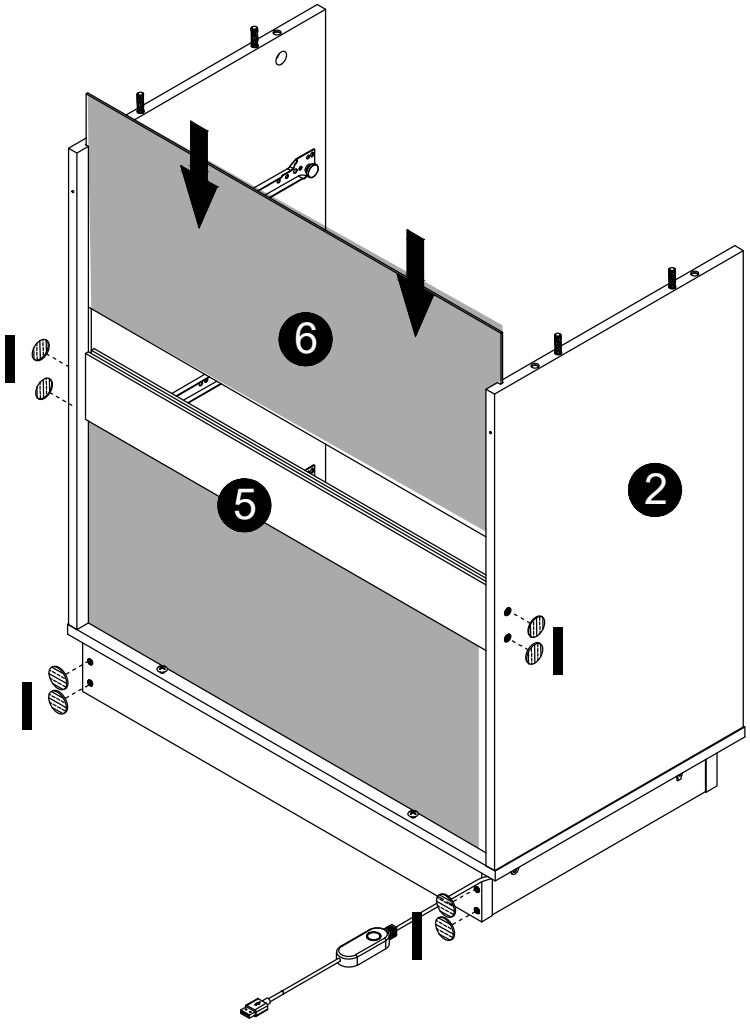

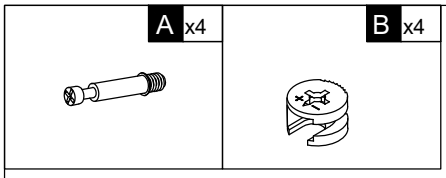

A x4
B x4

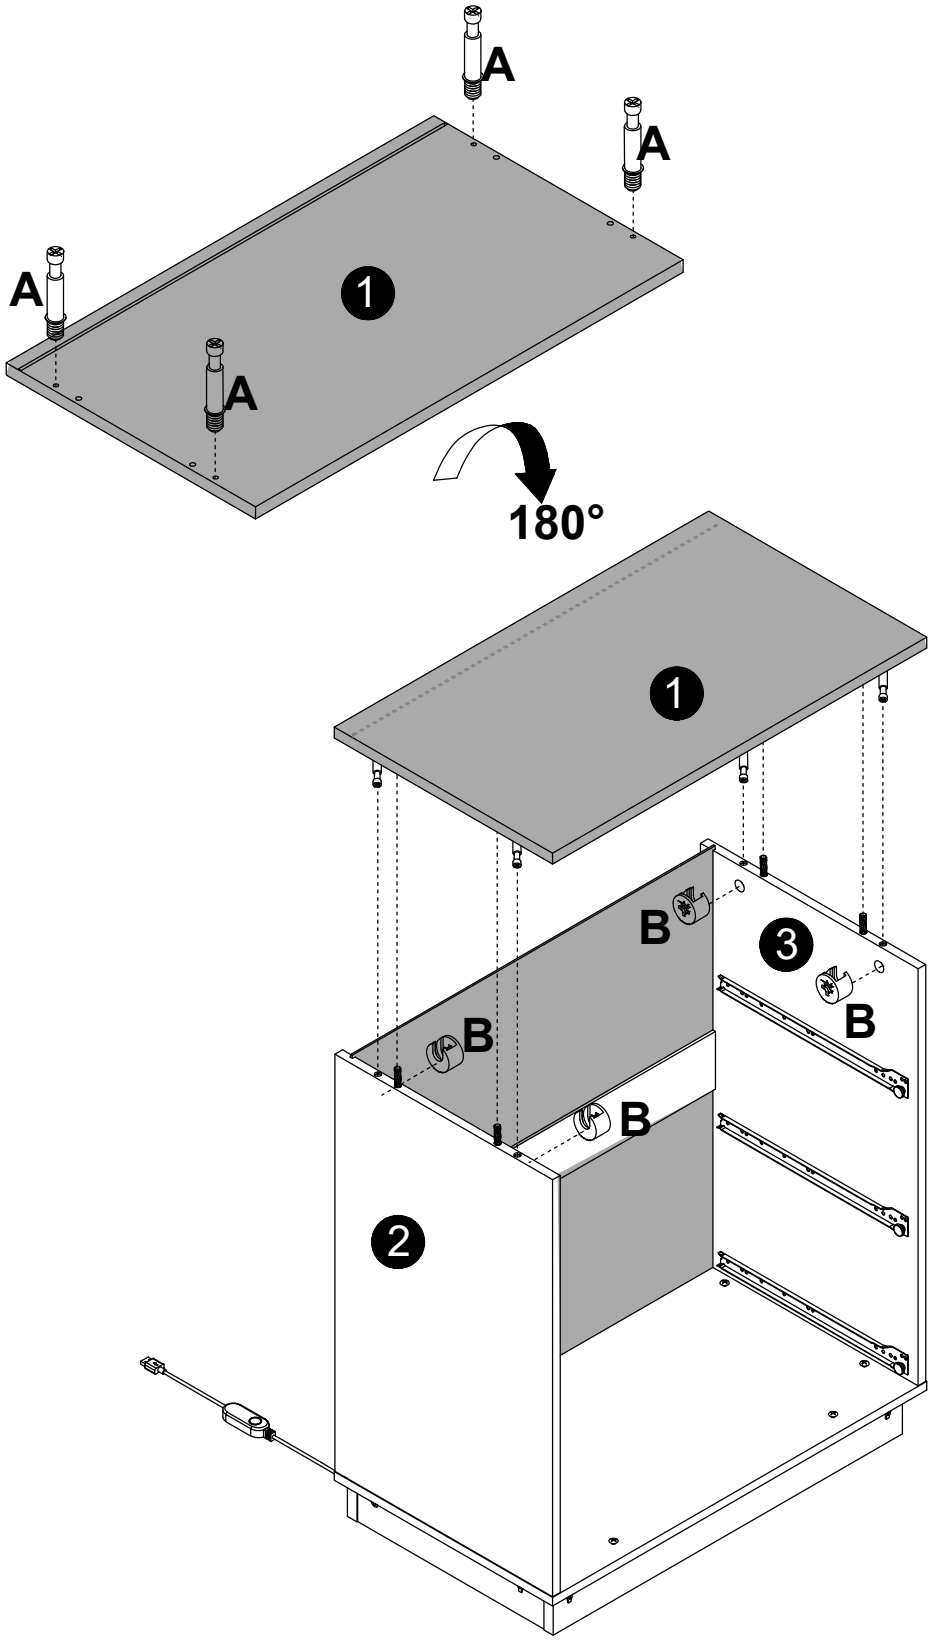

A
A
A
A
1
180°
1
B
B
B
3
B
2

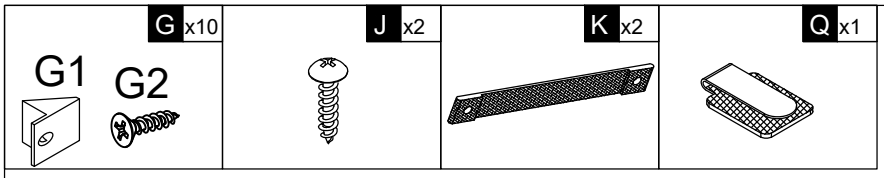
G x10
G1
G2
J x2
K x2
Q x1

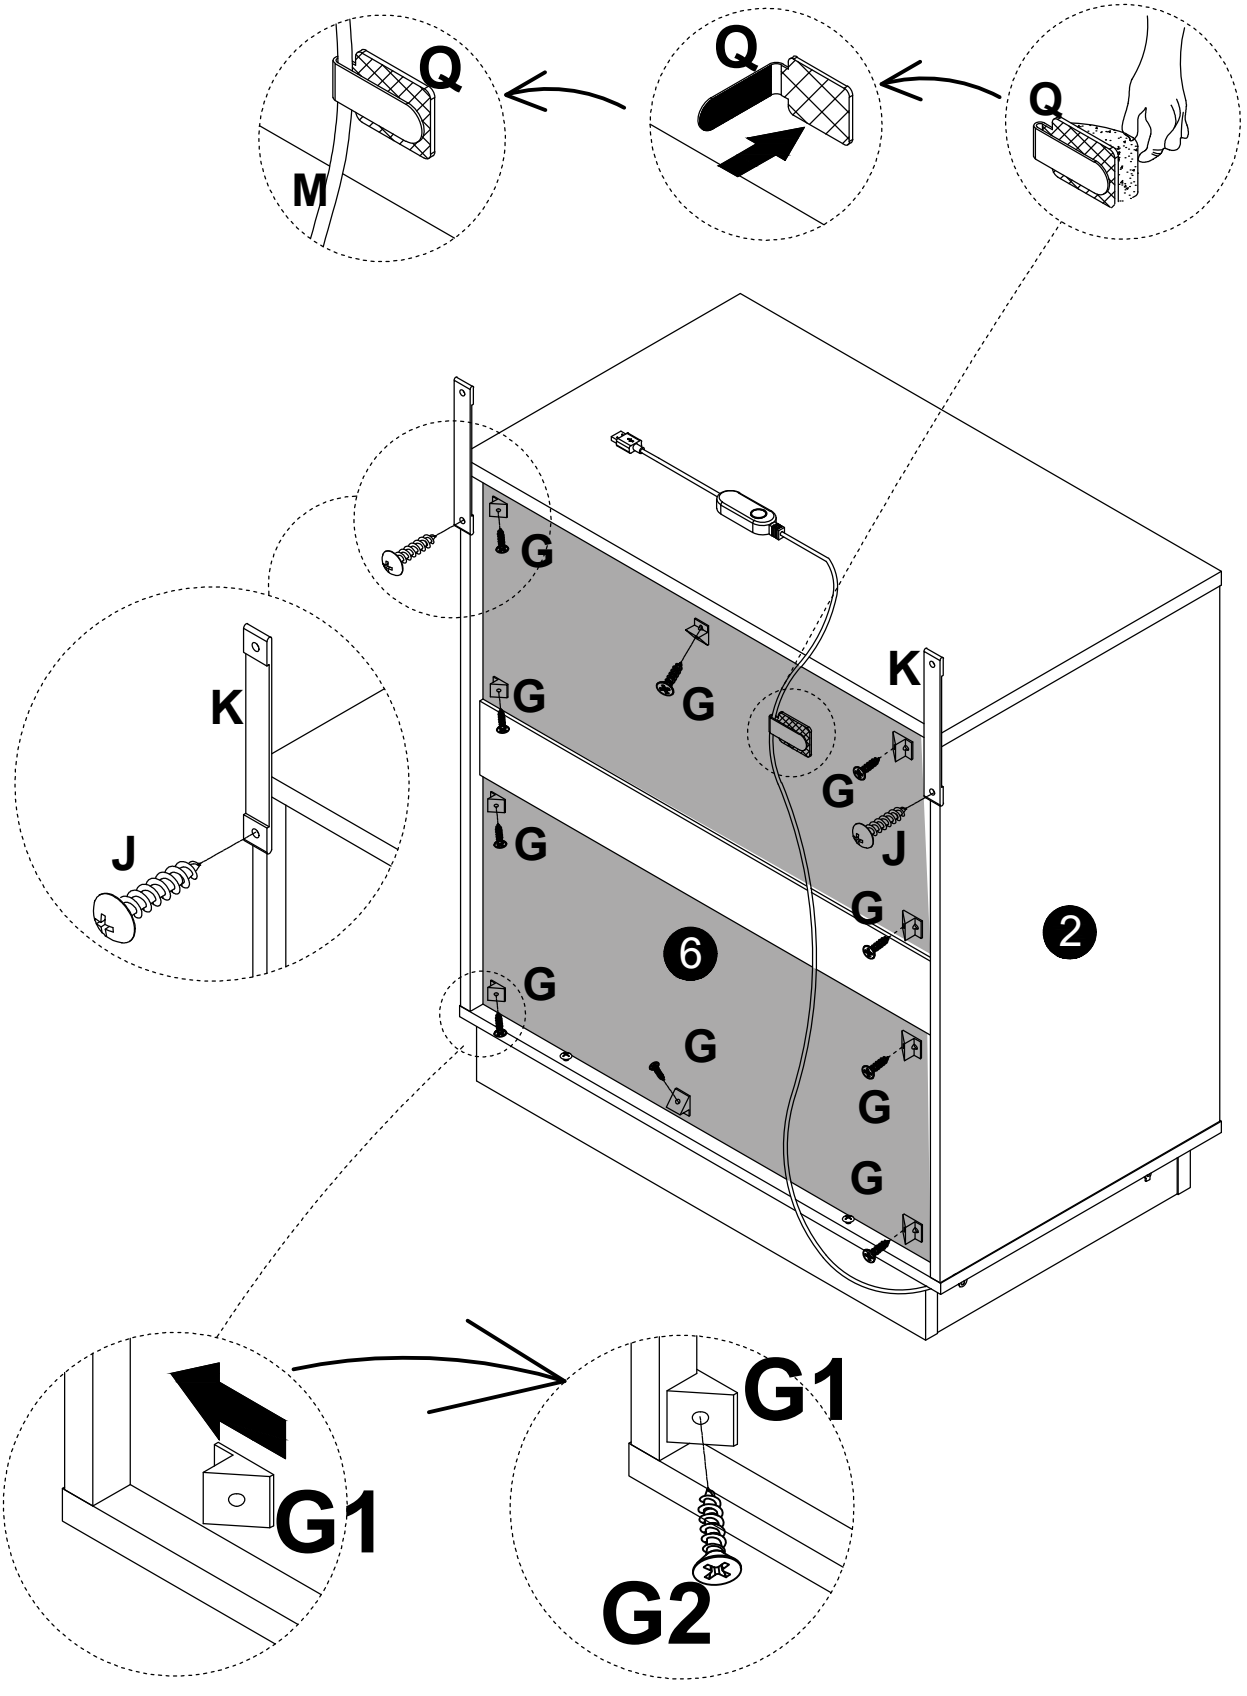

Q
M
Q
Q
G
G
G
G
G
G
K
K
J
J
6
2
G
G
G
G
G1
G1
G2

(1)

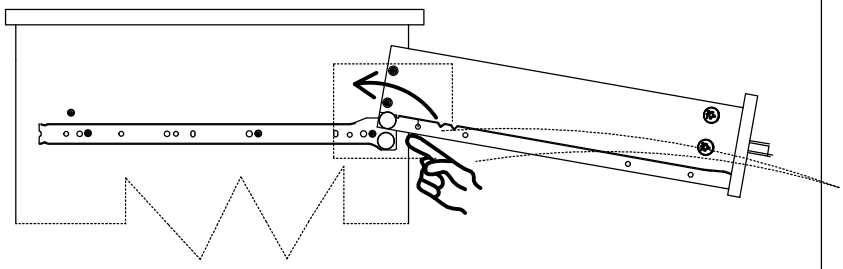


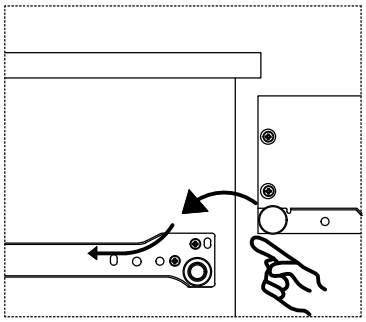



(2)

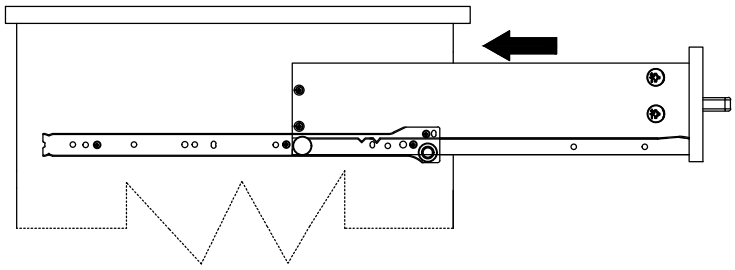


x3

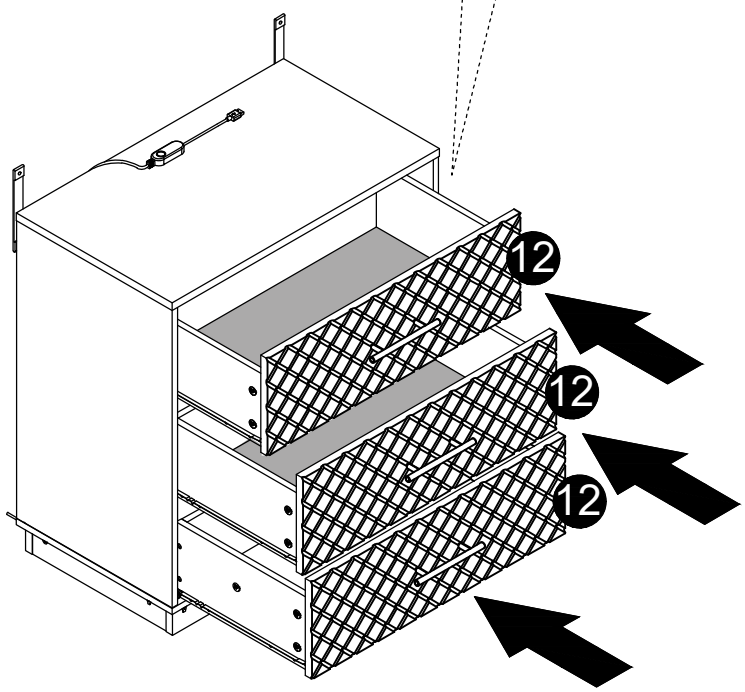

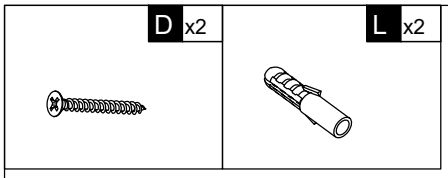





First, use a ruler to measure the approximate height of the product on the wall, and then mark it witha pen.




Then use a tape drill to make holes in the wall that are suitable for the product screws.



Then,put the expansion bolt into the hole




Finally,pass the matching screws throughthe "anti-rewind" and tighten themto fix them on the wall.

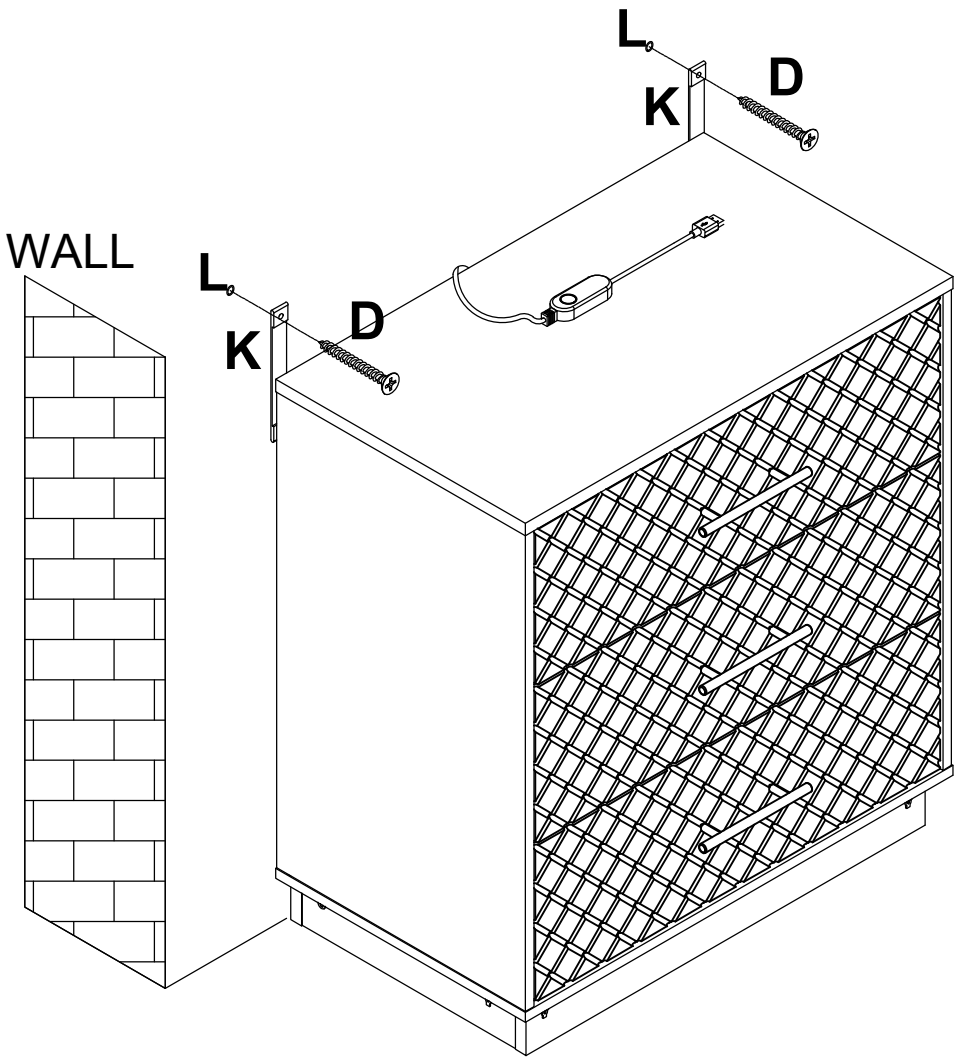

H x1



Done

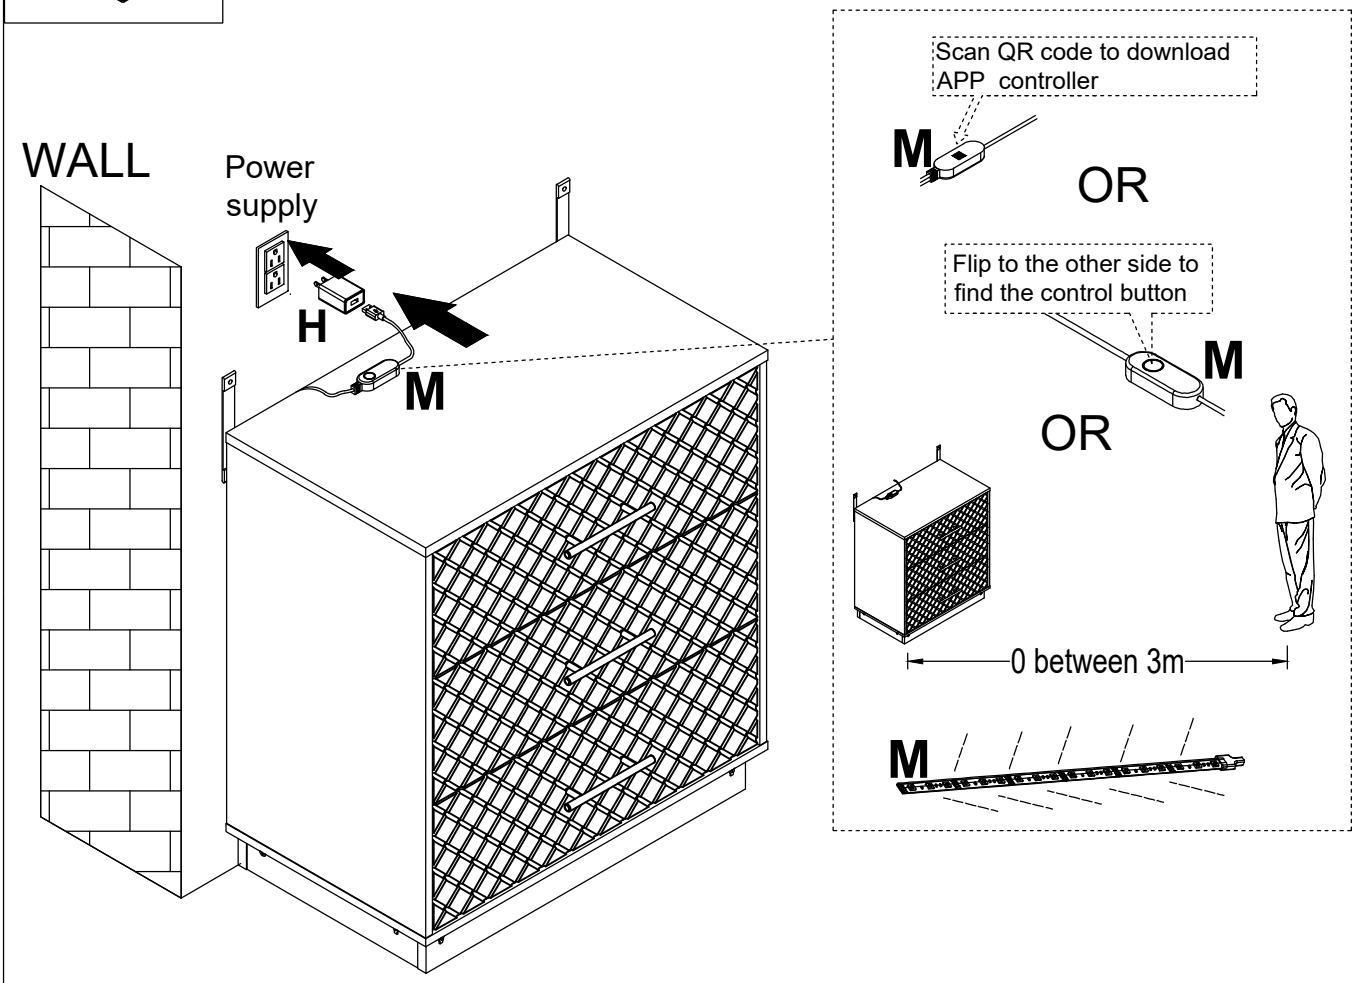



Short Press:

1. **Cycle through seven static colors:** The light cycles through seven predefined static colors.
2. **Three-color jump mode:** The light dynamically jumps between three specific colors.
3. **Sound control mode:** The light responds to sound input, changing colors or patterns.
4. **Power off:** The light turns off.
5. **Loop:** The sequence repeats in a continuous loop.

Long Press (3 seconds):

1. **First long press (3 seconds):** Activates the radar function (LED flashes once to indicate activation).
2. **Second long press (3 seconds):** Deactivates the radar function (LED flashes three times to indicate deactivation).
3. **Toggle in a loop:** Each long press toggles between activating and deactivating the radar function.

Radar Function:

1. **Automatic turn-off:** If a person moves away and no motion is detected for 60 seconds, the light automatically turns off.
2. **Automatic turn-on:** When a person comes within a 3-meter range, the light automatically turns on via motion detection.

This functionality provides a versatile and user-friendly lighting system with both manual and automatic control options.