


Features

- Acrylic
- Bask™ heated lumbar support with three temperature settings
- 6 individually adjustable ProFlex® hydro-massage jets
- Molded lumbar support and armrests for comfort
- Textured bottom surface
- Integral tile flange [K-1257-LW and K-1257-RW]
- Drop-in installation [K-1257-W1] or 3-wall alcove installation [K-1257-LW and K-1257-RW]
- Reversible drain [K-1257-W1] or left/right drain [K-1257-LW and K-1257-RW]
- 72" (1829 mm) x 36" (914 mm) x 20" (508 mm) - Drop-in models
- 72" (1829 mm) x 36" (914 mm) x 21-1/4" (540 mm) - Integral flange models

6' BATH WHIRLPOOL WITH BASK™

K-1257-W1

ALSO K-1257-LW, K-1257-RW

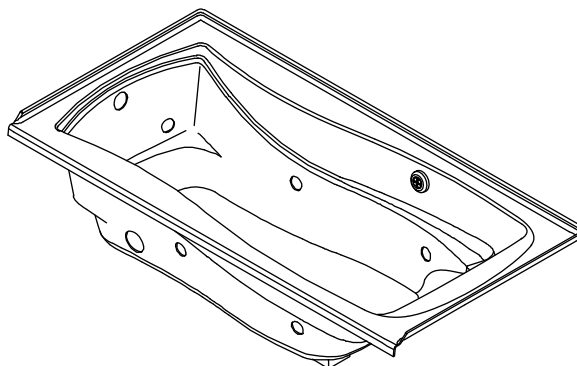

Codes/Standards Applicable

Specified model meets or exceeds the following:

- UL 1795
- ASTM E162
- ASTM E662
- ASME A112.19.7/CSA B45.10
- CSA B45.11/IAPMO Z401

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes
- CP: Polished Chrome
- PB: Vibrant® Polished Brass

Specified Model

Model	Description	Colors/Finishes	
K-1257-W1	6' Bath whirlpool with Bask – drop-in	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1257-LW	6' Bath whirlpool with Bask – 3-side integral flange, left drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1257-RW	6' Bath whirlpool with Bask – 3-side integral flange, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories

K-7166-AF	Adjustable pop-up drain – above or through-the-floor installation	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
-----------	---	-----------------------------	-----------------------------	-------------------------------------

Optional Accessories

K-1283	Removable apron	<input type="checkbox"/> 0			<input type="checkbox"/> Other_____
K-1491	Removable bath pillow	<input type="checkbox"/> 0			<input type="checkbox"/> Other_____
K-9696	Jet trim kit – metal finishes		<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Product Specification

The acrylic bath whirlpool shall be 72" (1829 mm) in length, 36" (914 mm) in width, and 20" (508 mm) in height (drop-in models), or 60" (1524 mm) in length, 36" (914 mm) in width, and 21-1/4" (540 mm) in height (integral flange models). Bath shall feature Bask heated lumbar support with three temperature settings. Bath shall have 6 individually adjustable ProFlex hydro-massage jets. Bath shall feature molded lumbar support and armrests for comfort and textured bottom surface. Bath shall have integral tile flange [K-1257-LW and K-1257-RW]. Bath shall be for drop-in installation [K-1257-W1] or 3-wall alcove installation [K-1257-LW and K-1257-RW]. Bath shall have reversible drain [K-1257-W1] or left/right drain [K-1257-LW and K-1257-RW]. Bath whirlpool shall be Kohler Model K-1257-____-____.

MARIPOSA®

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	50" (1270 mm) x 24" (610 mm)
Basin area, top	65" (1651 mm) x 27" (686 mm)
Weight	116 lbs (52.6 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	72 gal (272.5 L)
* Approximate measurements for comparison only.	

Drop-in cutout	70" (1778 mm) x 34" (864 mm)		
----------------	------------------------------	--	--

	V	Hz	A
1-speed pump	120	60	7
Heated surface	120	60	.5

Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/Control/Heated surface	120 V, 15 A, 60 Hz

Installation Notes

Install this product according to the installation guide.

Floor support under the bath whirlpool must provide for a minimum of 41 lbs/square foot (200 kg/square meter) loading.


If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

The apron must be installed before the finished floor and wall materials are installed.

Locate a GFCI-protected 120 V, 15 A, grounded duplex electrical outlet within 24" (610 mm) of the pump.

No change in measurements if connected with drain illustrated. (K-7166-AF)

■ Recommended Faucet Area

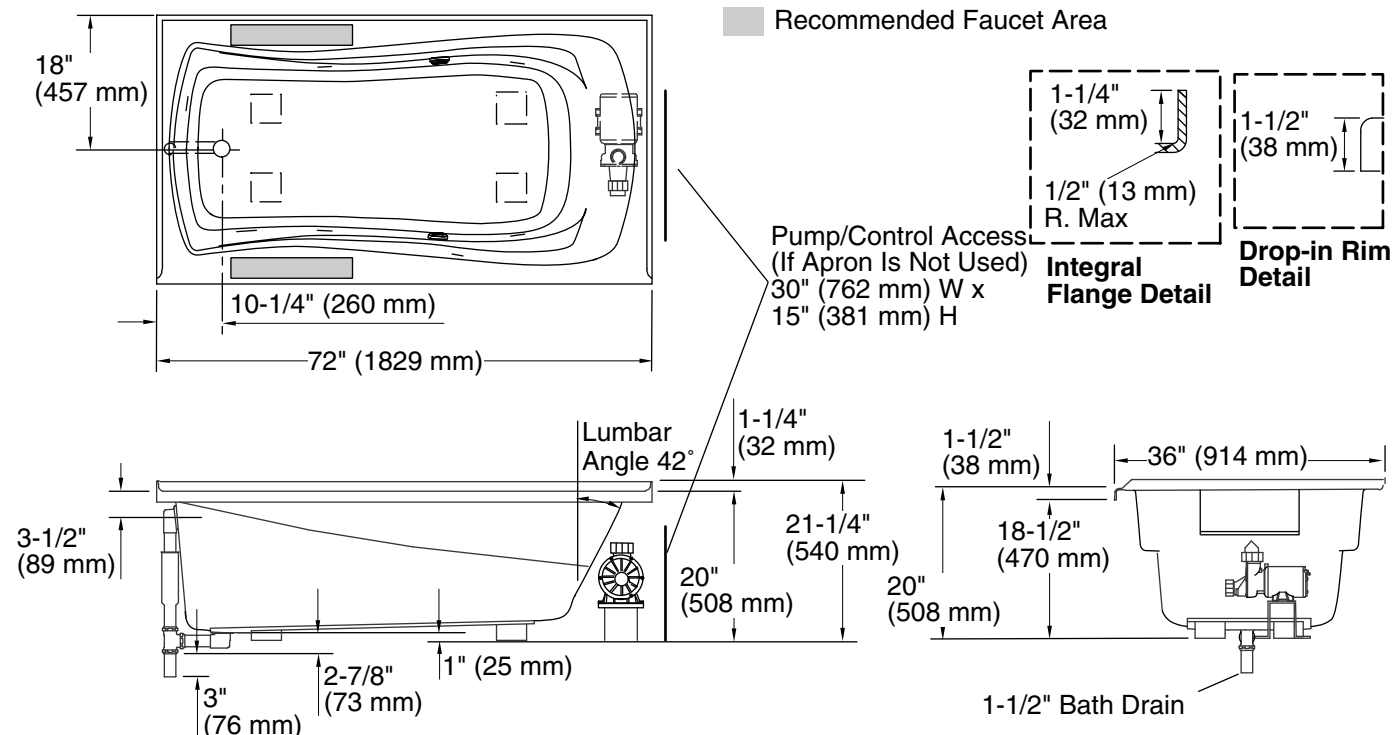

Product Diagram