

User Manual :

This manual explains how to correctly use the X-151 computerized massage machine. Please operate in accordance with the regulations and precautions in this manual.

Bathtub Cleaning and Maintenance Guidelines

A) Daily Cleaning

Clean surfaces routinely with mild liquid detergent and a non-abrasive microfiber cloth to prevent scratches.

Critical Avoidance: Harsh chemicals like acetone or ammonia-based cleaners, which can compromise surface integrity through gloss reduction or structural weakening.

B) Hazardous Chemicals

Strictly exclude products with formic acid or formaldehyde due to their accelerated material breakdown properties.

C) Surface Protection

Apply specialized anti-scratch polish periodically to fill microscopic abrasions and maintain mirror-like reflectivity.

D) Targeted Stain

Removal Organic stains: Gently buff with non-gel toothpaste using circular motions.

Mineral deposits: Treat with heated vinegar solution (50% dilution) or fresh lemon wedges during post-use warmth for optimal dissolution.

Technical Specifications

1. Chemical Compatibility

Acetone/ammonia trigger irreversible coating erosion; formaldehyde compounds promote polymer chain scission.

2. Material-Specific

Care Ceramic/acrylic surfaces: Use nano-particle polishes for scratch occlusion.

Thermal enhancement: 40-50°C surface temperature boosts acetic acid reactivity by 30%.

3. Eco-Friendly Alternatives

Persistent scaling: Apply pH-neutral baking soda slurry (2:1 water ratio) or 5% citric acid soak.

Final Rinse Protocol: Flood surfaces with lukewarm water for 20 seconds minimum to neutralize active agents, mitigating residual toxicity and surface adhesion loss.

X-151

Precautions Instruction

Precautions:

Place the bathtub in a proper position and ensure it is balanced.

Connect the cold and hot water pipes properly. After turning on the power supply, press the safety button to energize the device. First press the hot-cold water switch, then rotate the 2-grade switch until water flows out of the waterfall faucet.

Do not turn on the water pump until the water level is higher than the massage sprinkle nozzle. When the water level submerges the massage sprinkle nozzle, press the waterpower massage switch; if you need to enhance the effect, press the air bubble switch to activate the air bubble function, then rotate the water adjustment switch to adjust the waterpower intensity. After use, turn off all control switches and the power supply, and drain out the water in the bathtub.

Children are forbidden to use the massage bathtub without adult supervision.

Do not use the massage bathtub if the leakage protection device is not properly connected.

Electric Shock Hazard: Do not allow electrical appliances to approach the massage bathtub when it contains water.

Drowning Risk from High Temperature: Persons taking medication or with pre-existing medical conditions should consult a doctor before using this product.

Do not fill the bathtub with excessive water before entering. When entering the bathtub, if the water volume exceeds 2/3 of the bathtub capacity, it will cause water overflow and a slippery floor. Be cautious and pay attention to safety when entering or exiting!


Do not use the massage bathtub immediately after meals. Avoid consuming alcohol during or before bathing; alcohol intoxication may lead to loss of consciousness or even fainting.

12-13. If you are or suspect you may be pregnant, or have hypertension, heart disease, or kidney disease, do not use the massage bathtub unless you consult a professional doctor for advice.

14-15. Keep small items (such as soap scraps, hairpins, earrings, bottle caps) and tiny objects away from the massage bathtub, as they may be drawn into the circulation system and cause it to malfunction.

The surface panels of the bathtub have the property of softening and shrinking when exposed to high temperatures; therefore, soaking in hot water above 80°C should be avoided. Do not use hard objects to knock or scratch the surface, and do not let the surface come into contact with strong alkalis, strong acids, or strong solutions.



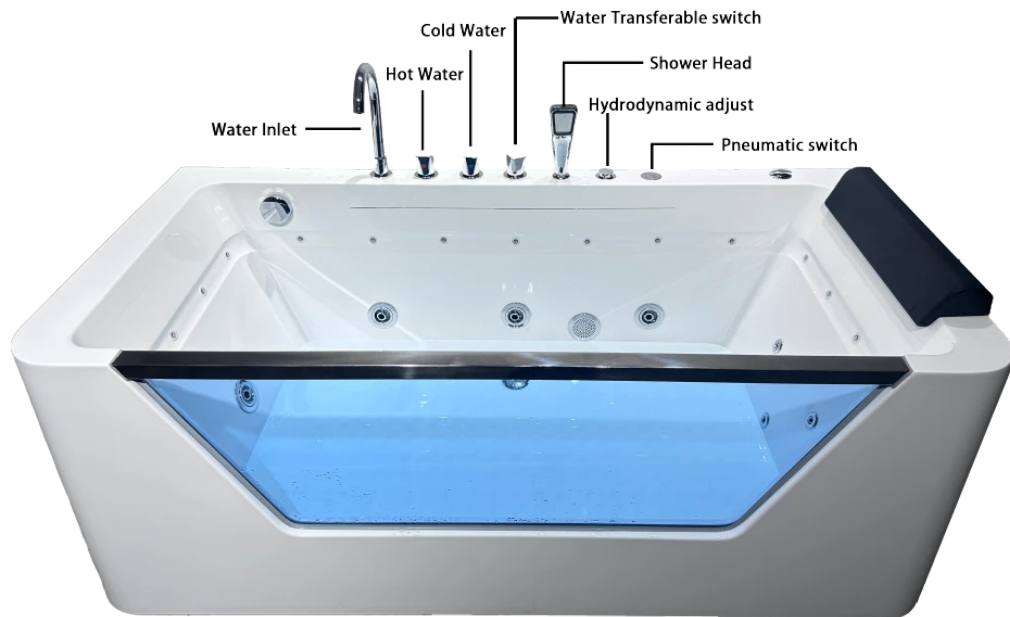

Water pump



Note

- 1.To prevent electric shock, ensure that a leakage protection switch is installed.
- 2.Ensure that the electrical appliance is earthed, and the equipment must be fitted with an effective earthing device.
- 3.This equipment is only used for massage bathtubs.
- 4.Explanation: The above accessories can be provided according to customer needs.

What is the electrical requirements?

Input voltage: 110V, Current:6.8A, Power:750 W.

External circuitry need to equip with high sensitive and fast type leakage protection switch. (Induced current rating below 15MA, trip time should less than 0.1 second, rated current is above 30A)

What size is the water inlet connection?What is the length of the shower hose?

Please reserve the connectors of 1/2" external thread cold/hot water hoses(Out-stand the wall 1.18"). Reserve the drainage hole> 1.97 inch.

Shower head hose length: 59".

Drain pipe length: 47".

Power cord length: 75"

Is faucet included?

Yes.The tub includes faucets, drainer, pull-out hand-shower,waterproof headrest,overflow.

What is the dimensions and the soaking depth?

Exterior dimensions: 66.93"L *31.5"W *26.77"H

Interior Size:

44.09"L * 23.62"W (the bottom of the bathtub) 、 58.66"L * 25.98"W (the top of the bathtub)

Depth to overflow drain: 15"

Important Notes:

- 1.Children, persons with reduced physical, sensory or mental capabilities, and those lacking experience and knowledge shall not use this appliance unless they are under supervision or have received instructions. Meanwhile, children must be supervised to prevent them from playing with the appliance. Children are strictly prohibited from using this product alone and must be accompanied by an adult.
- 2.Users shall ensure that the grounding facilities are effective and comply with national safety standards. Install the earth leakage protector properly and keep the switch away from areas accessible to water.
- 3.Parts containing live components (except for parts supplied with safety extra-low voltage not exceeding 12V) must be inaccessible to a person in the bath.
- 4.Earthed appliances must be permanently connected to fixed wiring.
- 5.For stationary appliances not equipped with a device for disconnection from the main power supply (where the contact separation in all poles of the device provides full disconnection under over-voltage category III), the instruction manual specifies that the disconnection device must be incorporated into the fixed wiring in accordance with wiring regulations.
- 6.Do not allow water to drip into the impeller of the water pump; otherwise, the pump may short-circuit and burn out.
- 7.The power supply must be cut off when troubleshooting, and maintenance work must be carried out by professionals.
- 8.The maximum permissible inlet water pressure is 600 kPa.
- 9.This appliance shall be supplied through a residual current device (RCD) with a rated tripping current not exceeding 30 mA.

If the power cord is damaged, it must be replaced by the manufacturer, its service agent, or persons with similar qualifications to avoid hazards.