

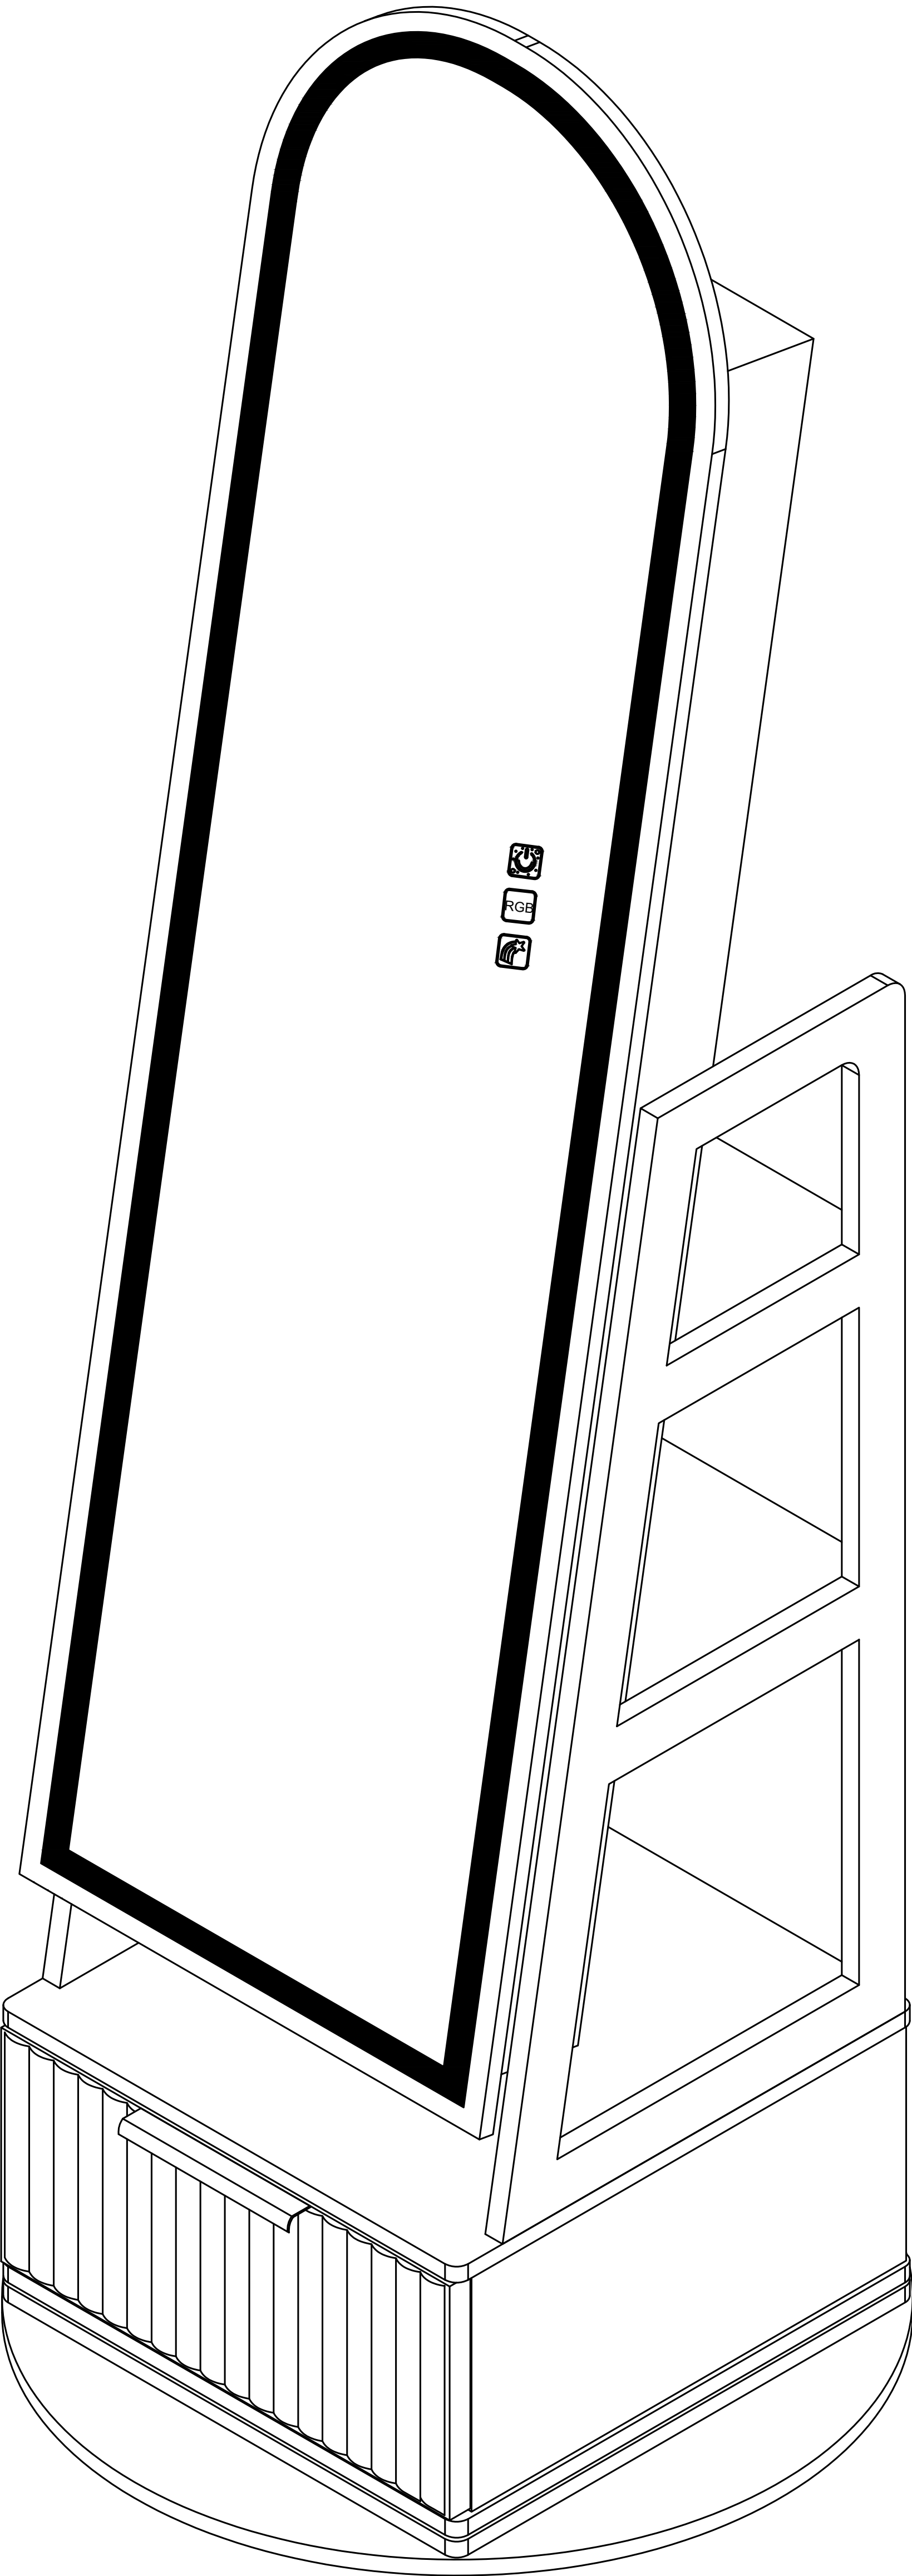
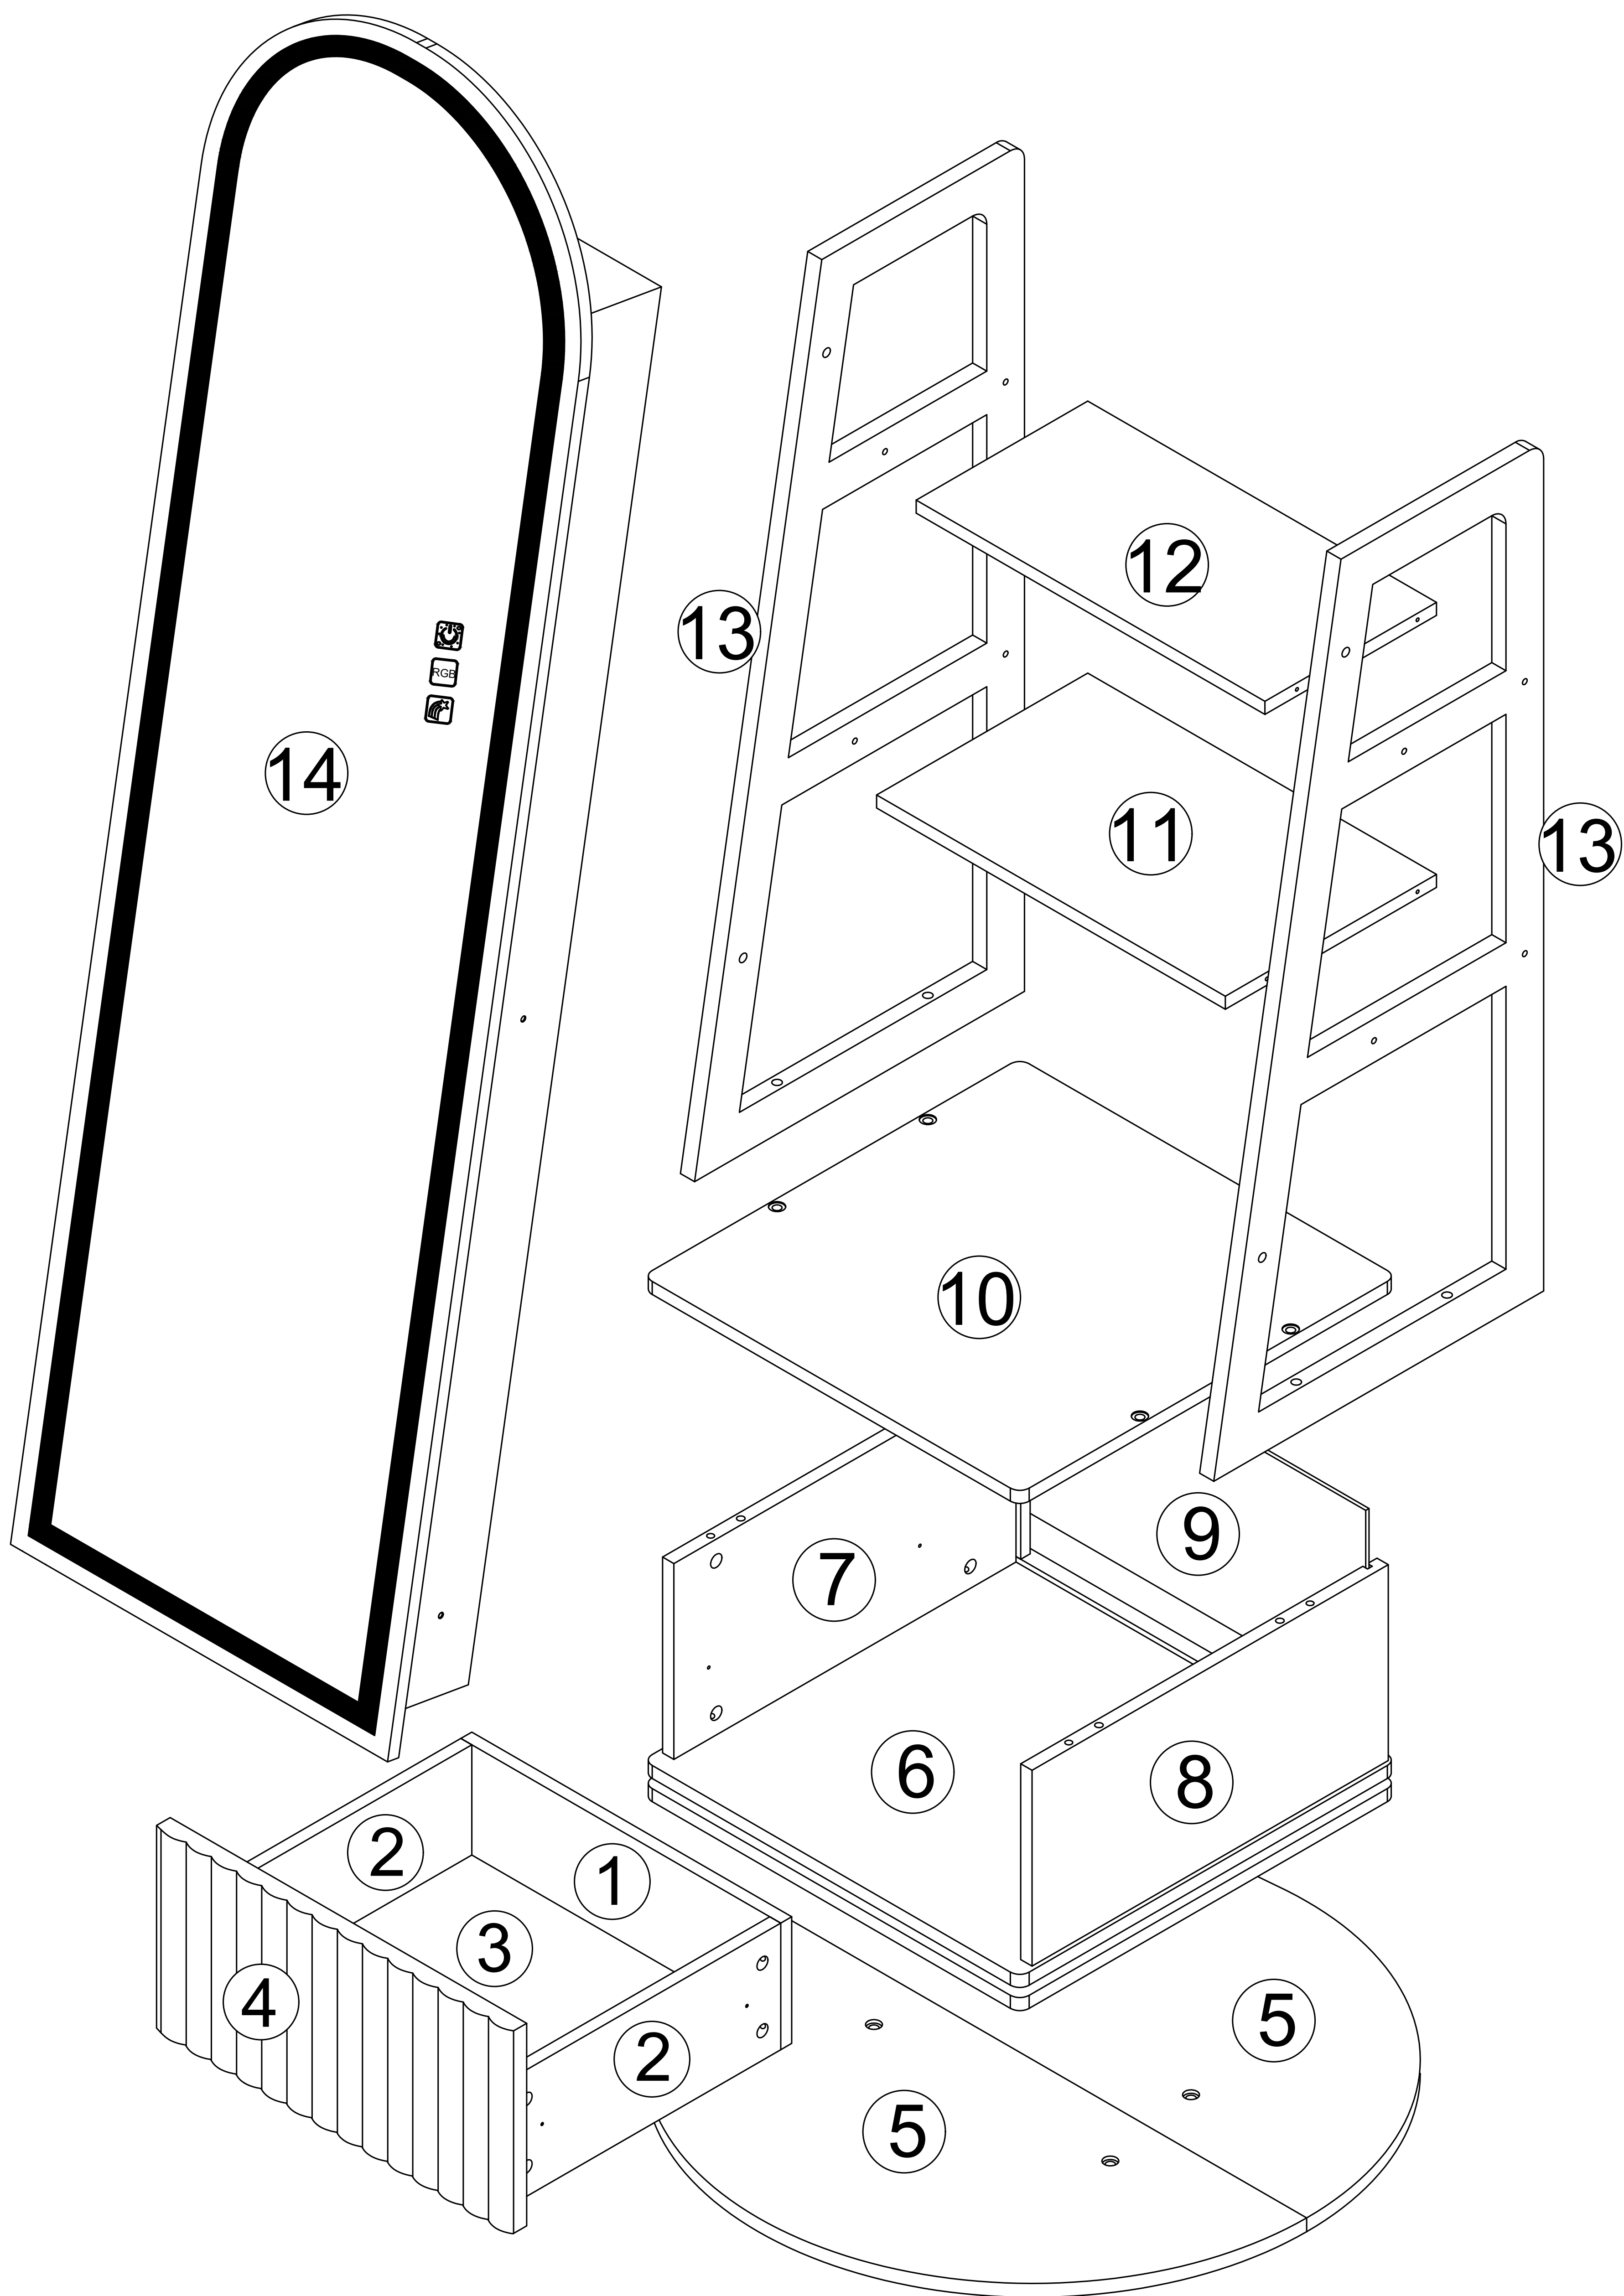
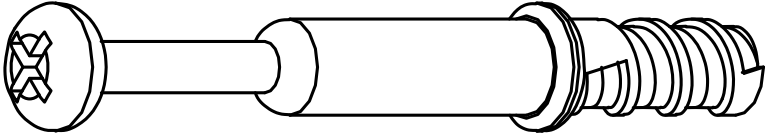

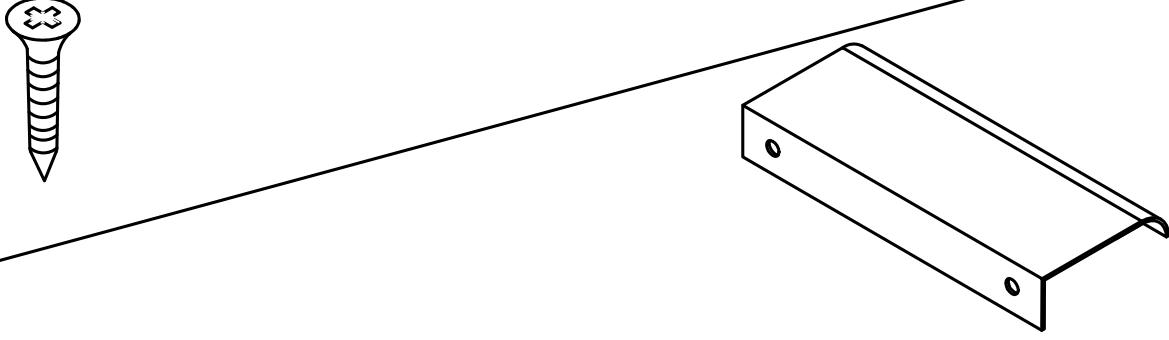
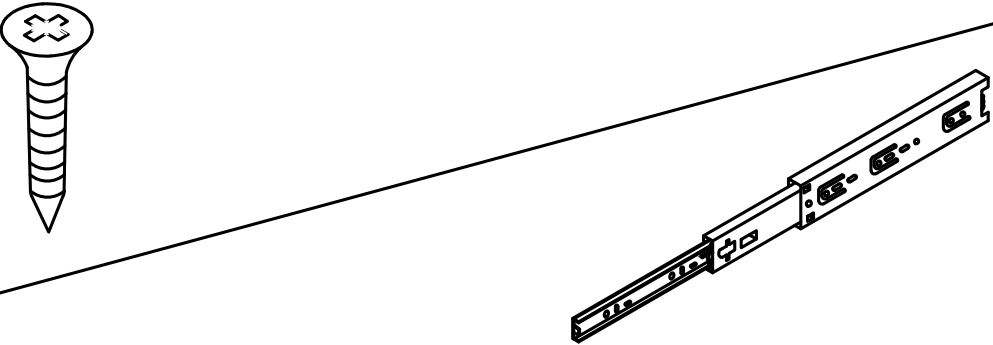
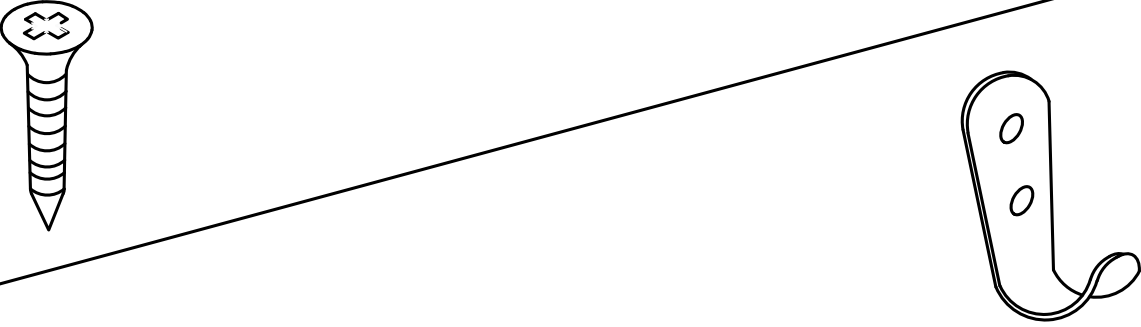


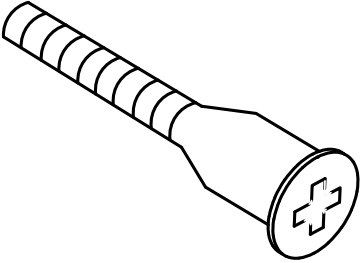
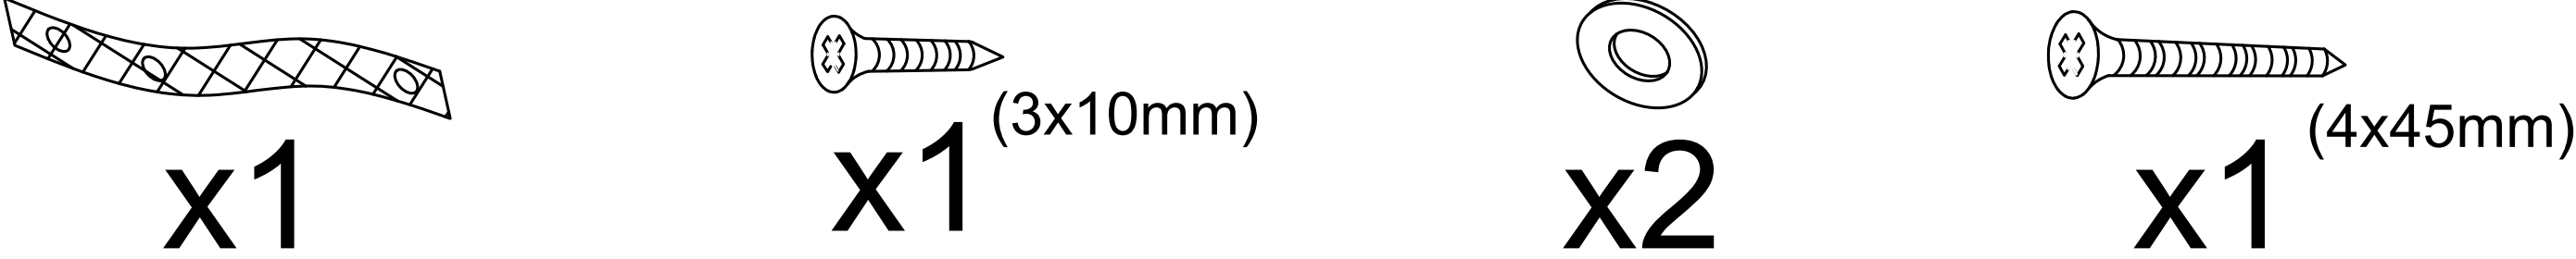


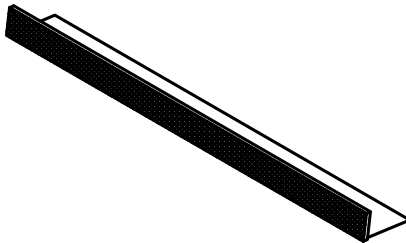

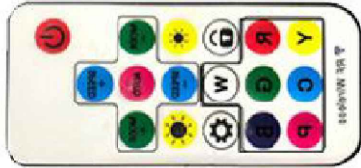


67057 MIRROR JEWELLERY CABINET

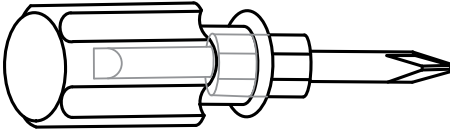


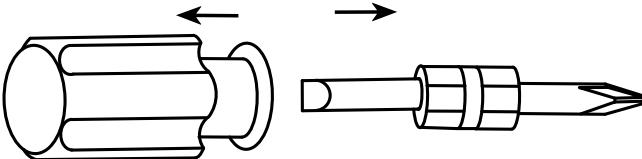


Accessories list			
A		Two In One Screw (6x28mm)	16pcs +2pcs
B		Two In One Nut (10x12mm)	16pcs +2pcs
C		Wood Chipping (6x30mm)	8pcs +2pcs
D		Screw & Handle (3x10mm)	2pcs 1pcs
E		Screw & Guide (3x12mm) (29cm)	10pcs +2pcs 2pcs
F		Screw & Hooks (3x10mm)	4pcs +2pcs 2pcs
G		Screw (6x22mm)	8pcs +1pcs
H		Screw (6x50mm)	4pcs +1pcs
I		Screw (5x40mm)	8pcs +1pcs
J	Anti tipping hardware 		
		The key	1pcs
L		Non-slip pads (370x6x6mm)	2pcs +1pcs
M		Acrylic left and right accessories	4pcs +2pcs
N		Acrylic spacer	2pcs
		The power adapter (12V 3A)	1pcs
		Remote control	1pcs
 1pcs  Double-head screwdriver, use as required 2			

Use parts A and B




Step1

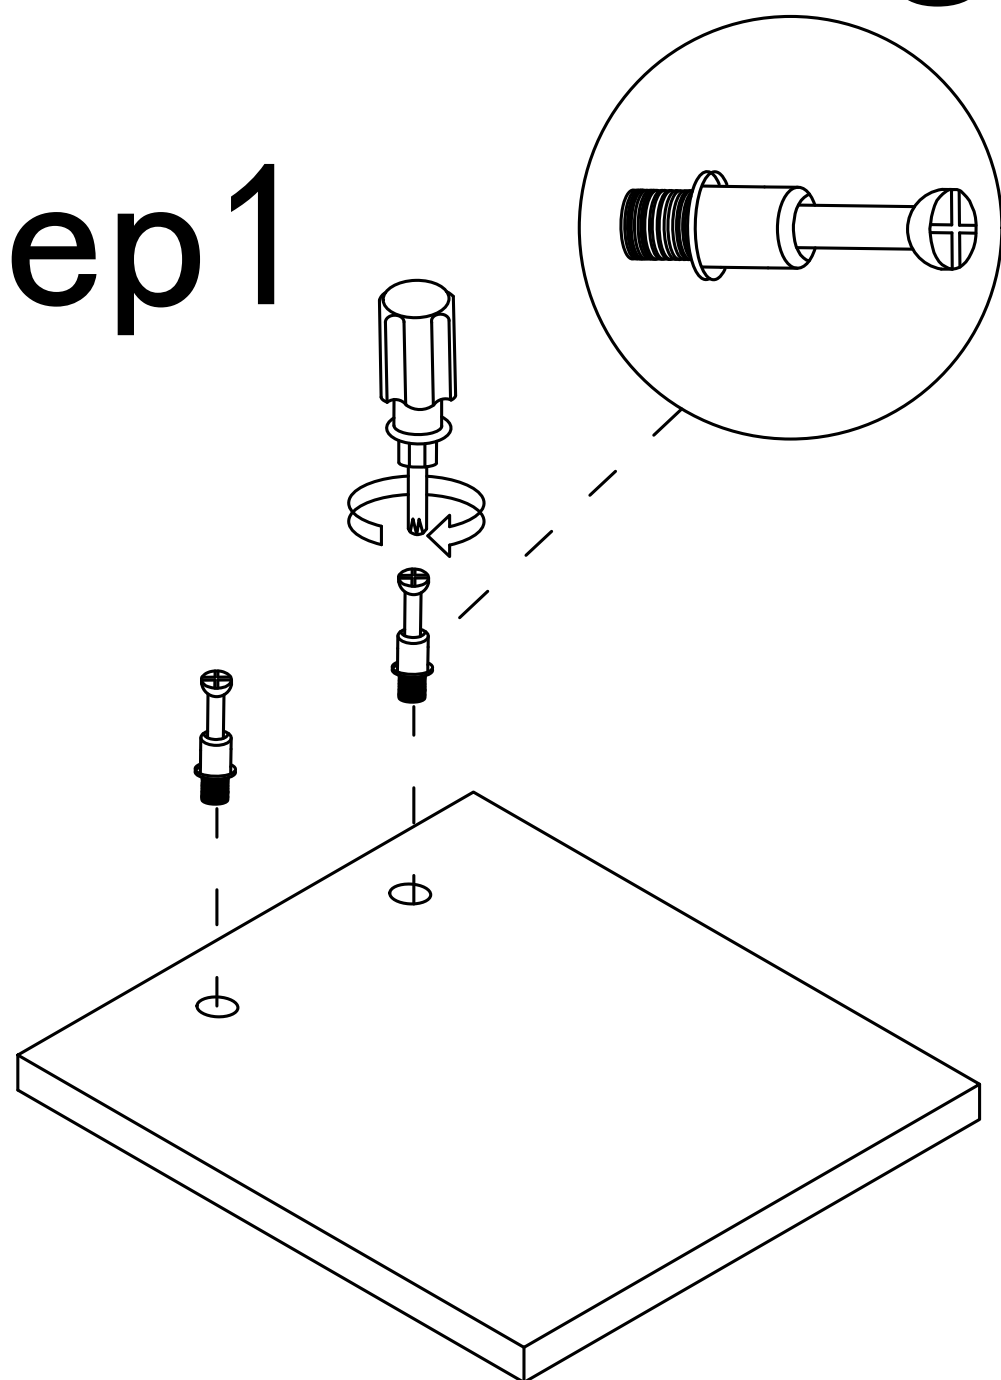

Step2

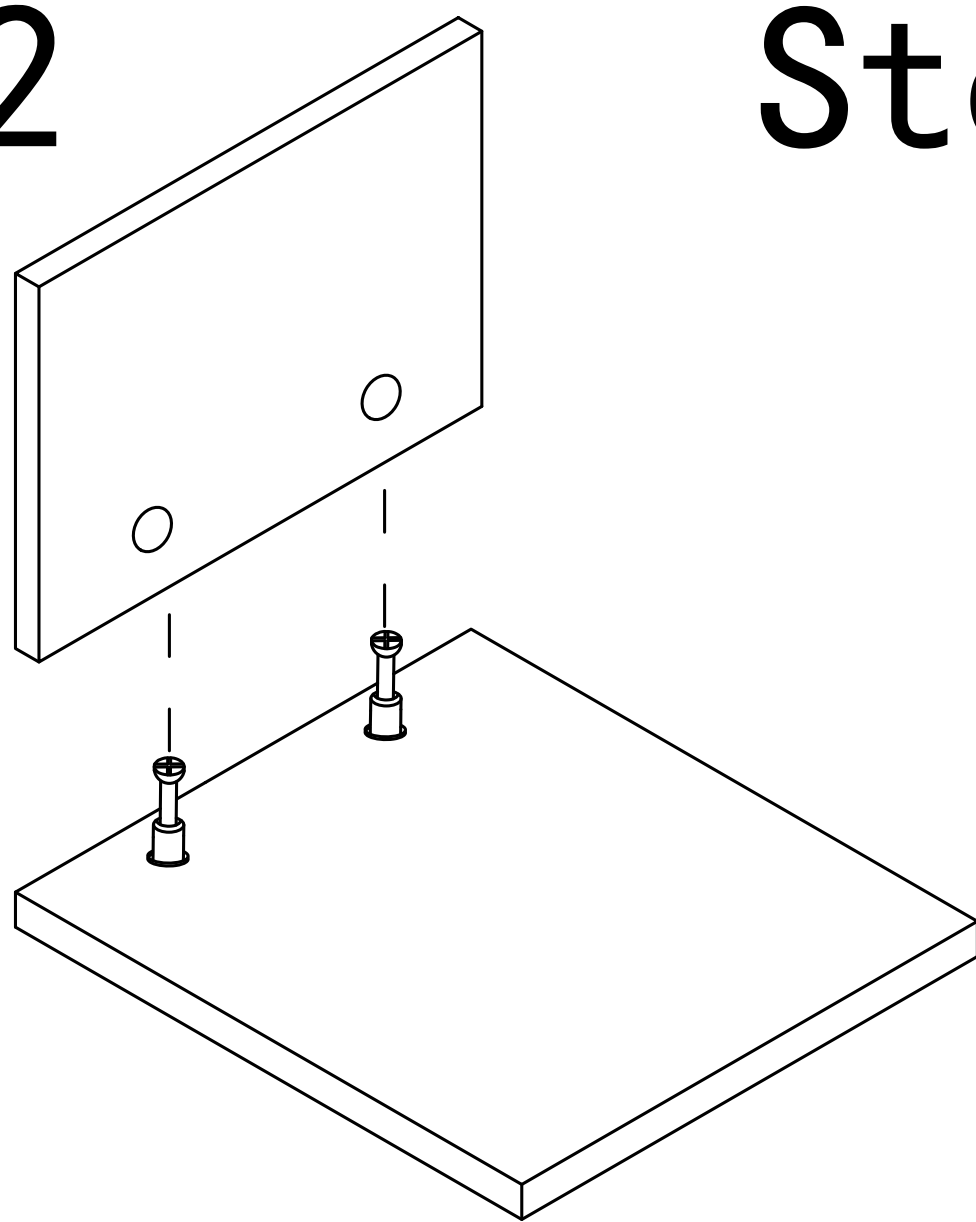



Step3

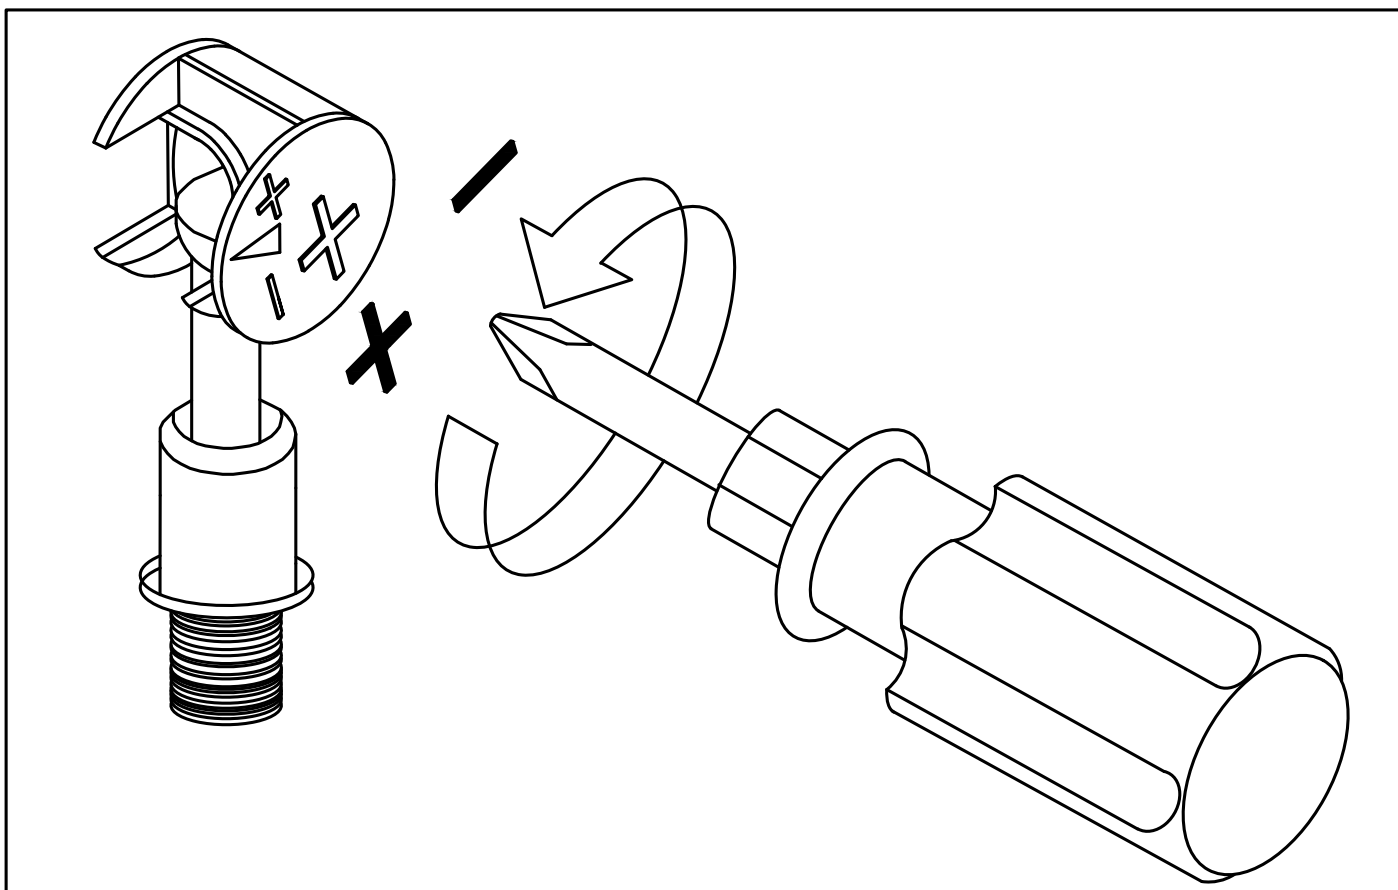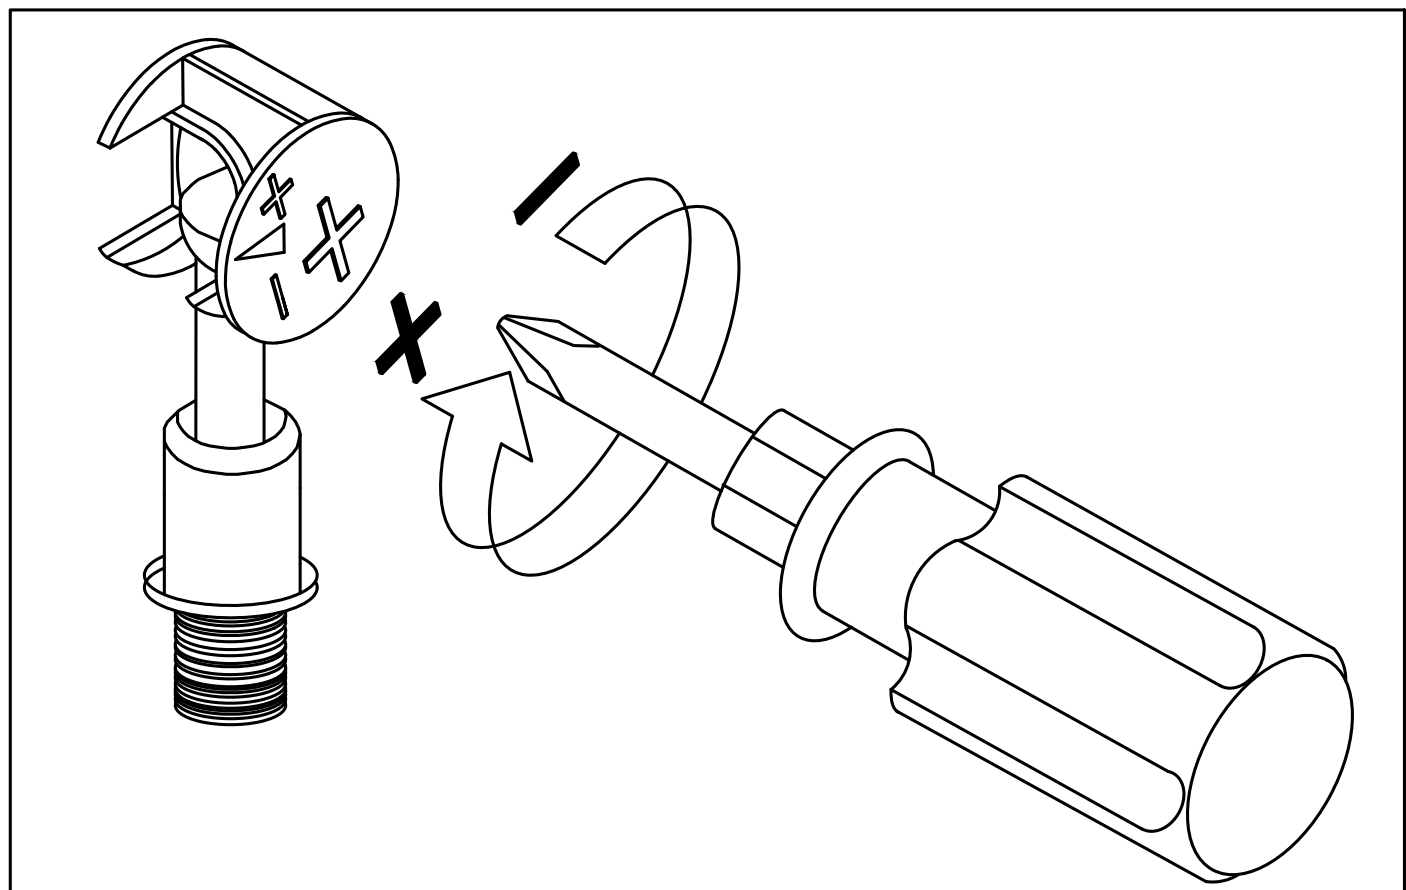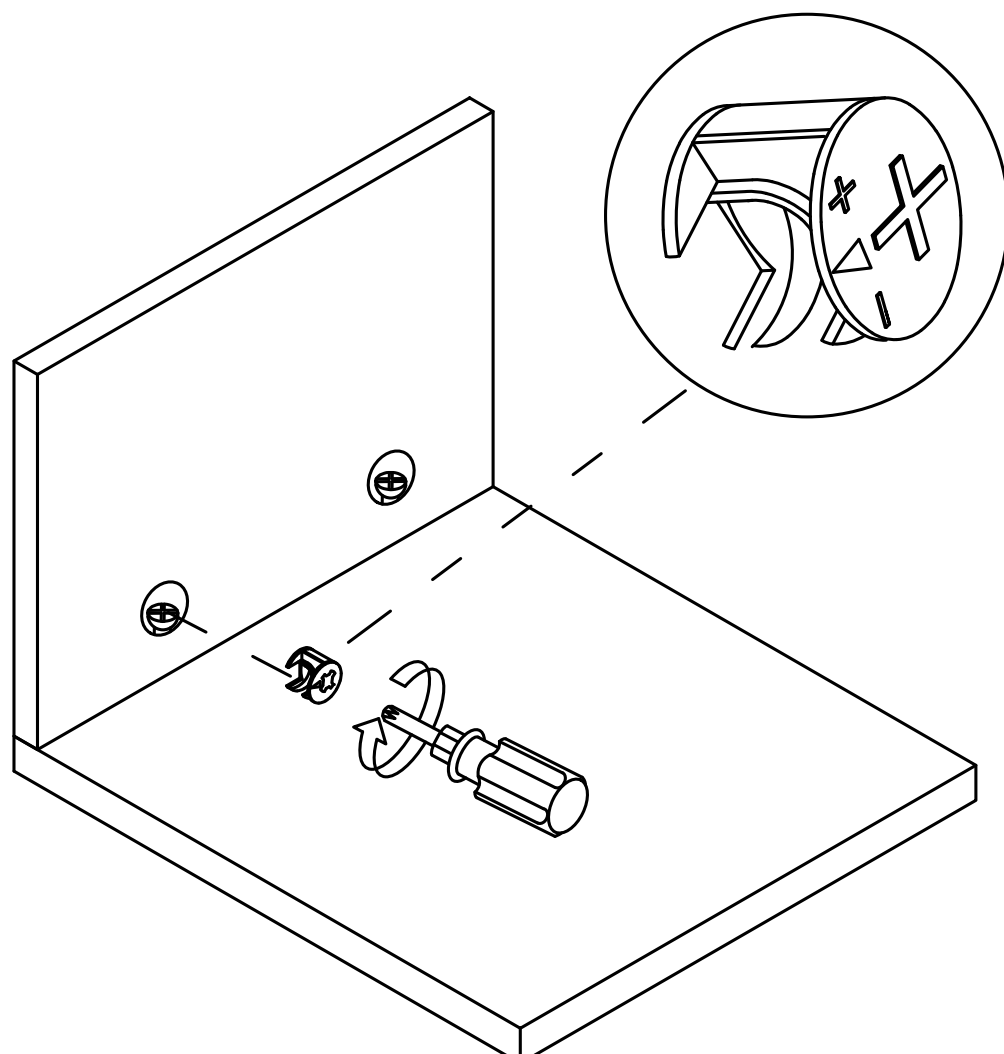


Use a screwdriver to lock in the direction of the "+" sign

Disassemble along the direction of "-" sign


Step 1

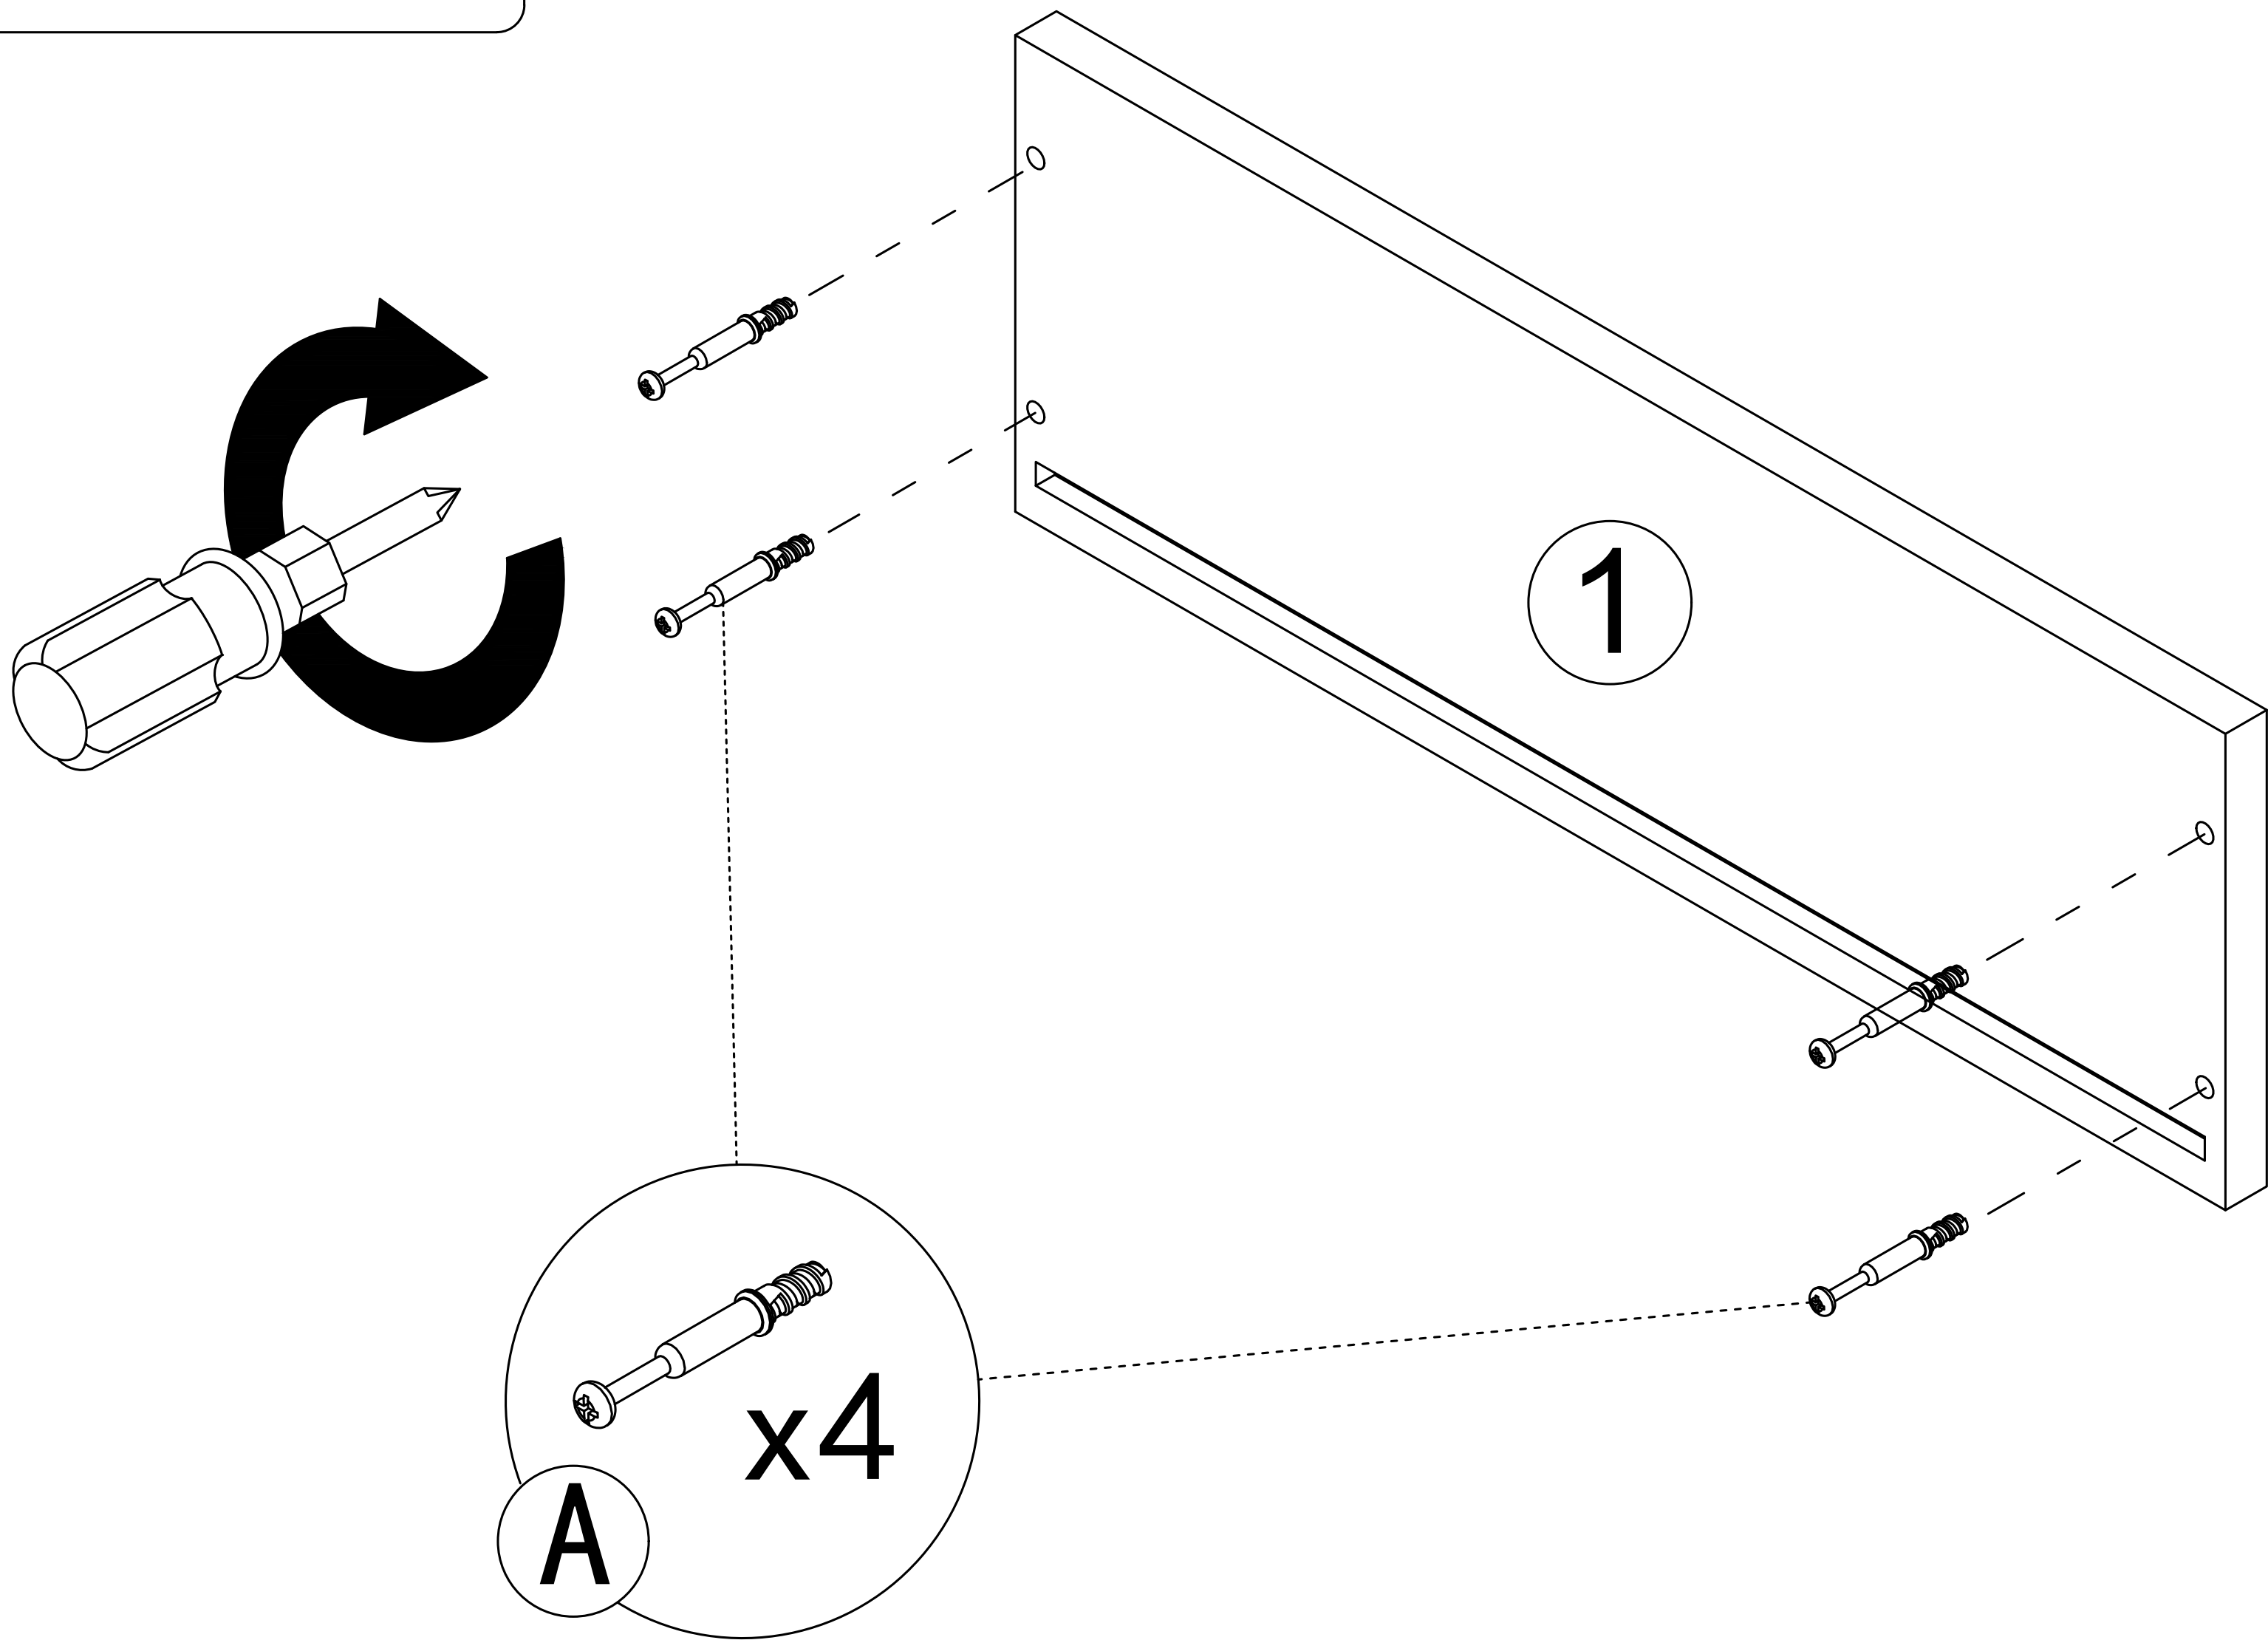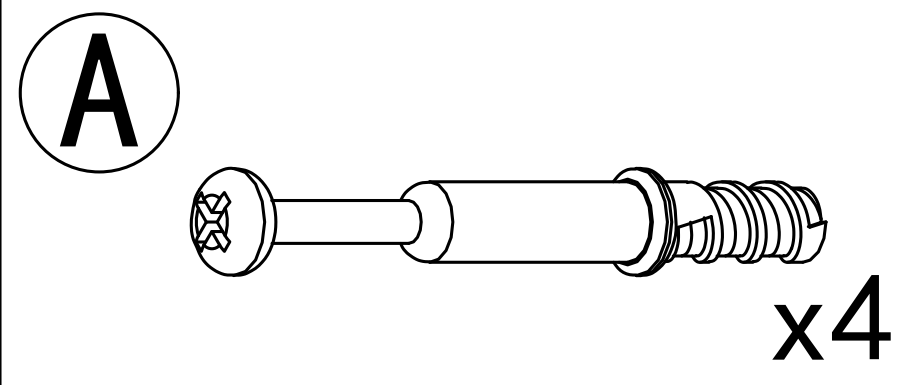



Step 2

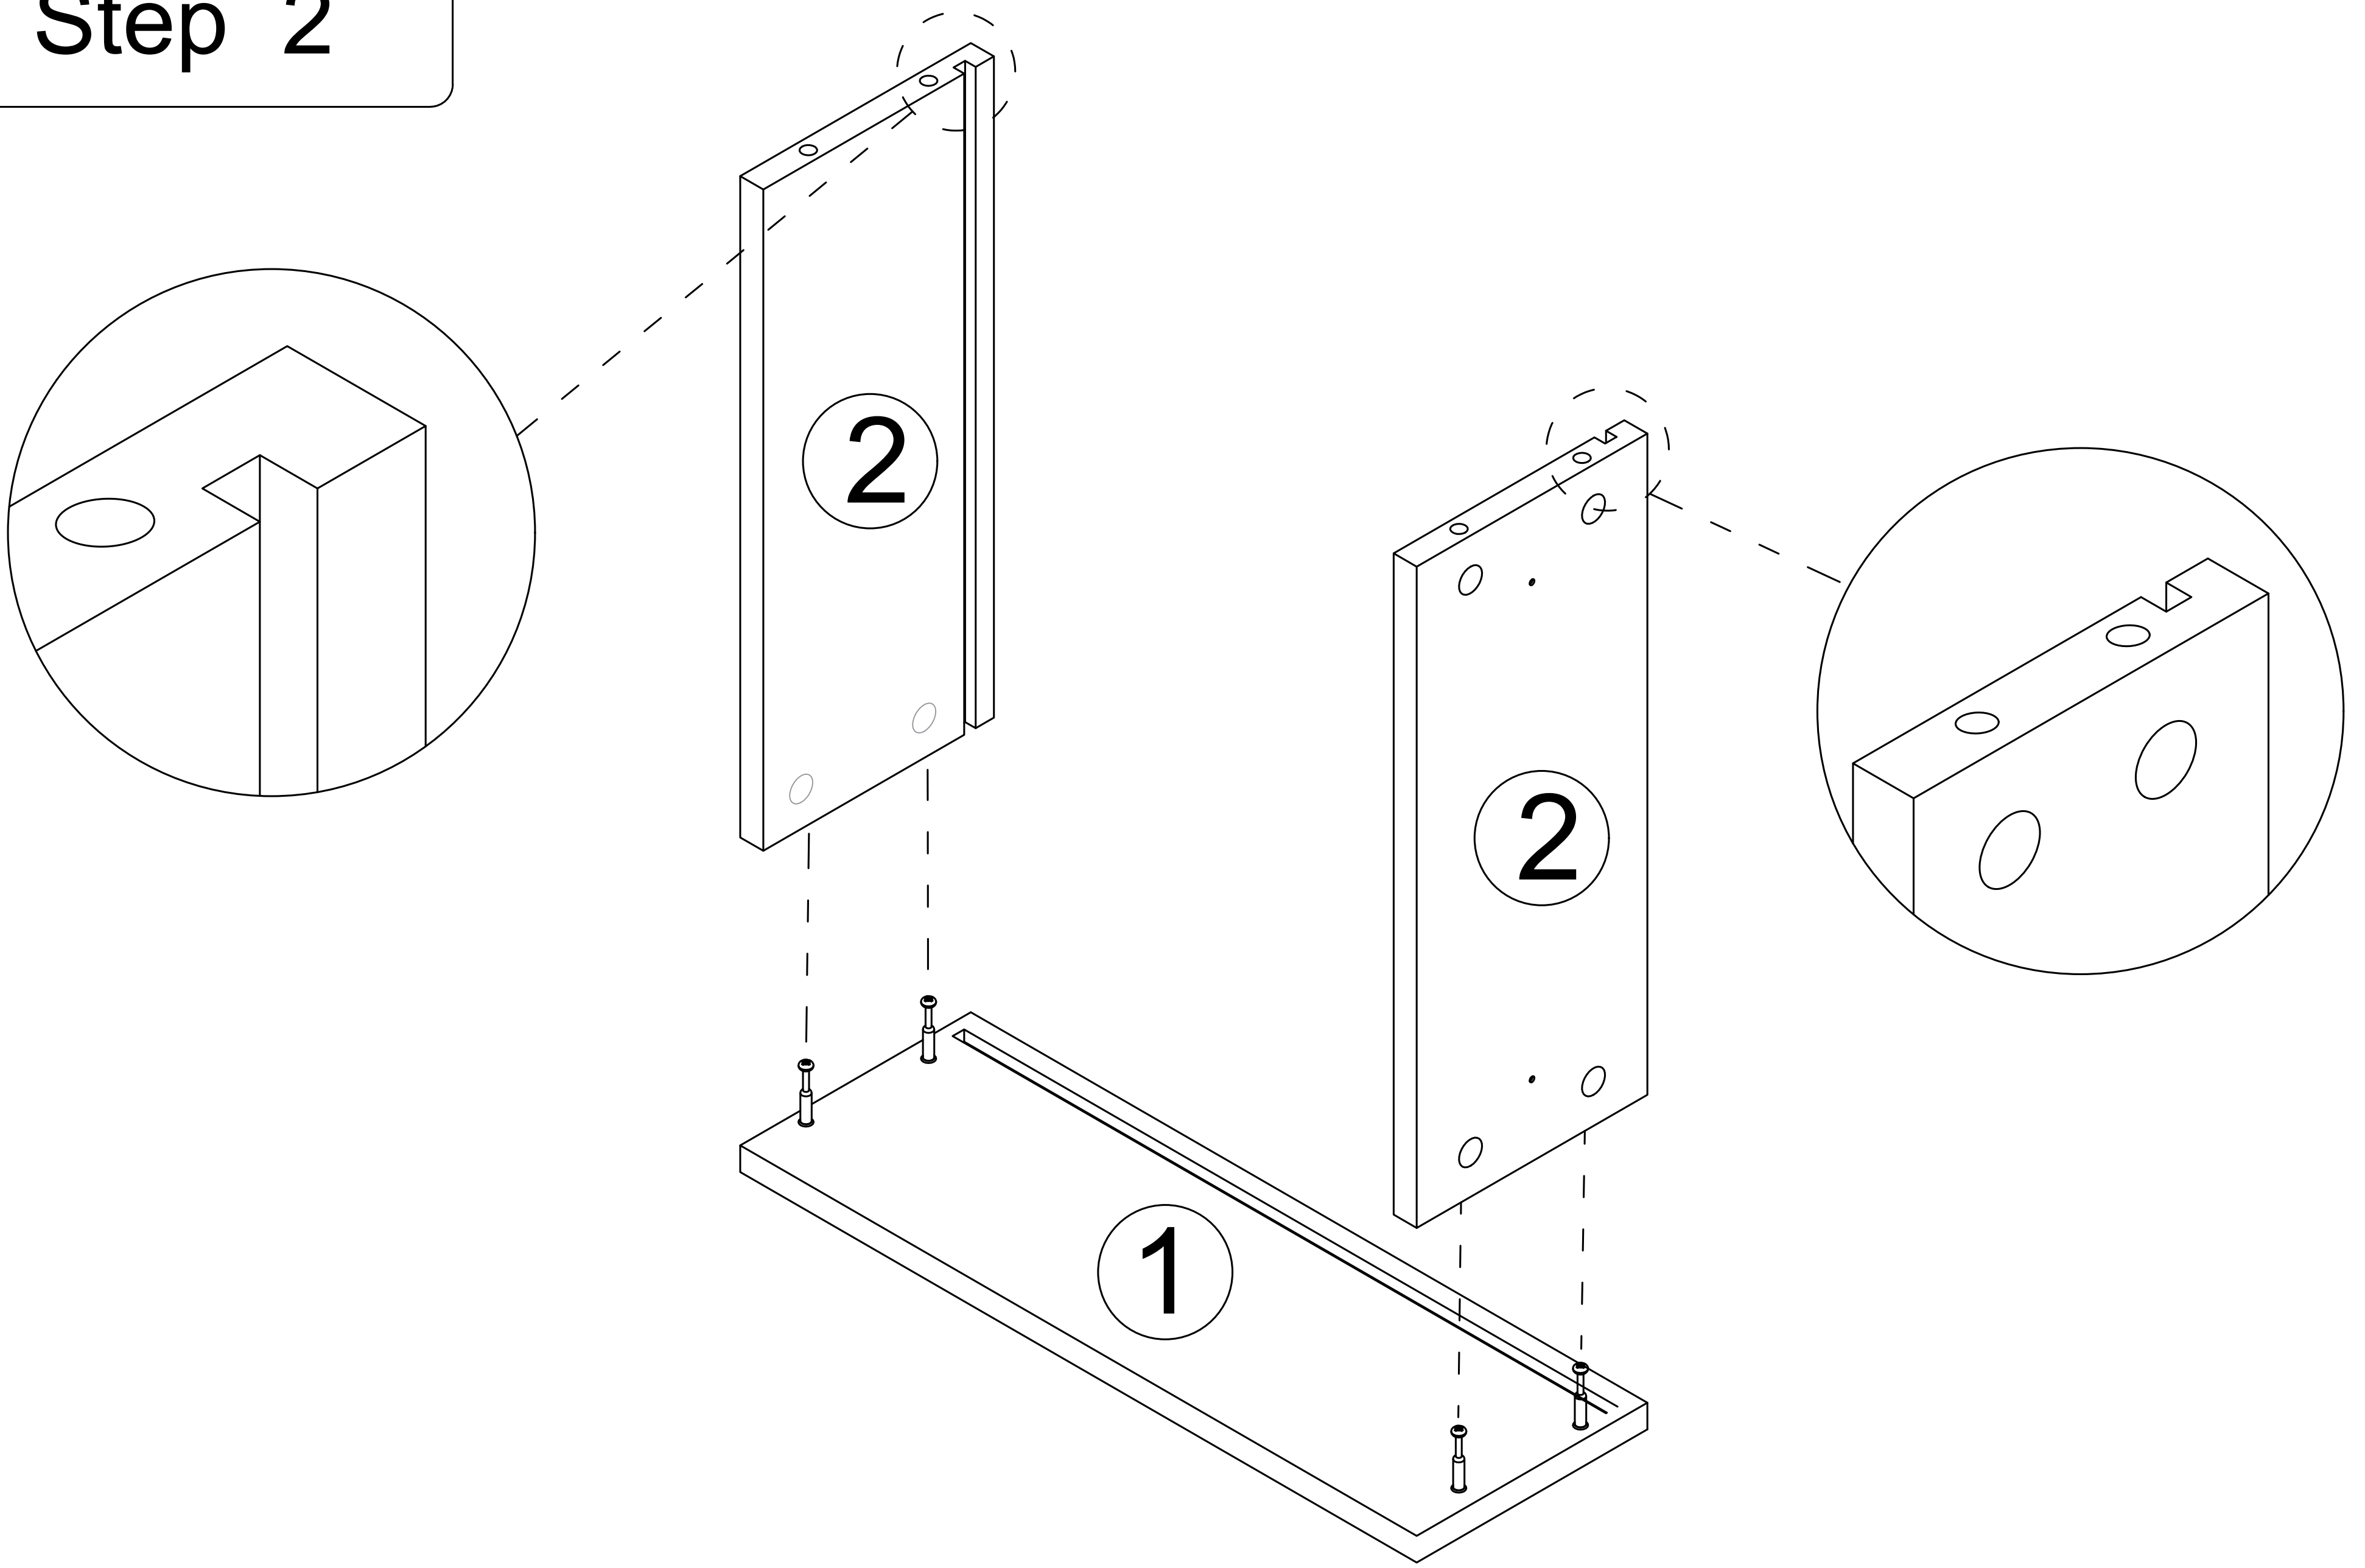



Step 3

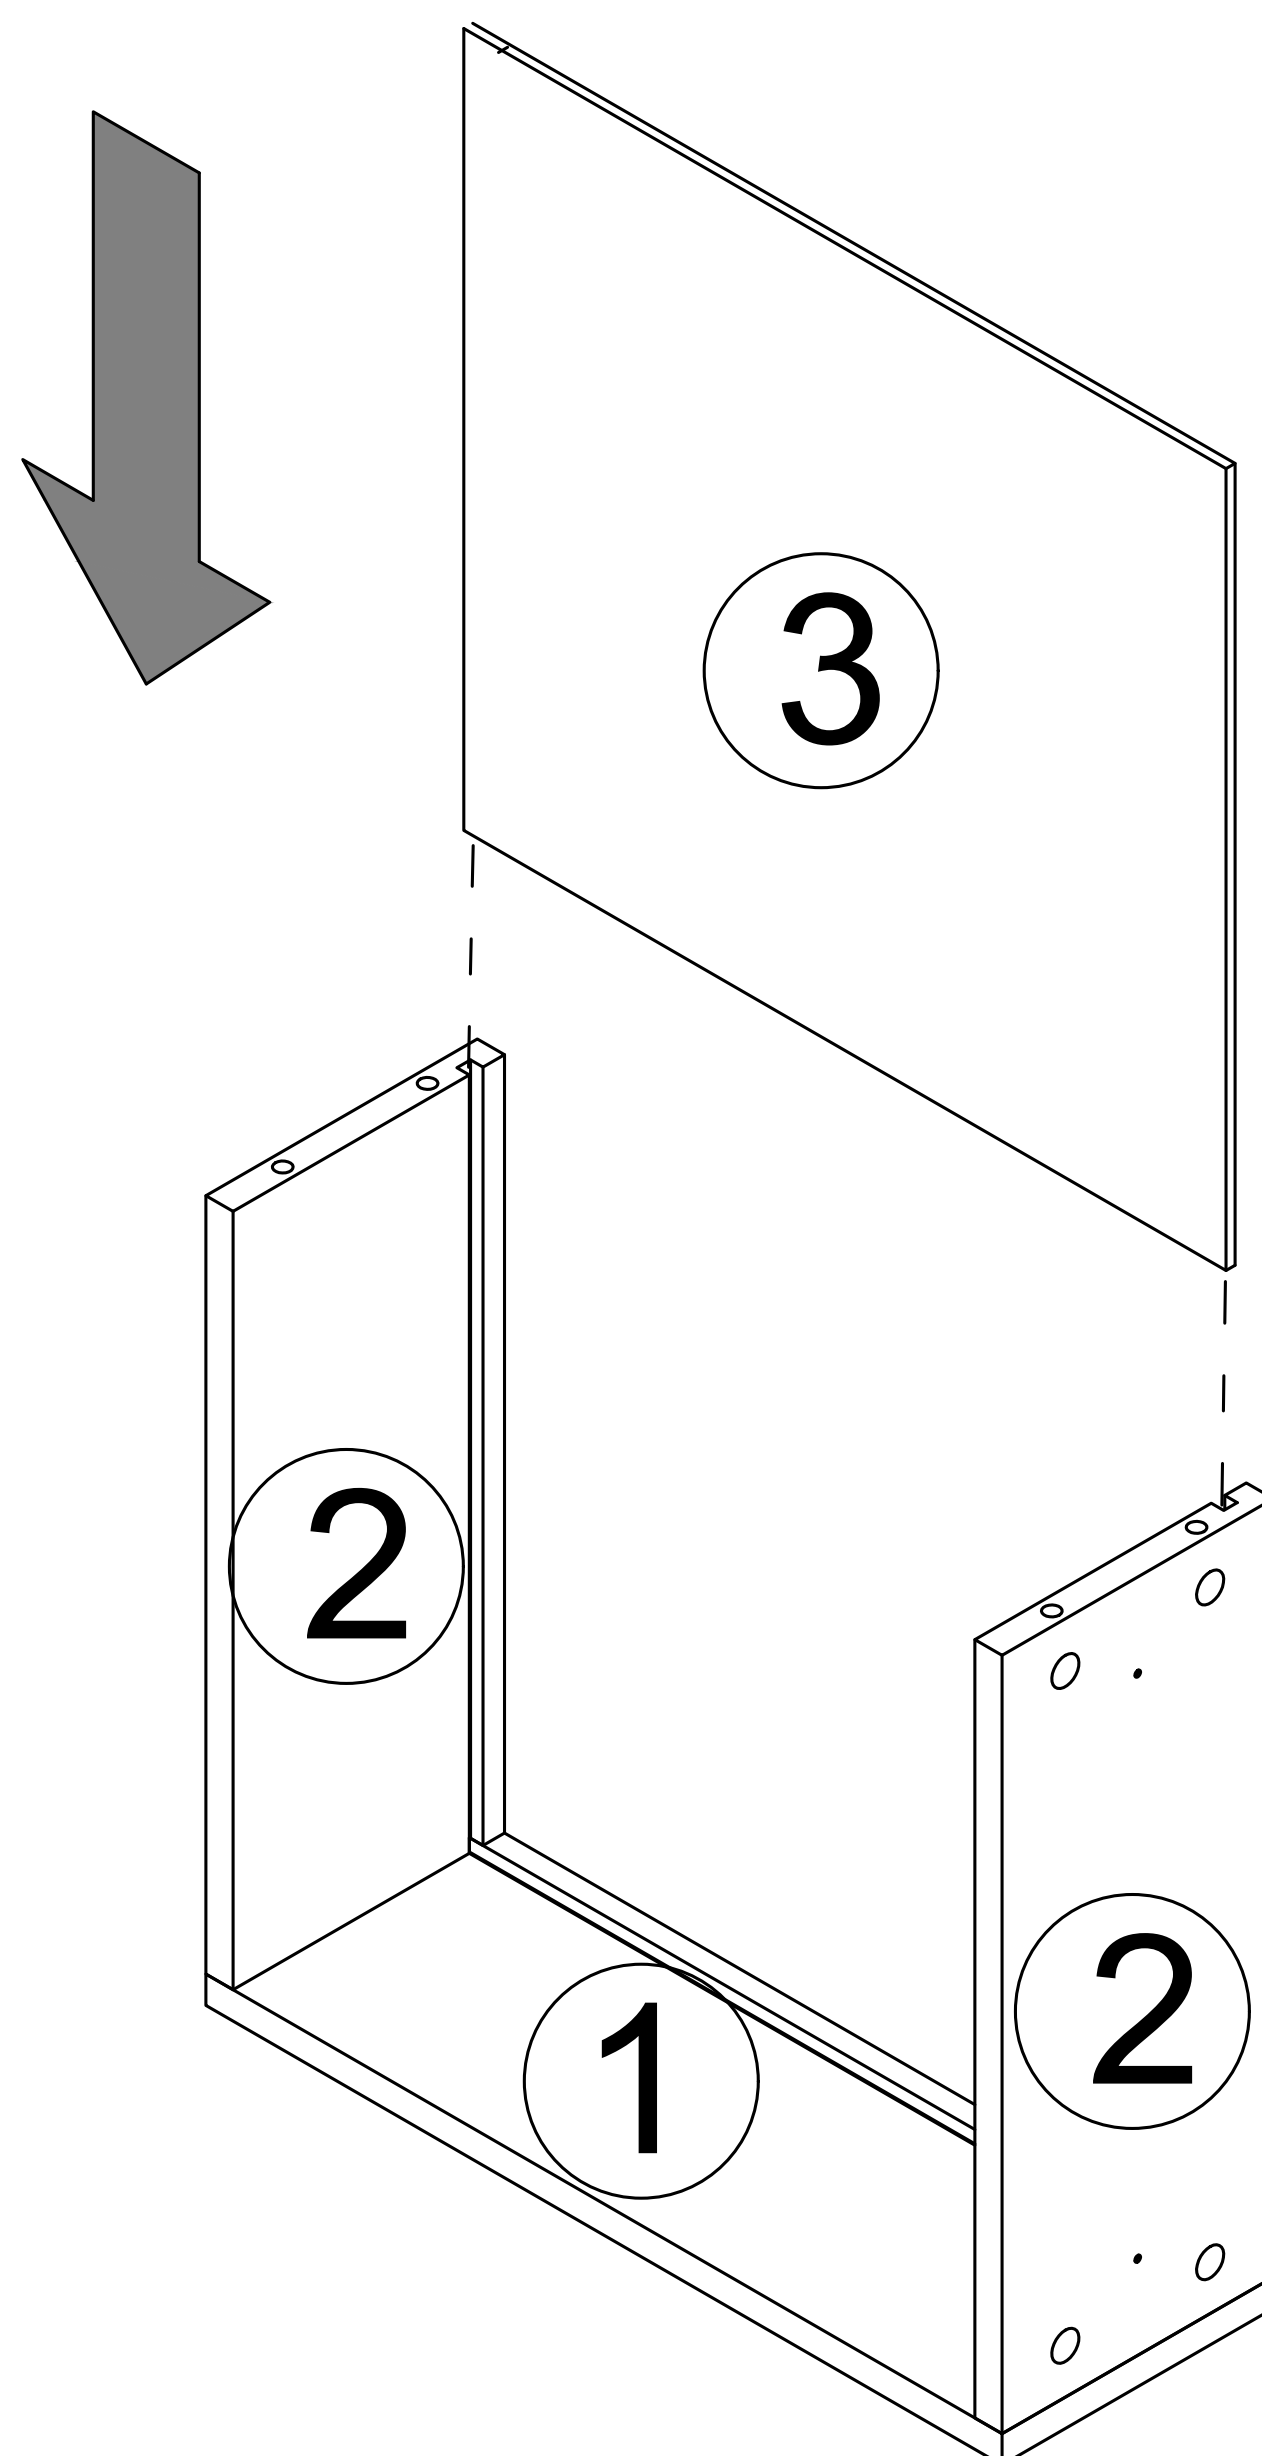

Step 4

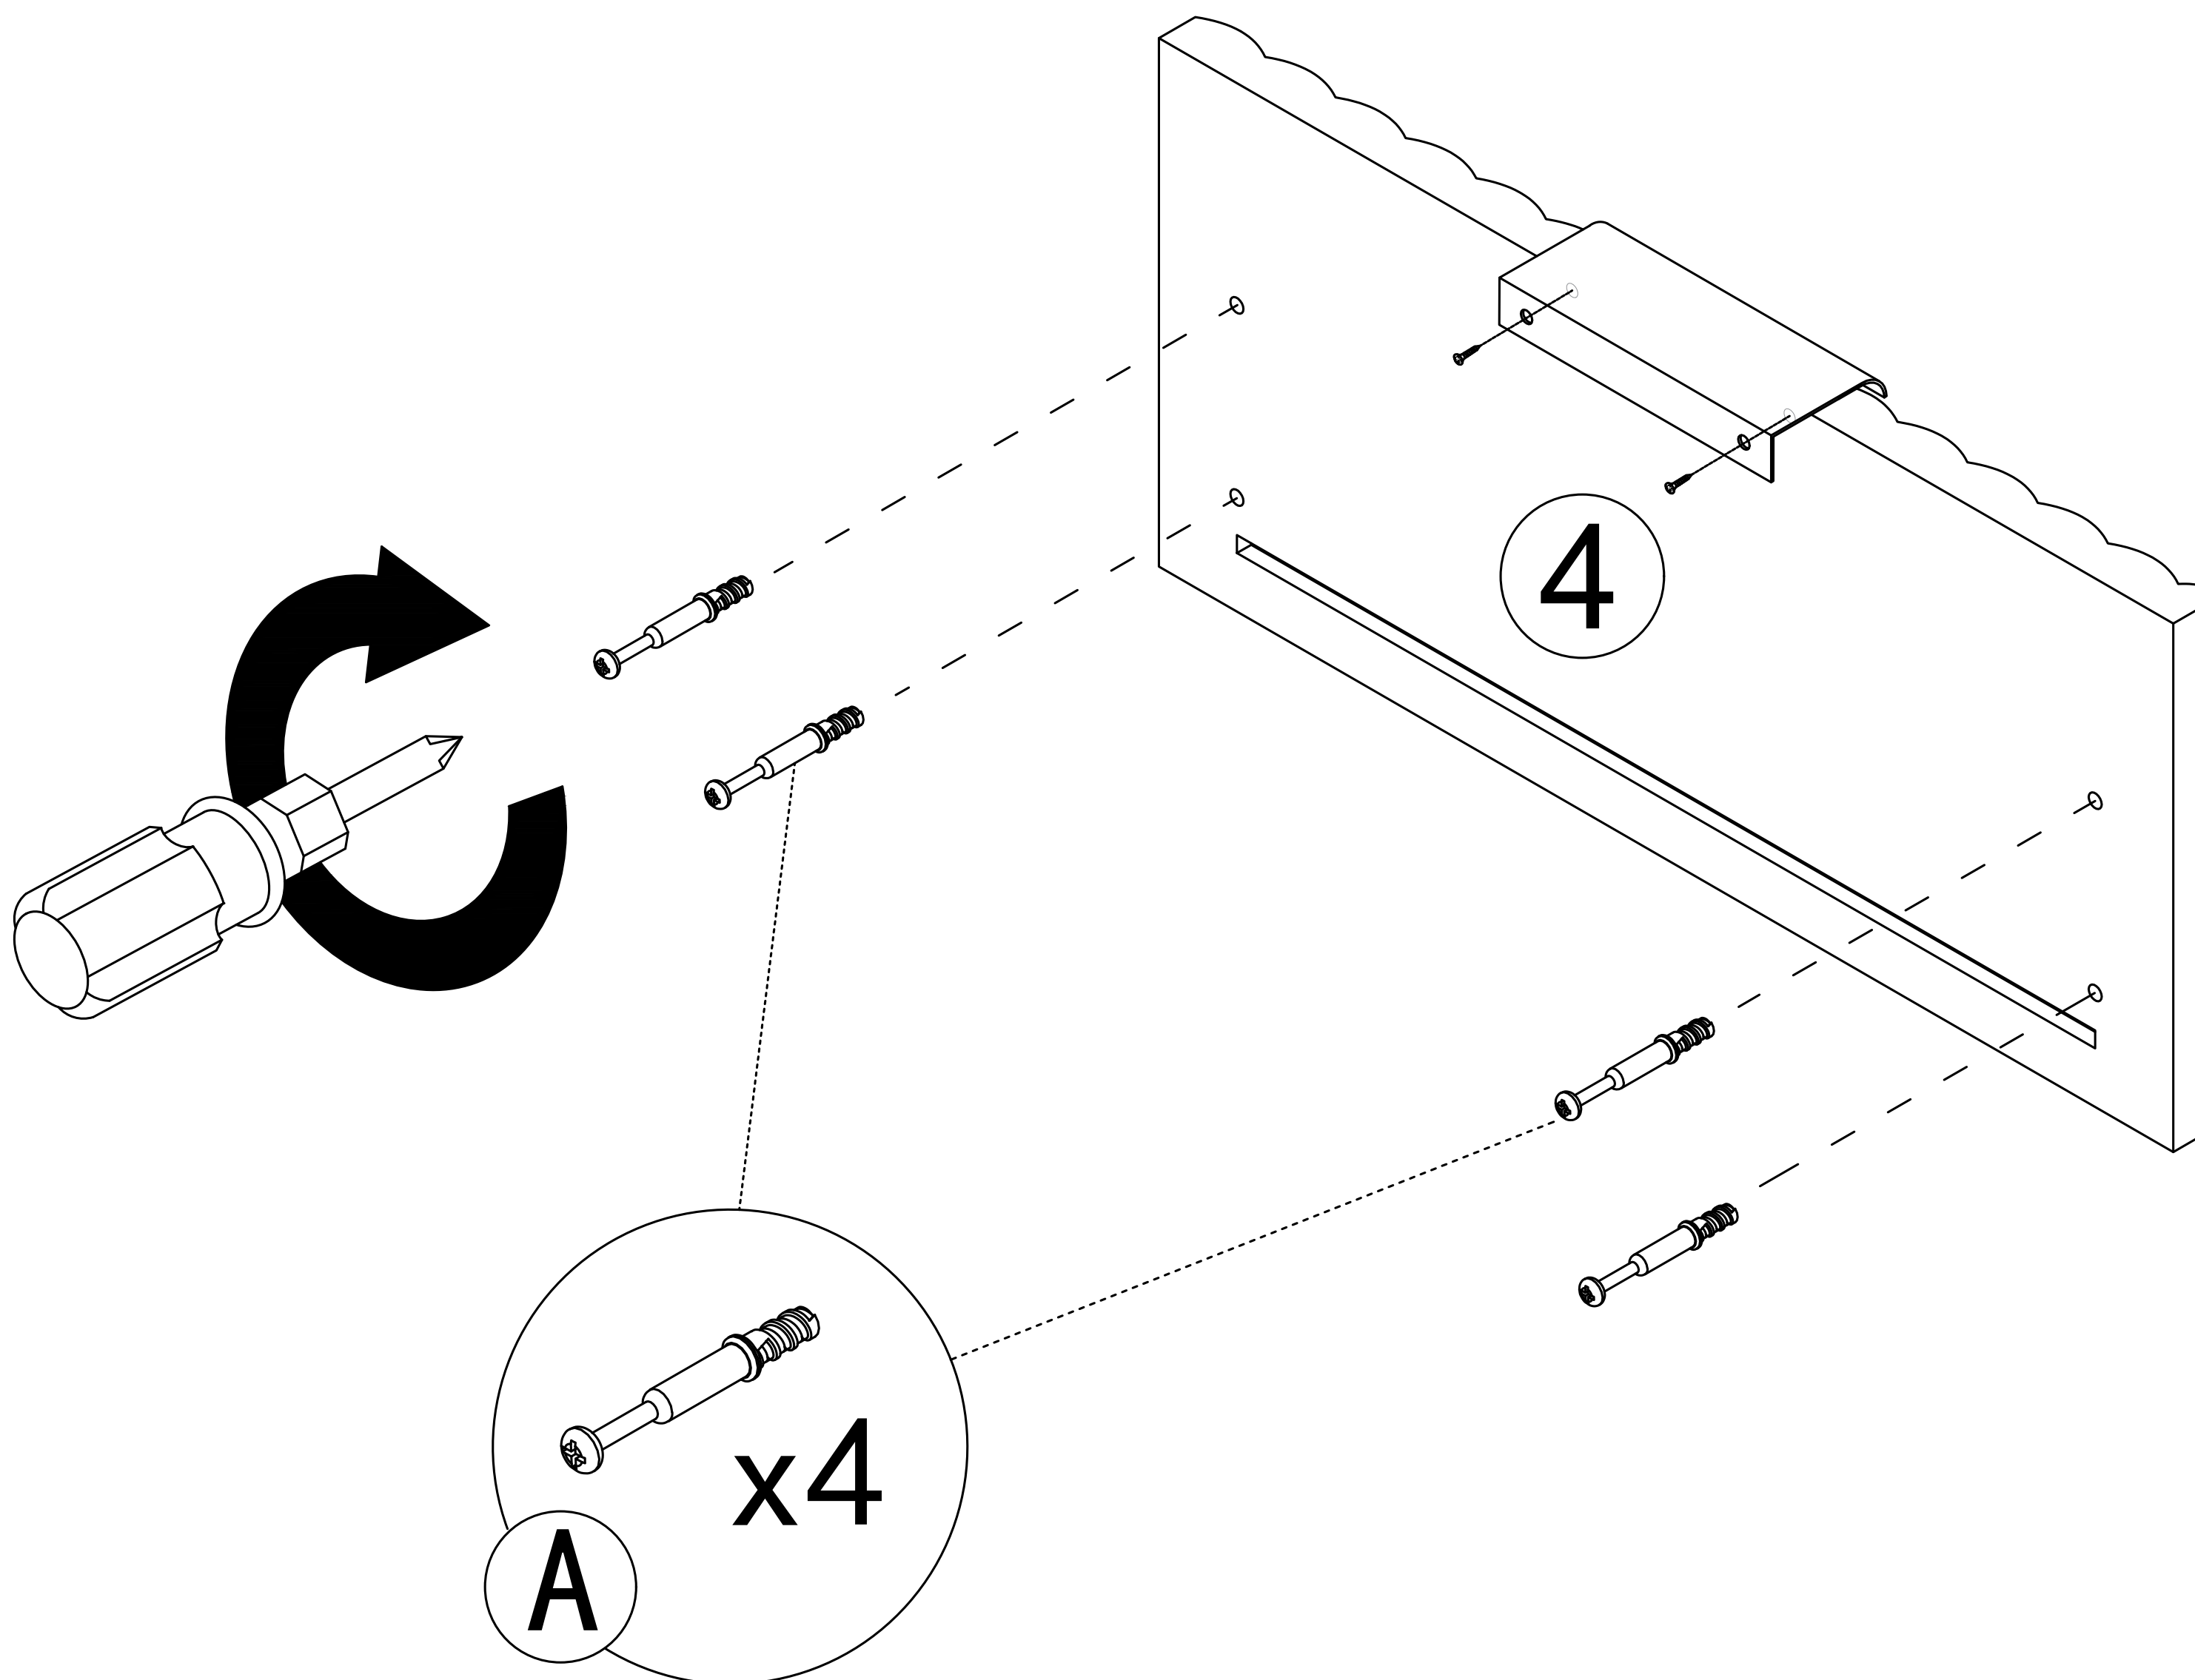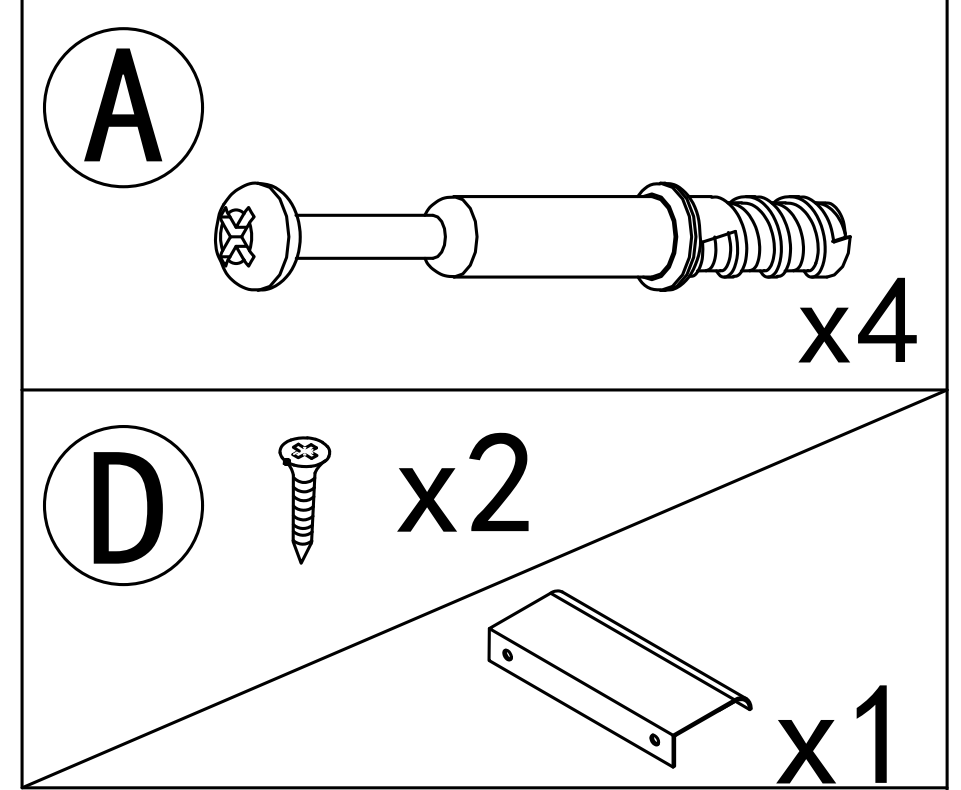


Step 5

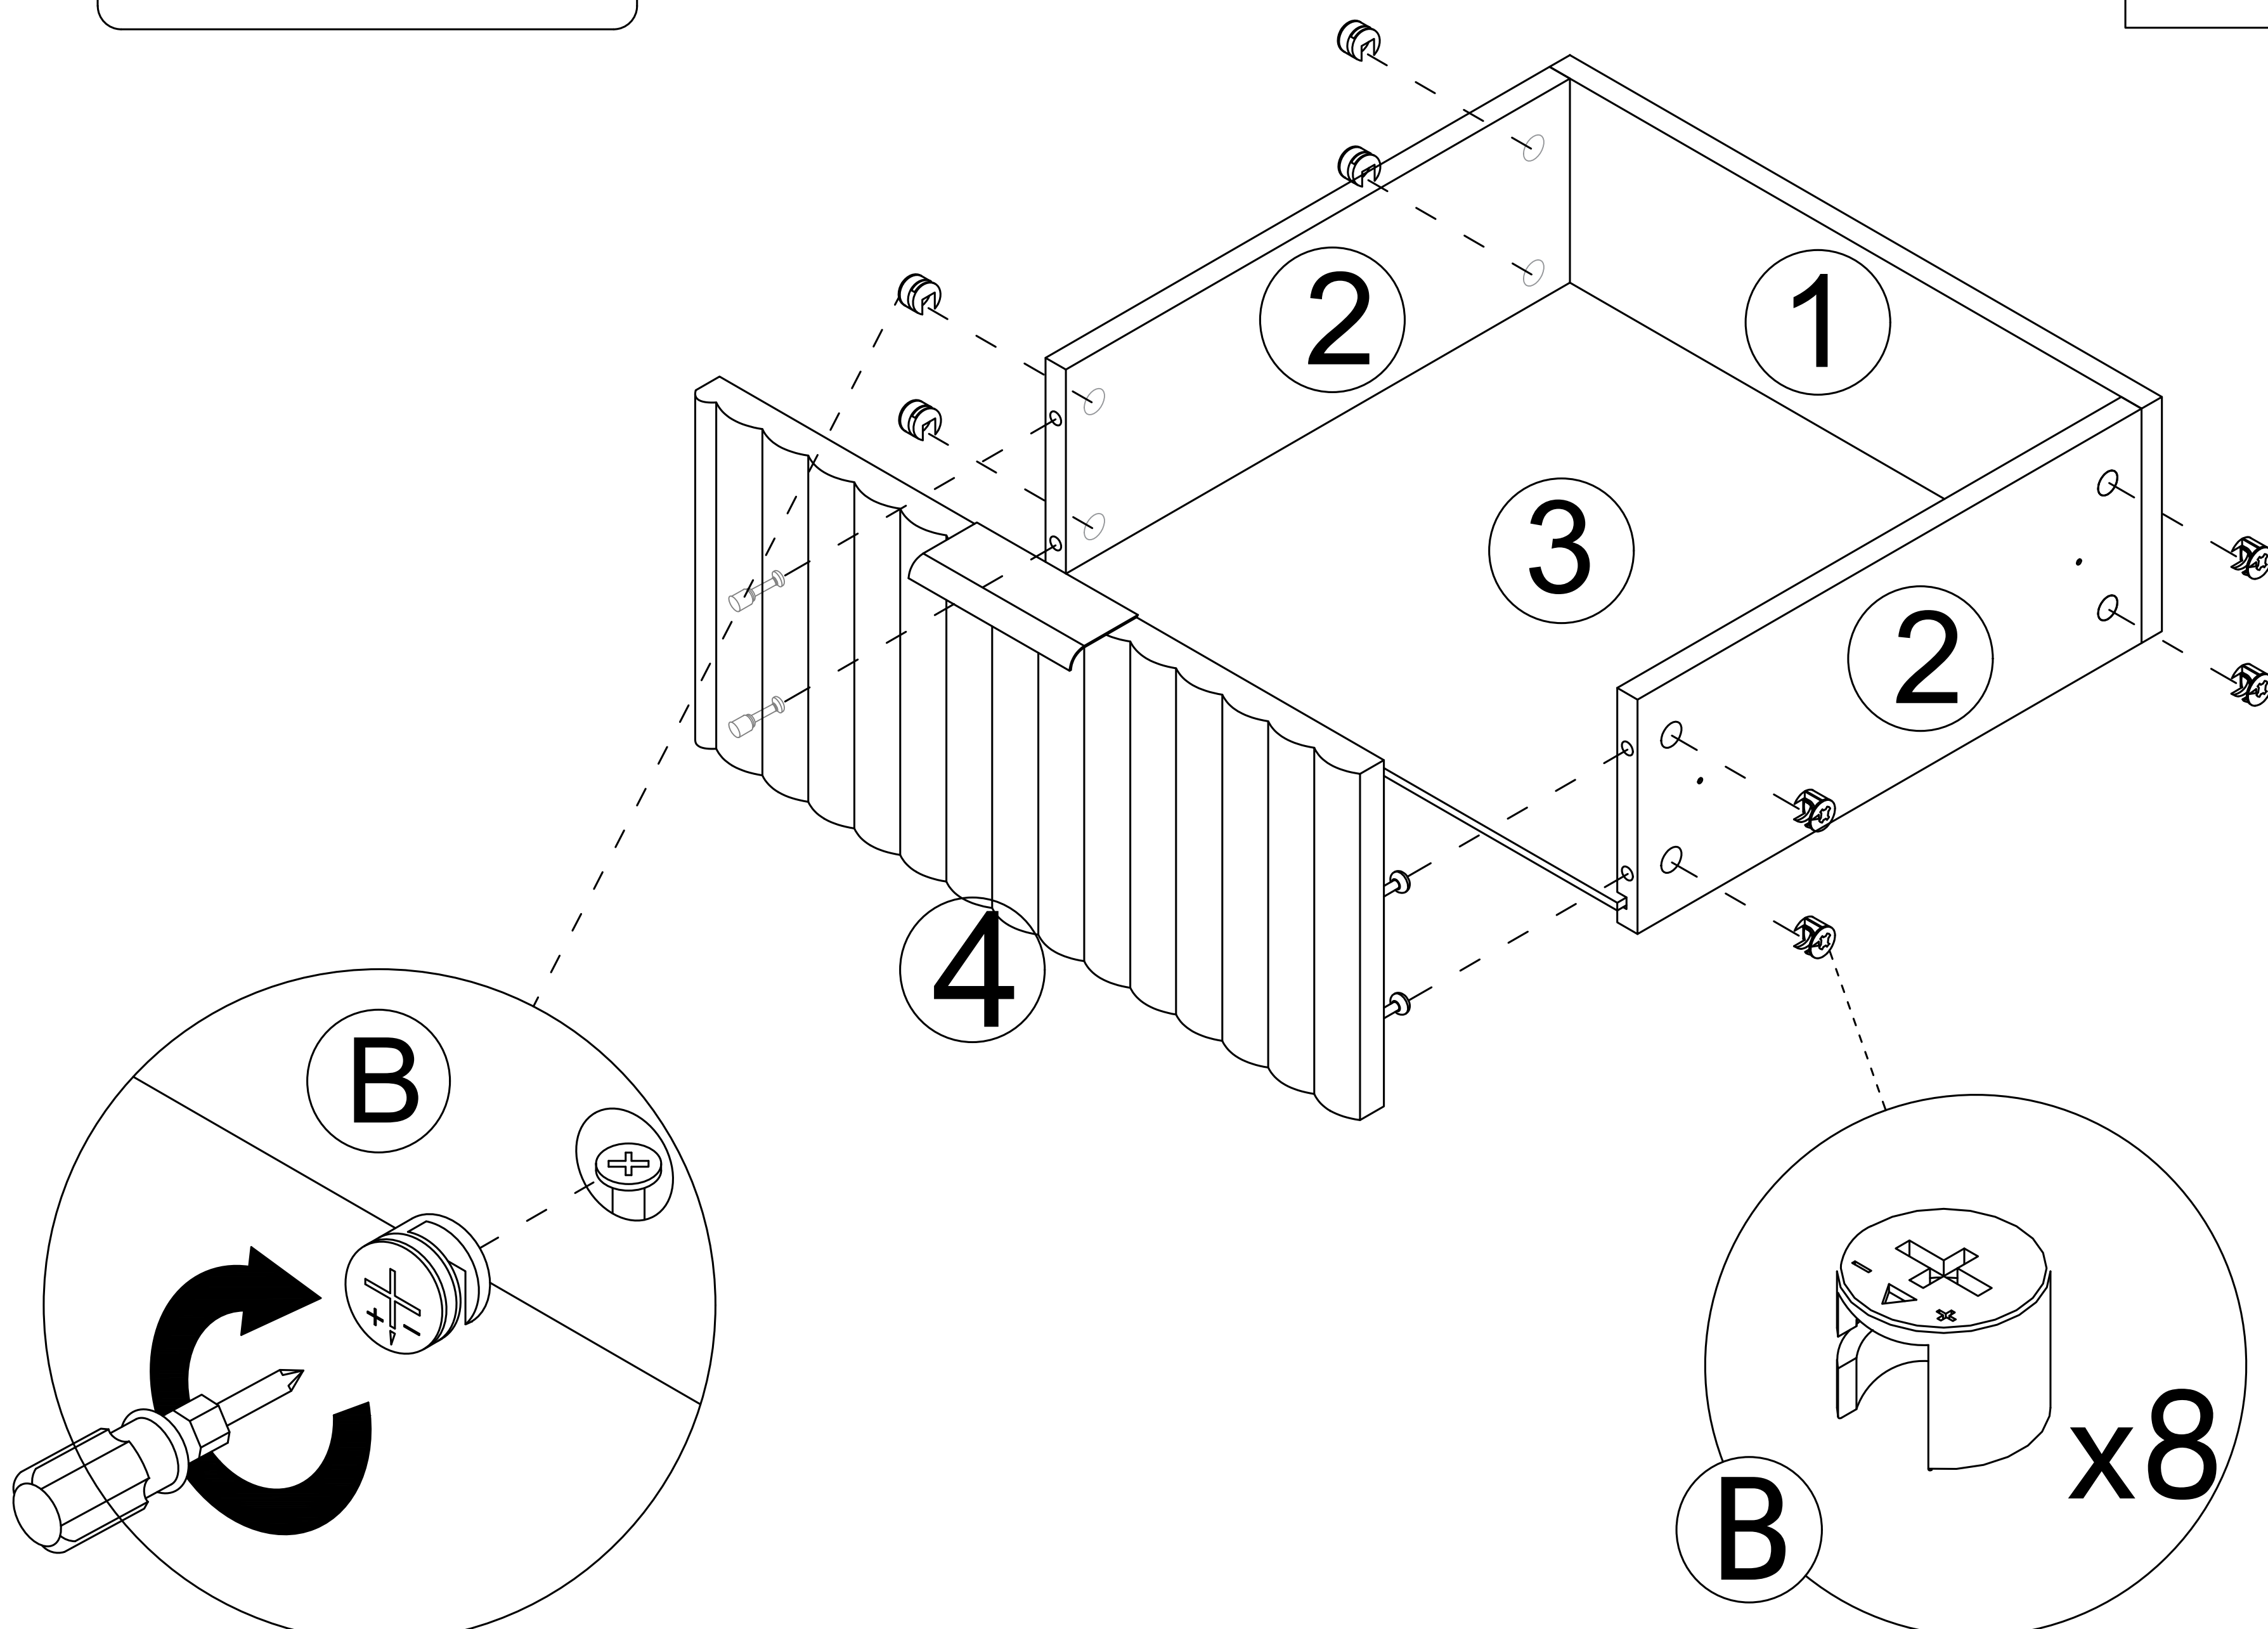
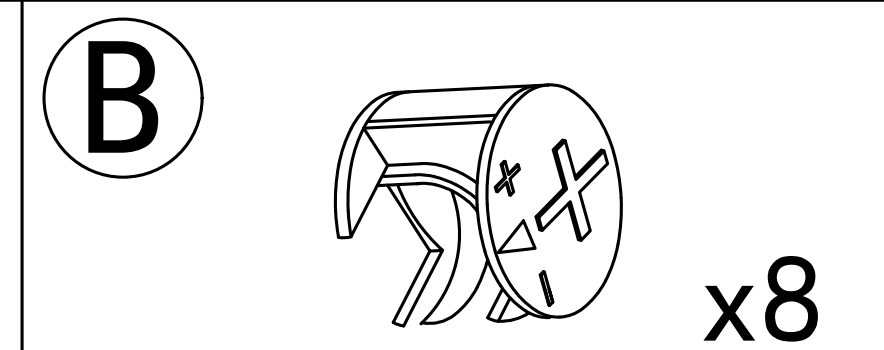


Use parts **E**






Drawer rail breakdown diagram

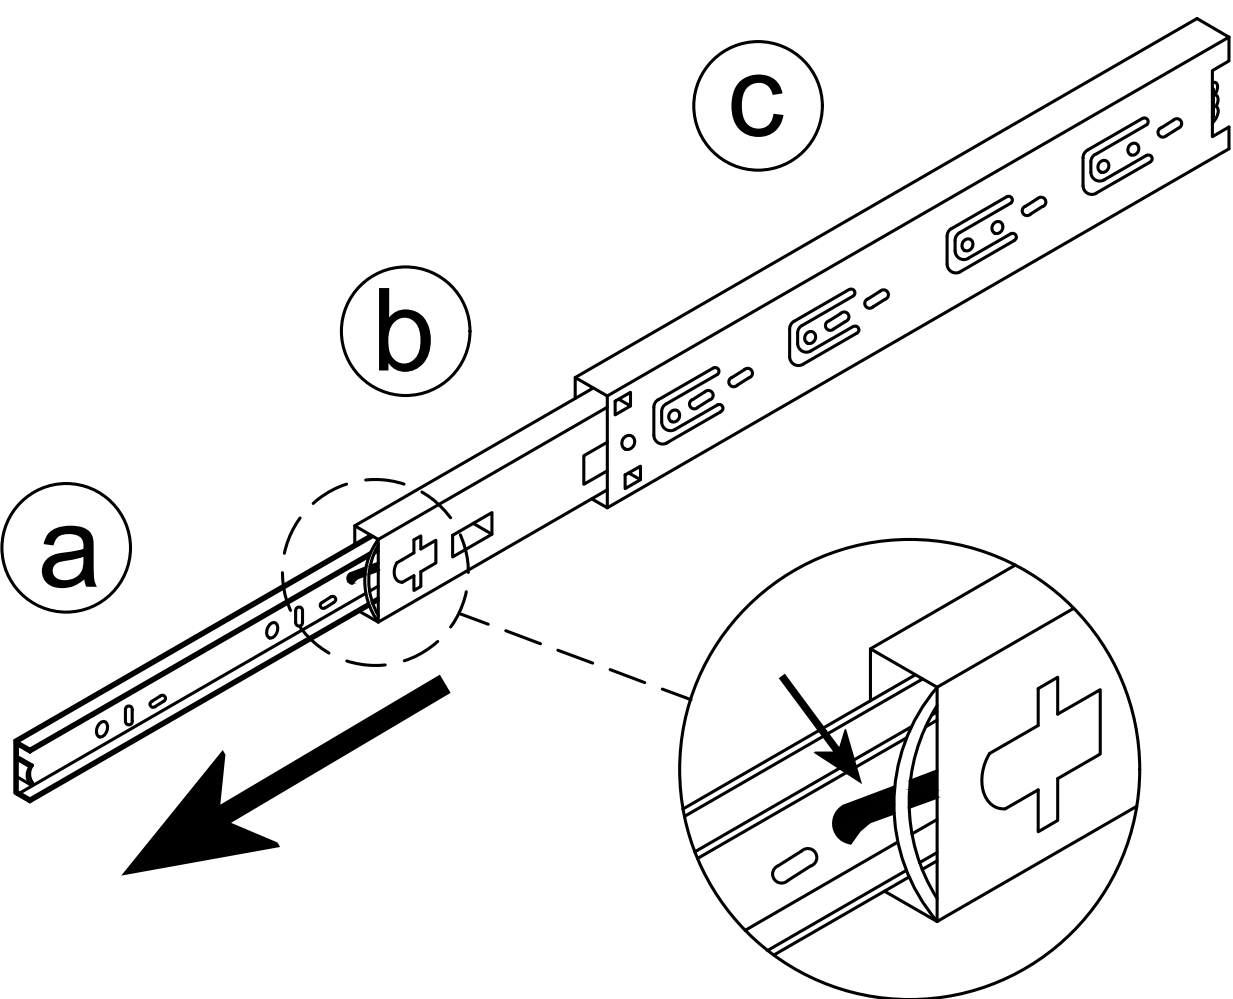

Step 1 : Pull the rails apart
Step 2 : Push the nylon buckle outward **a**

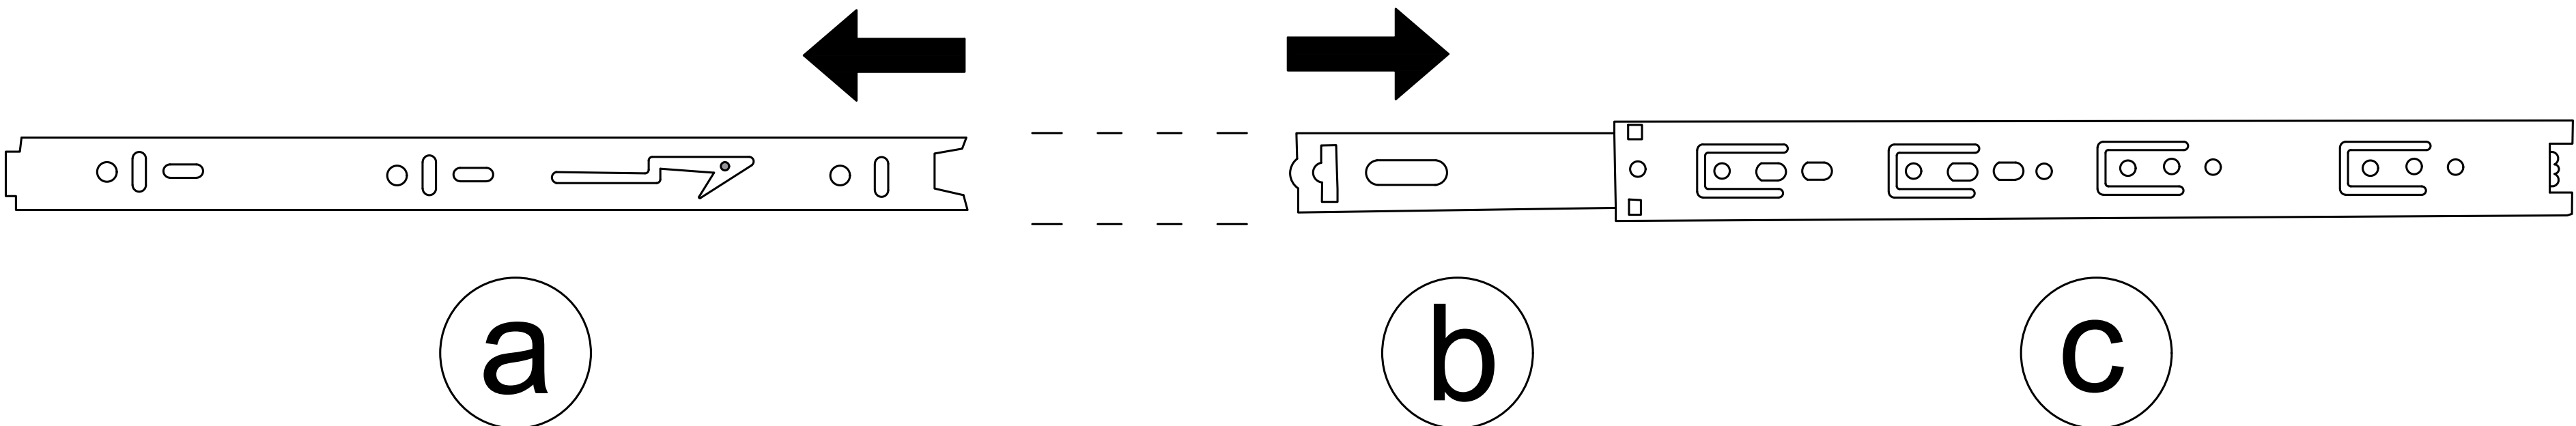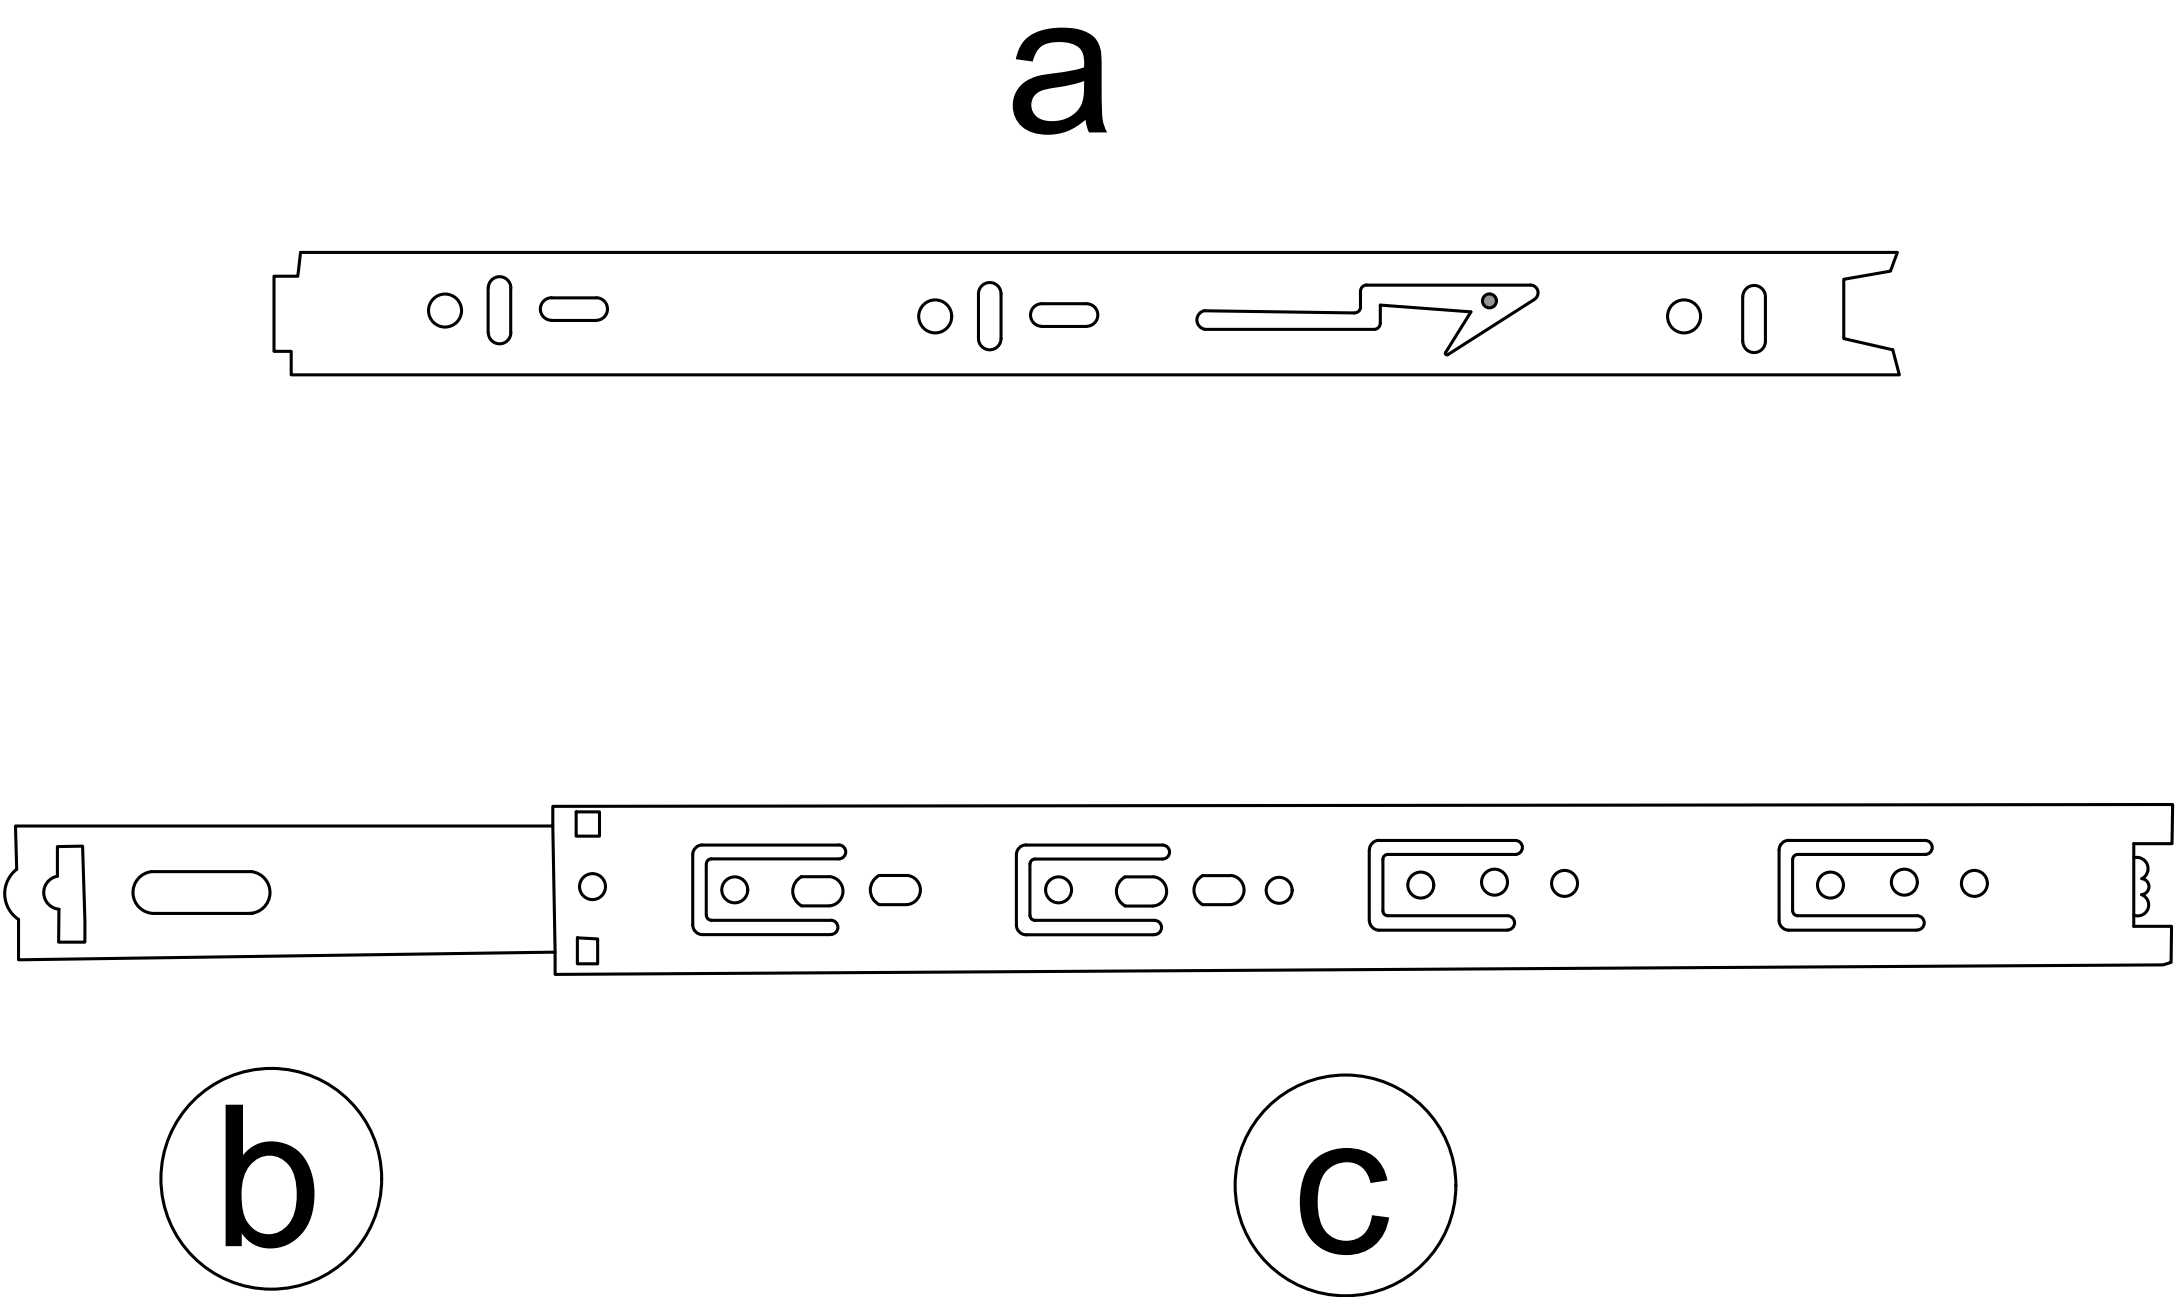


Step 6

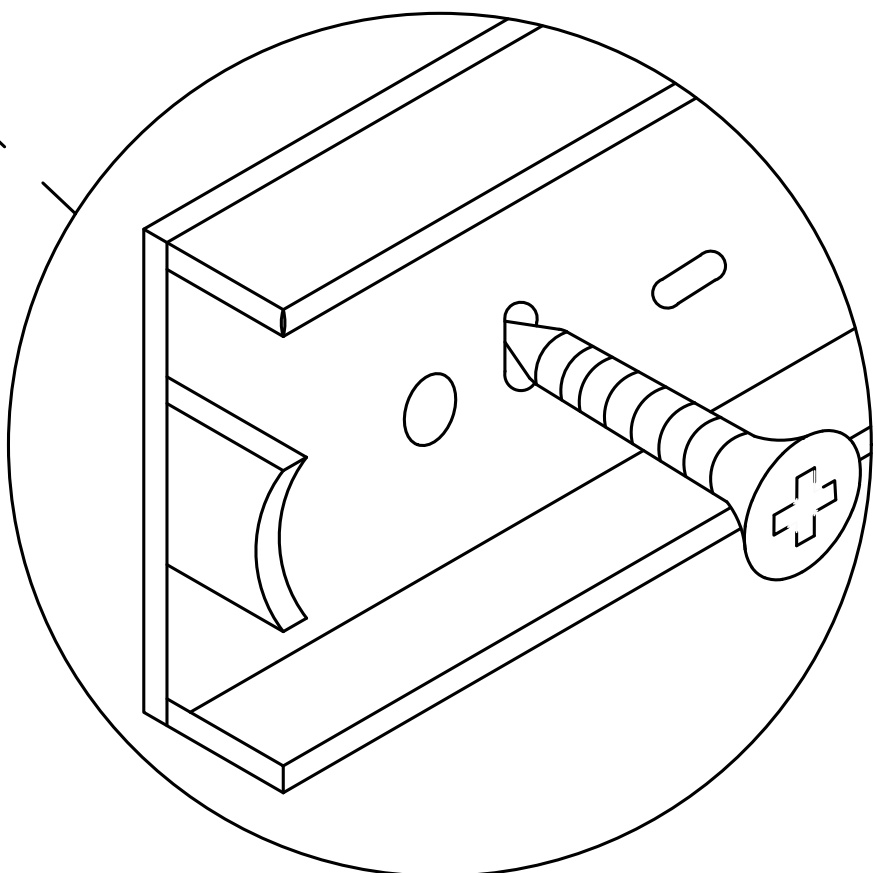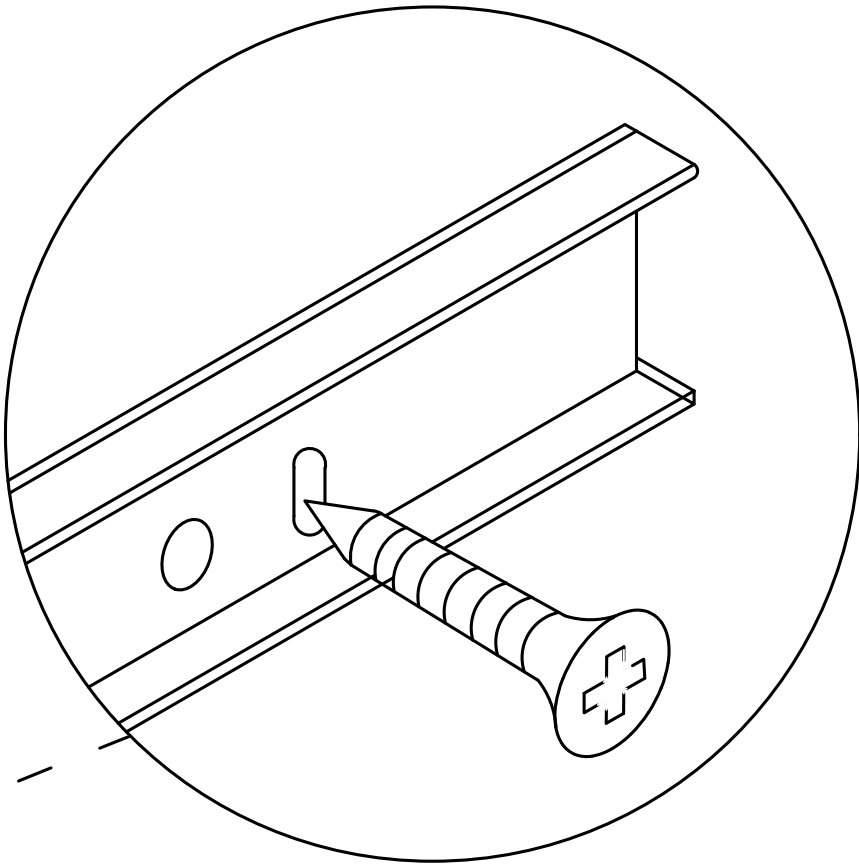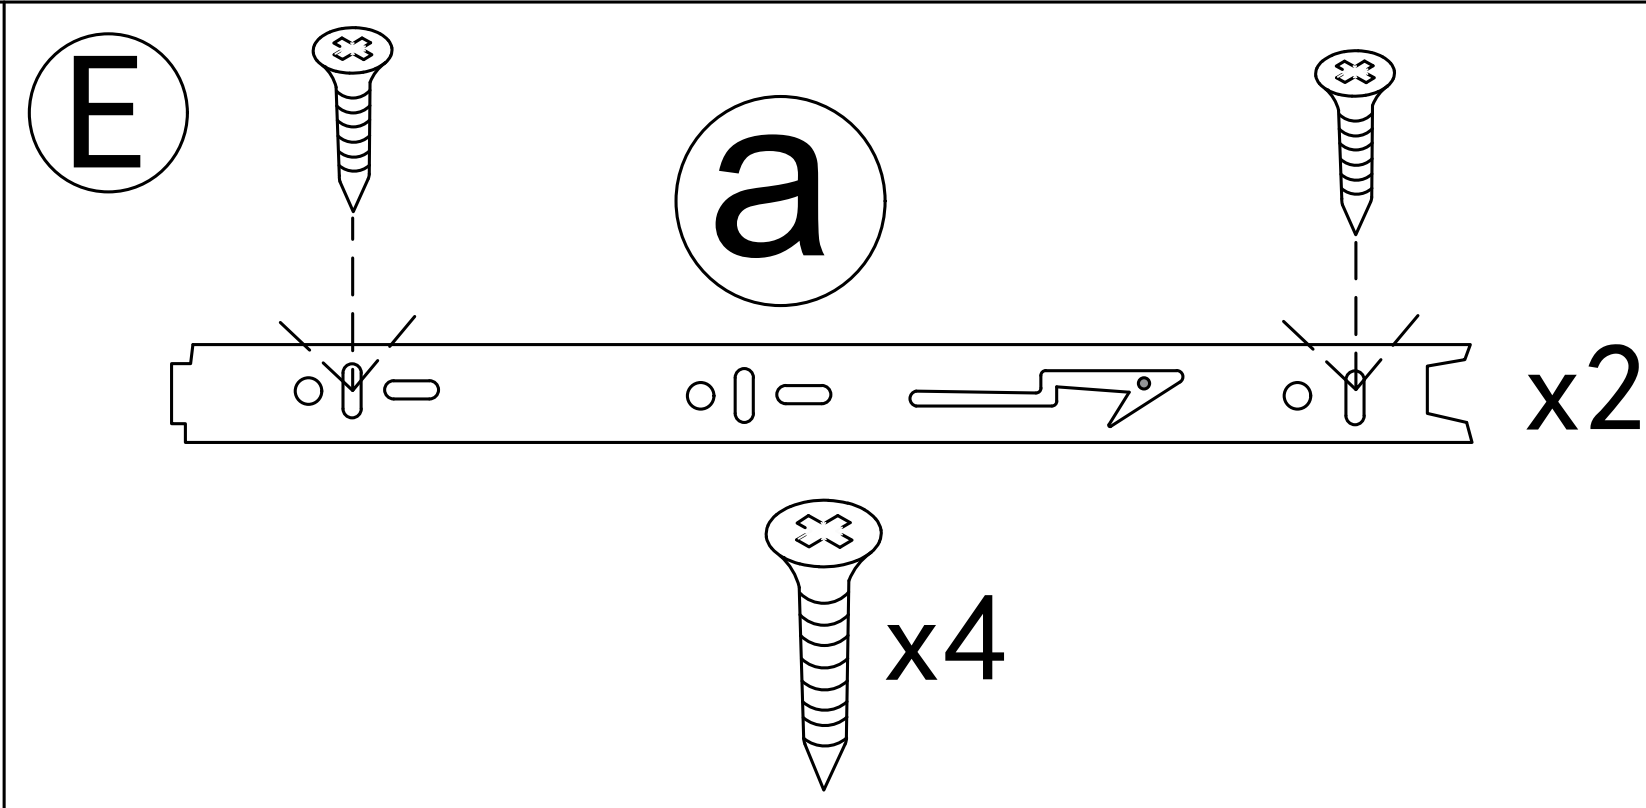
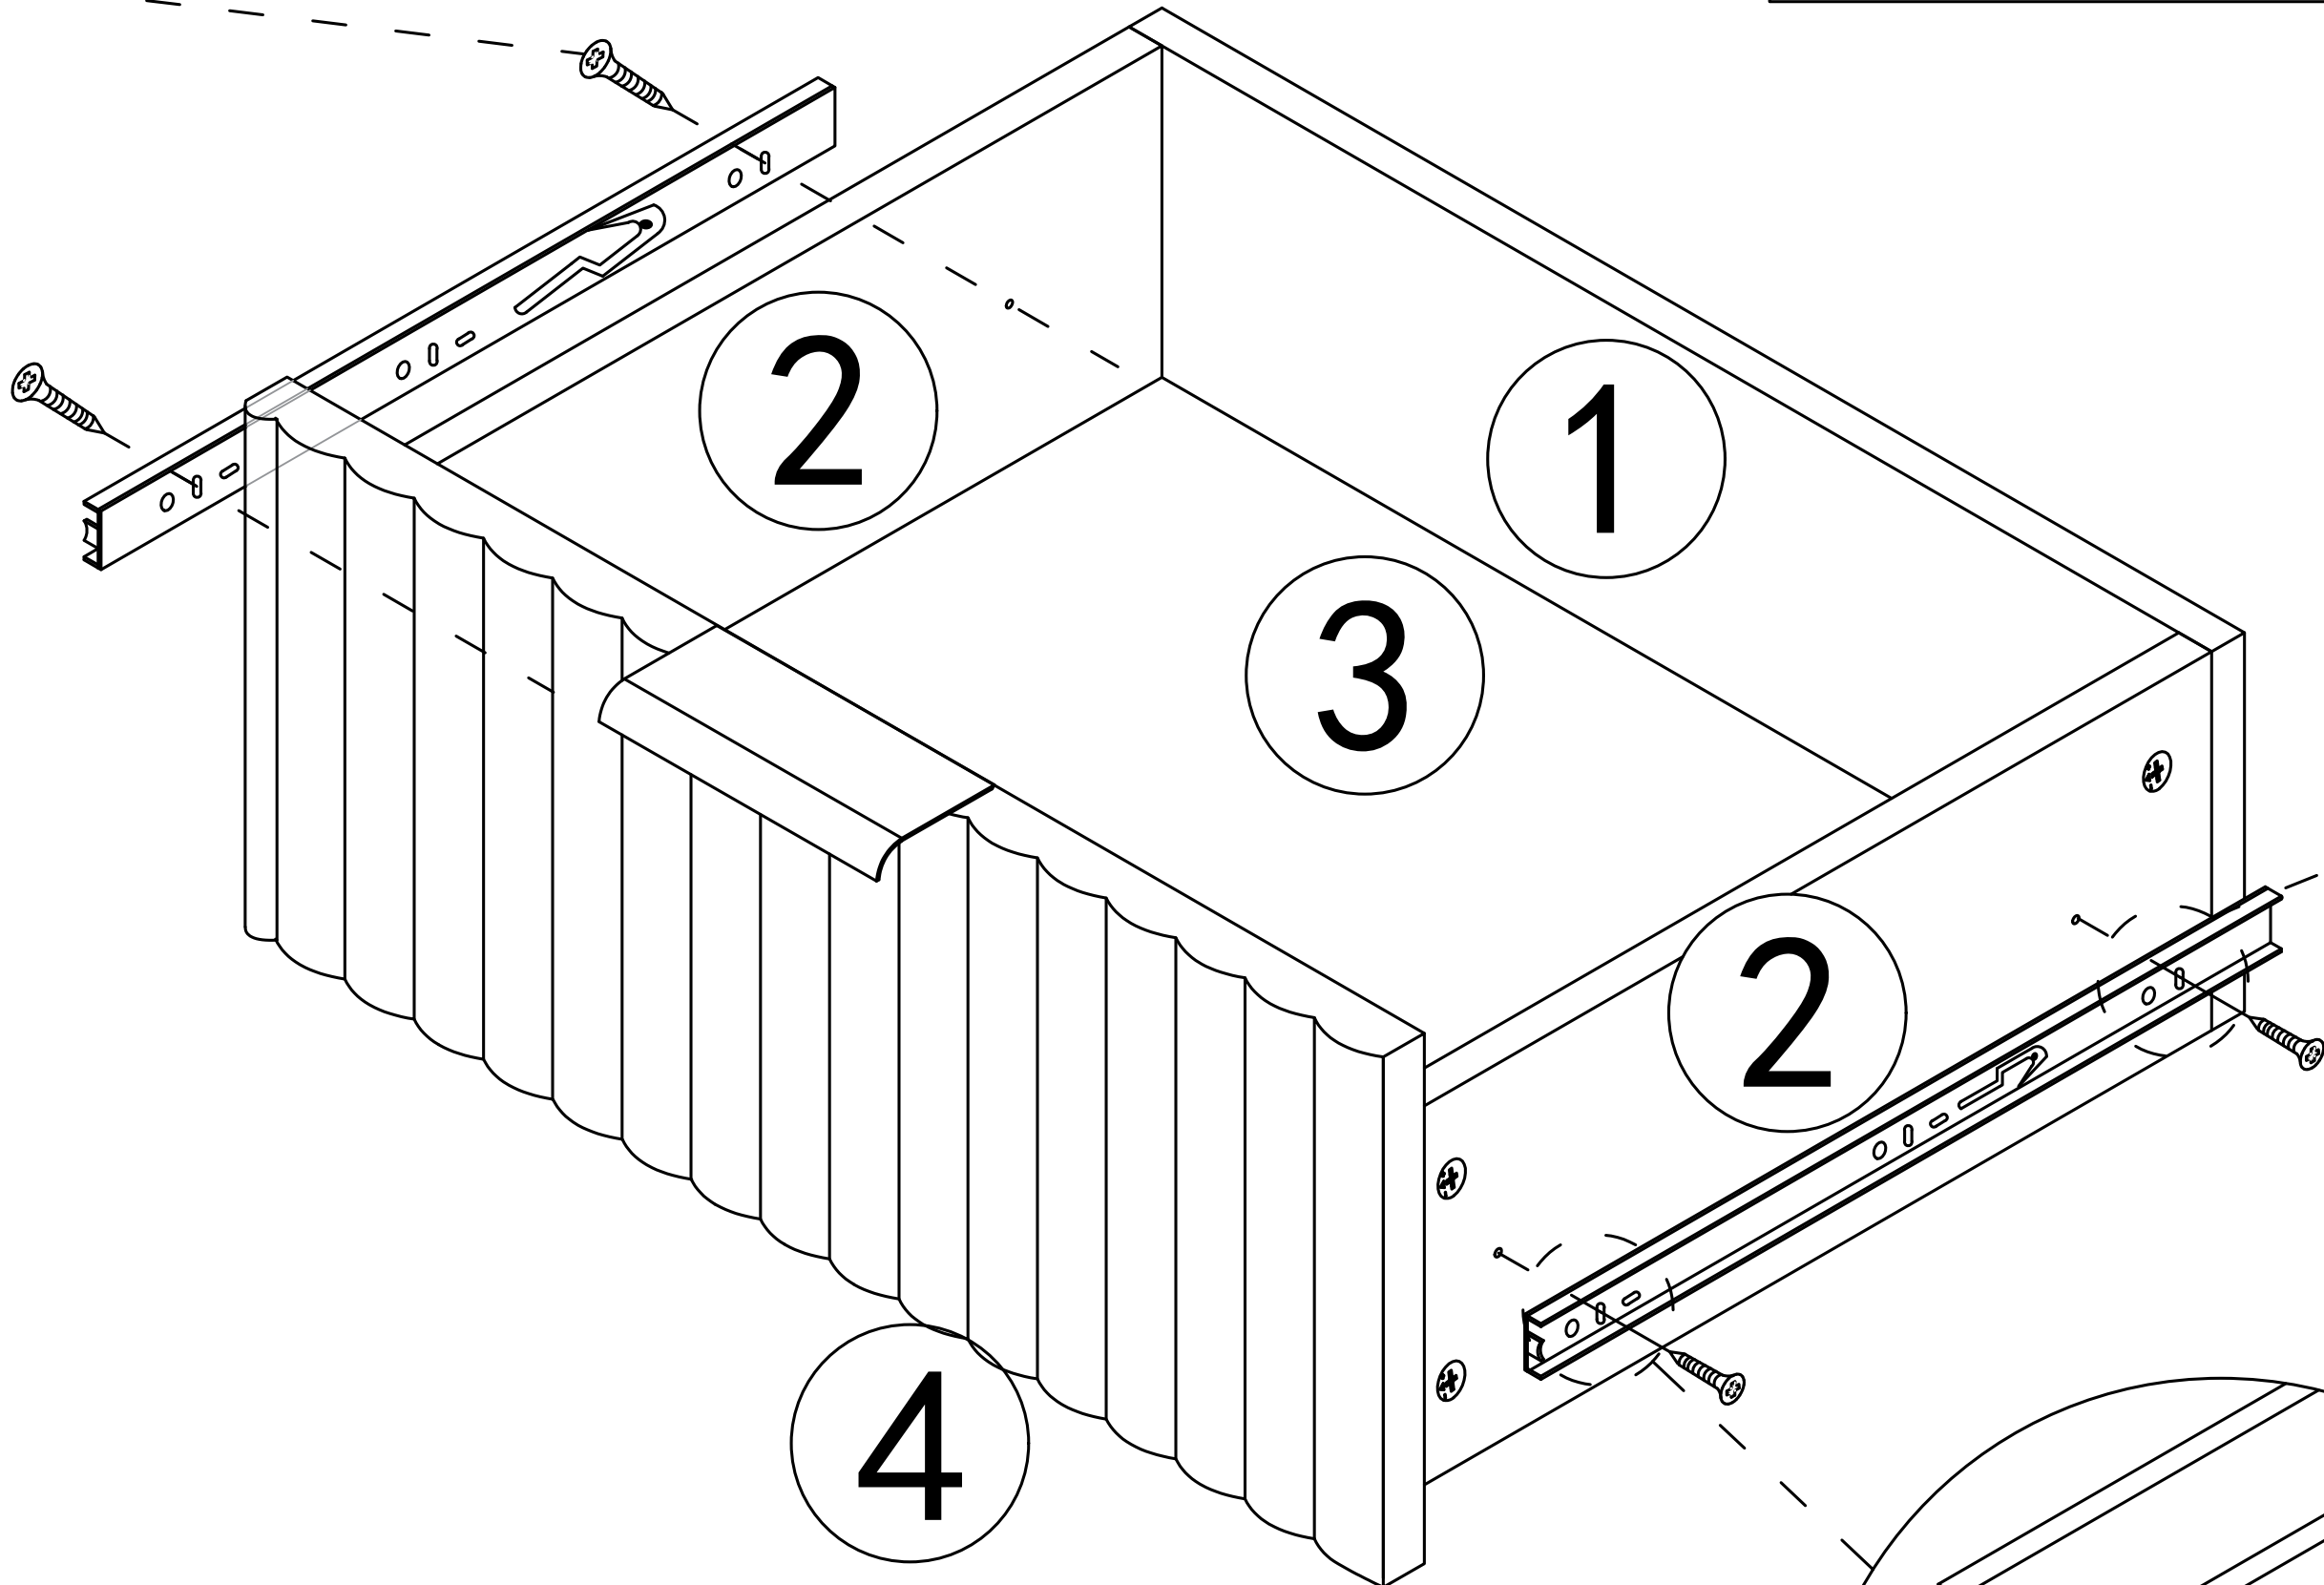
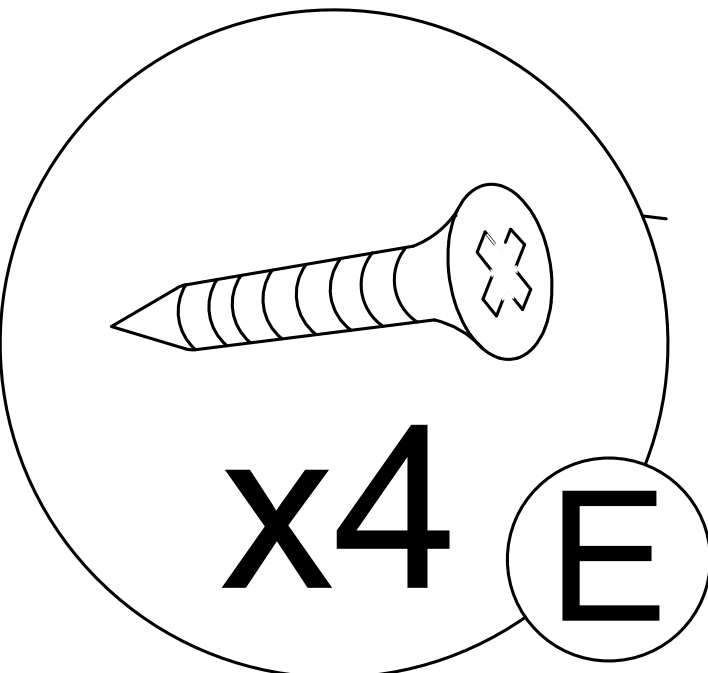


Step 7


G



x4

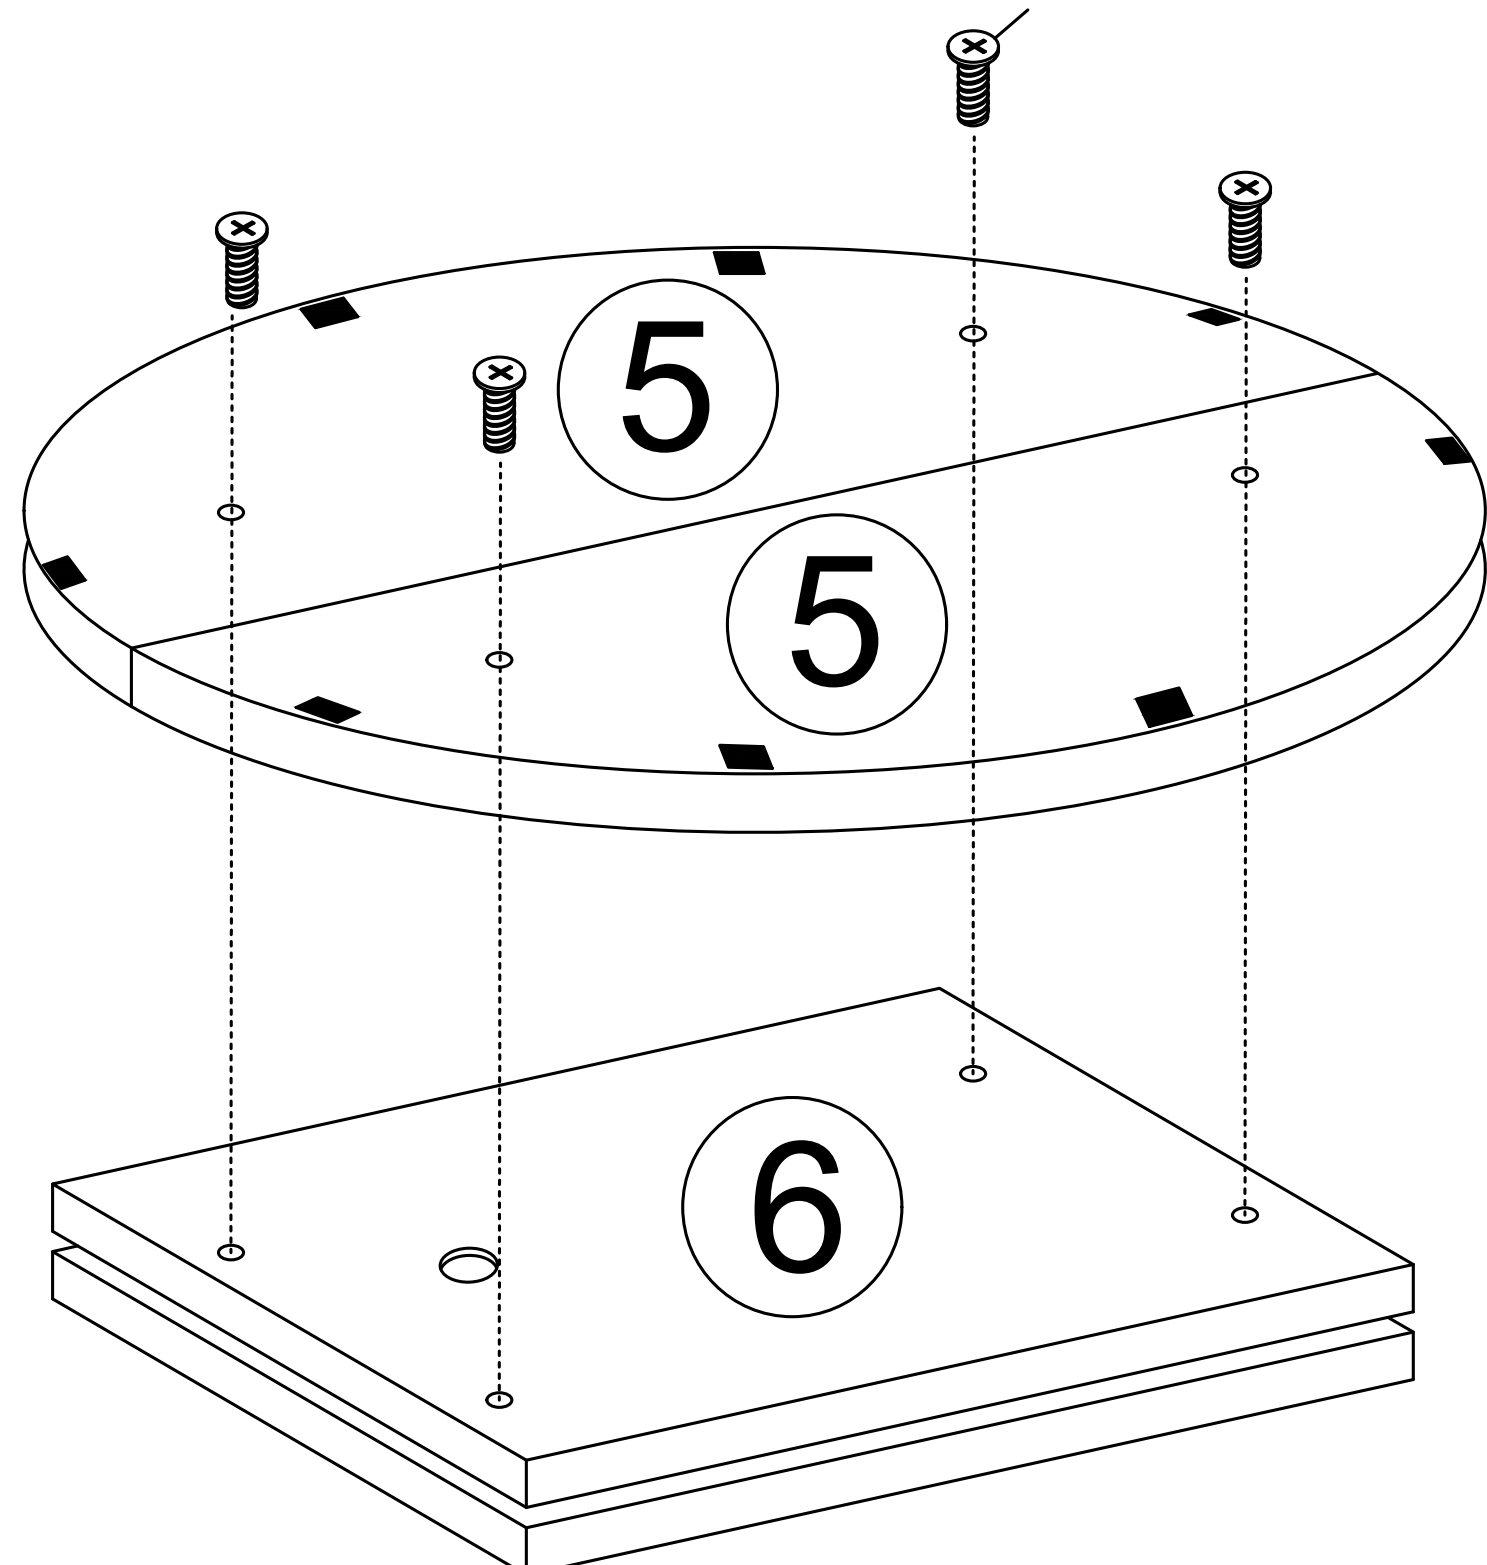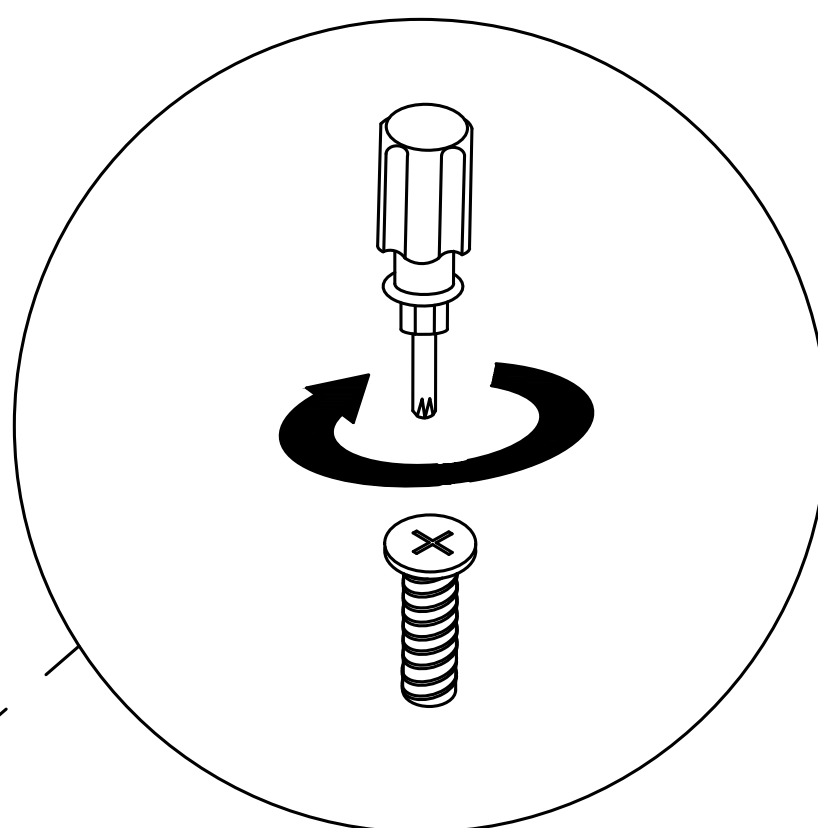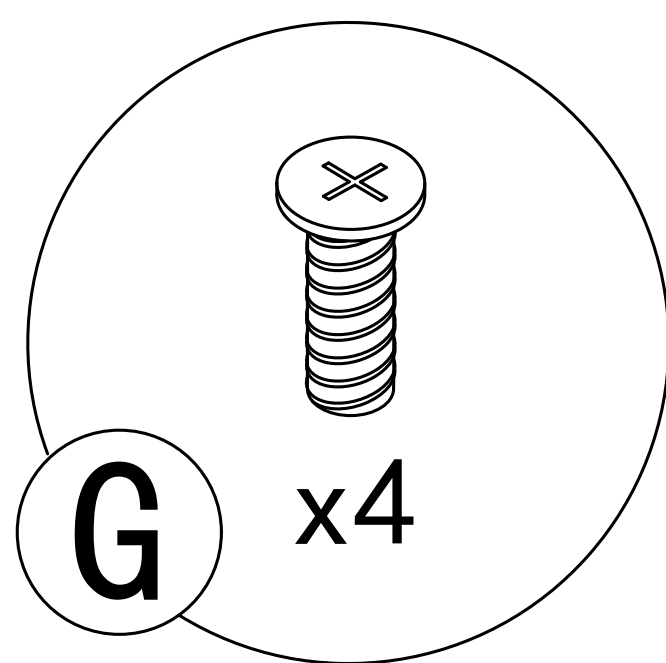


Turn the plank and
screw it on

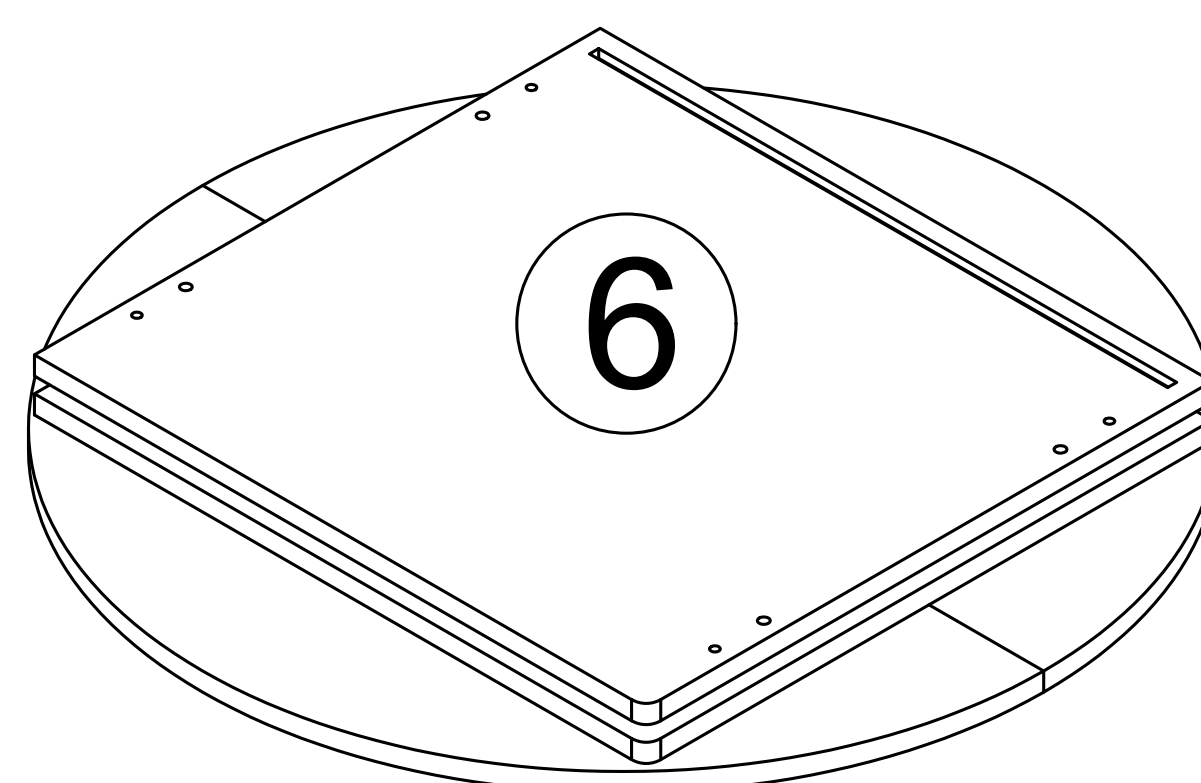


Step 8

A

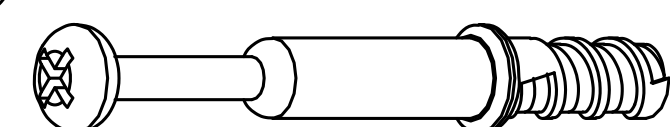


x4

C

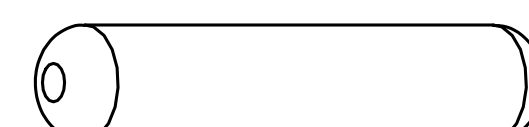

x4

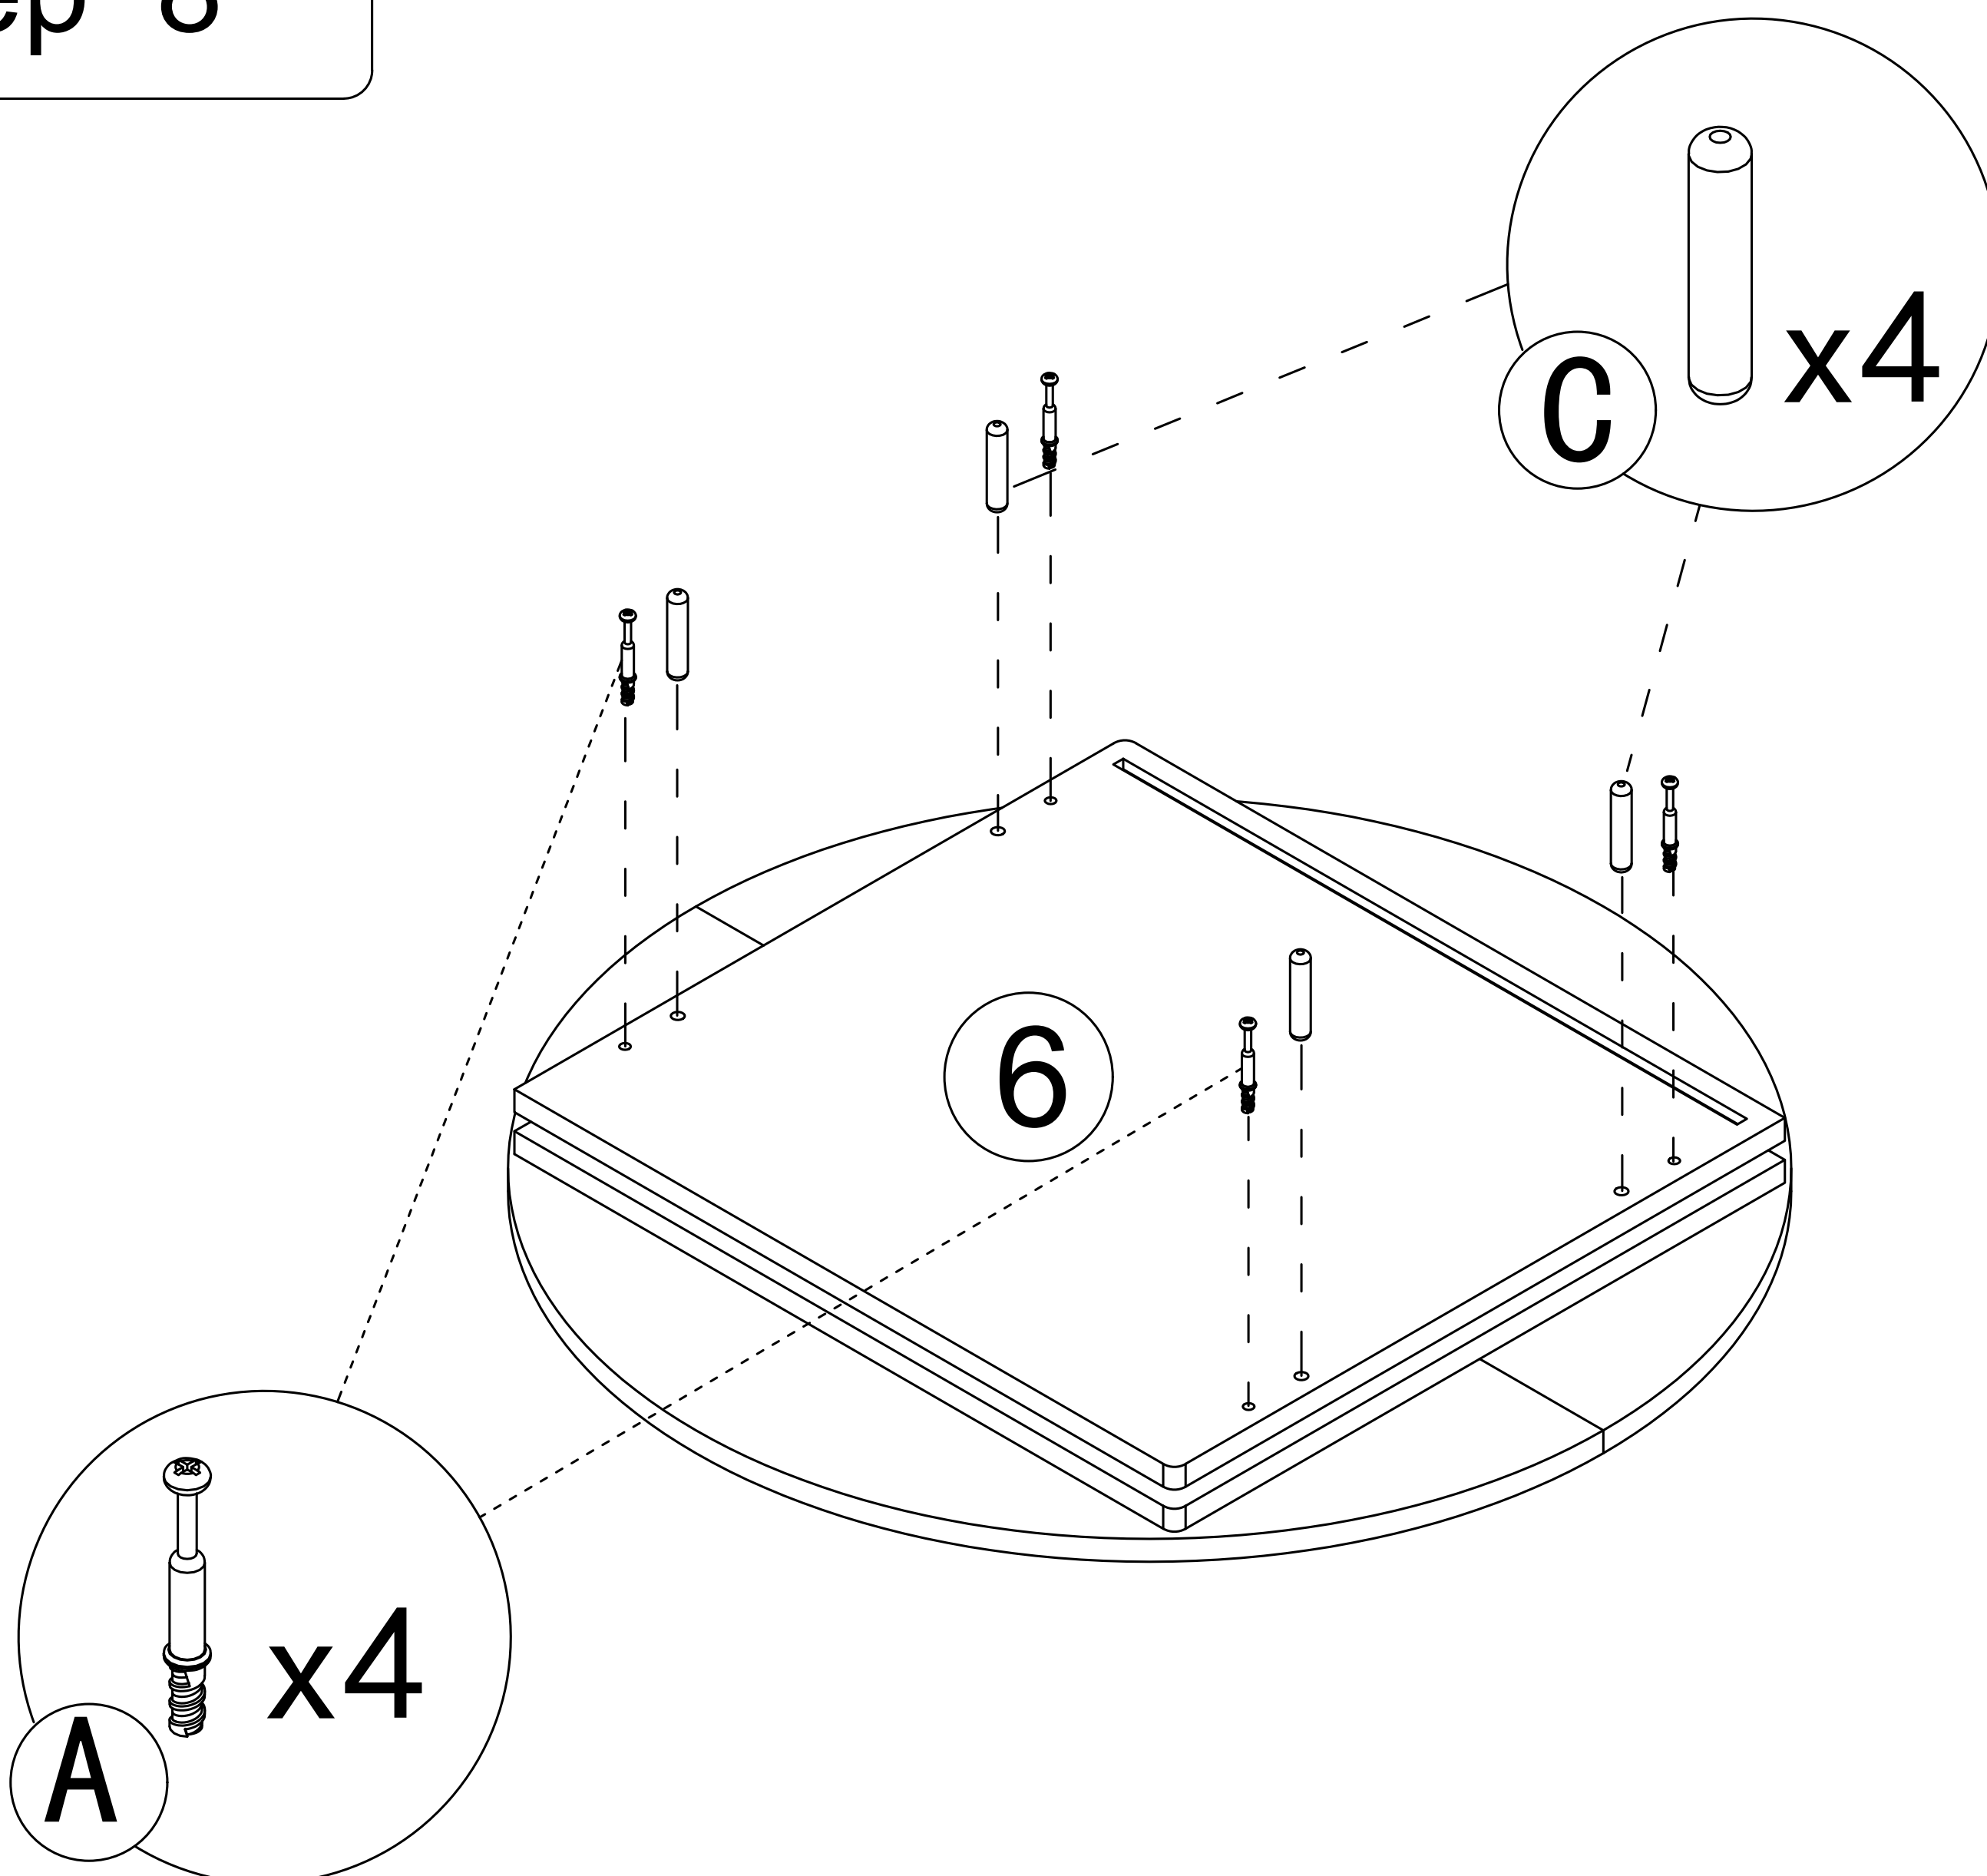


A

x4


7

Step 9

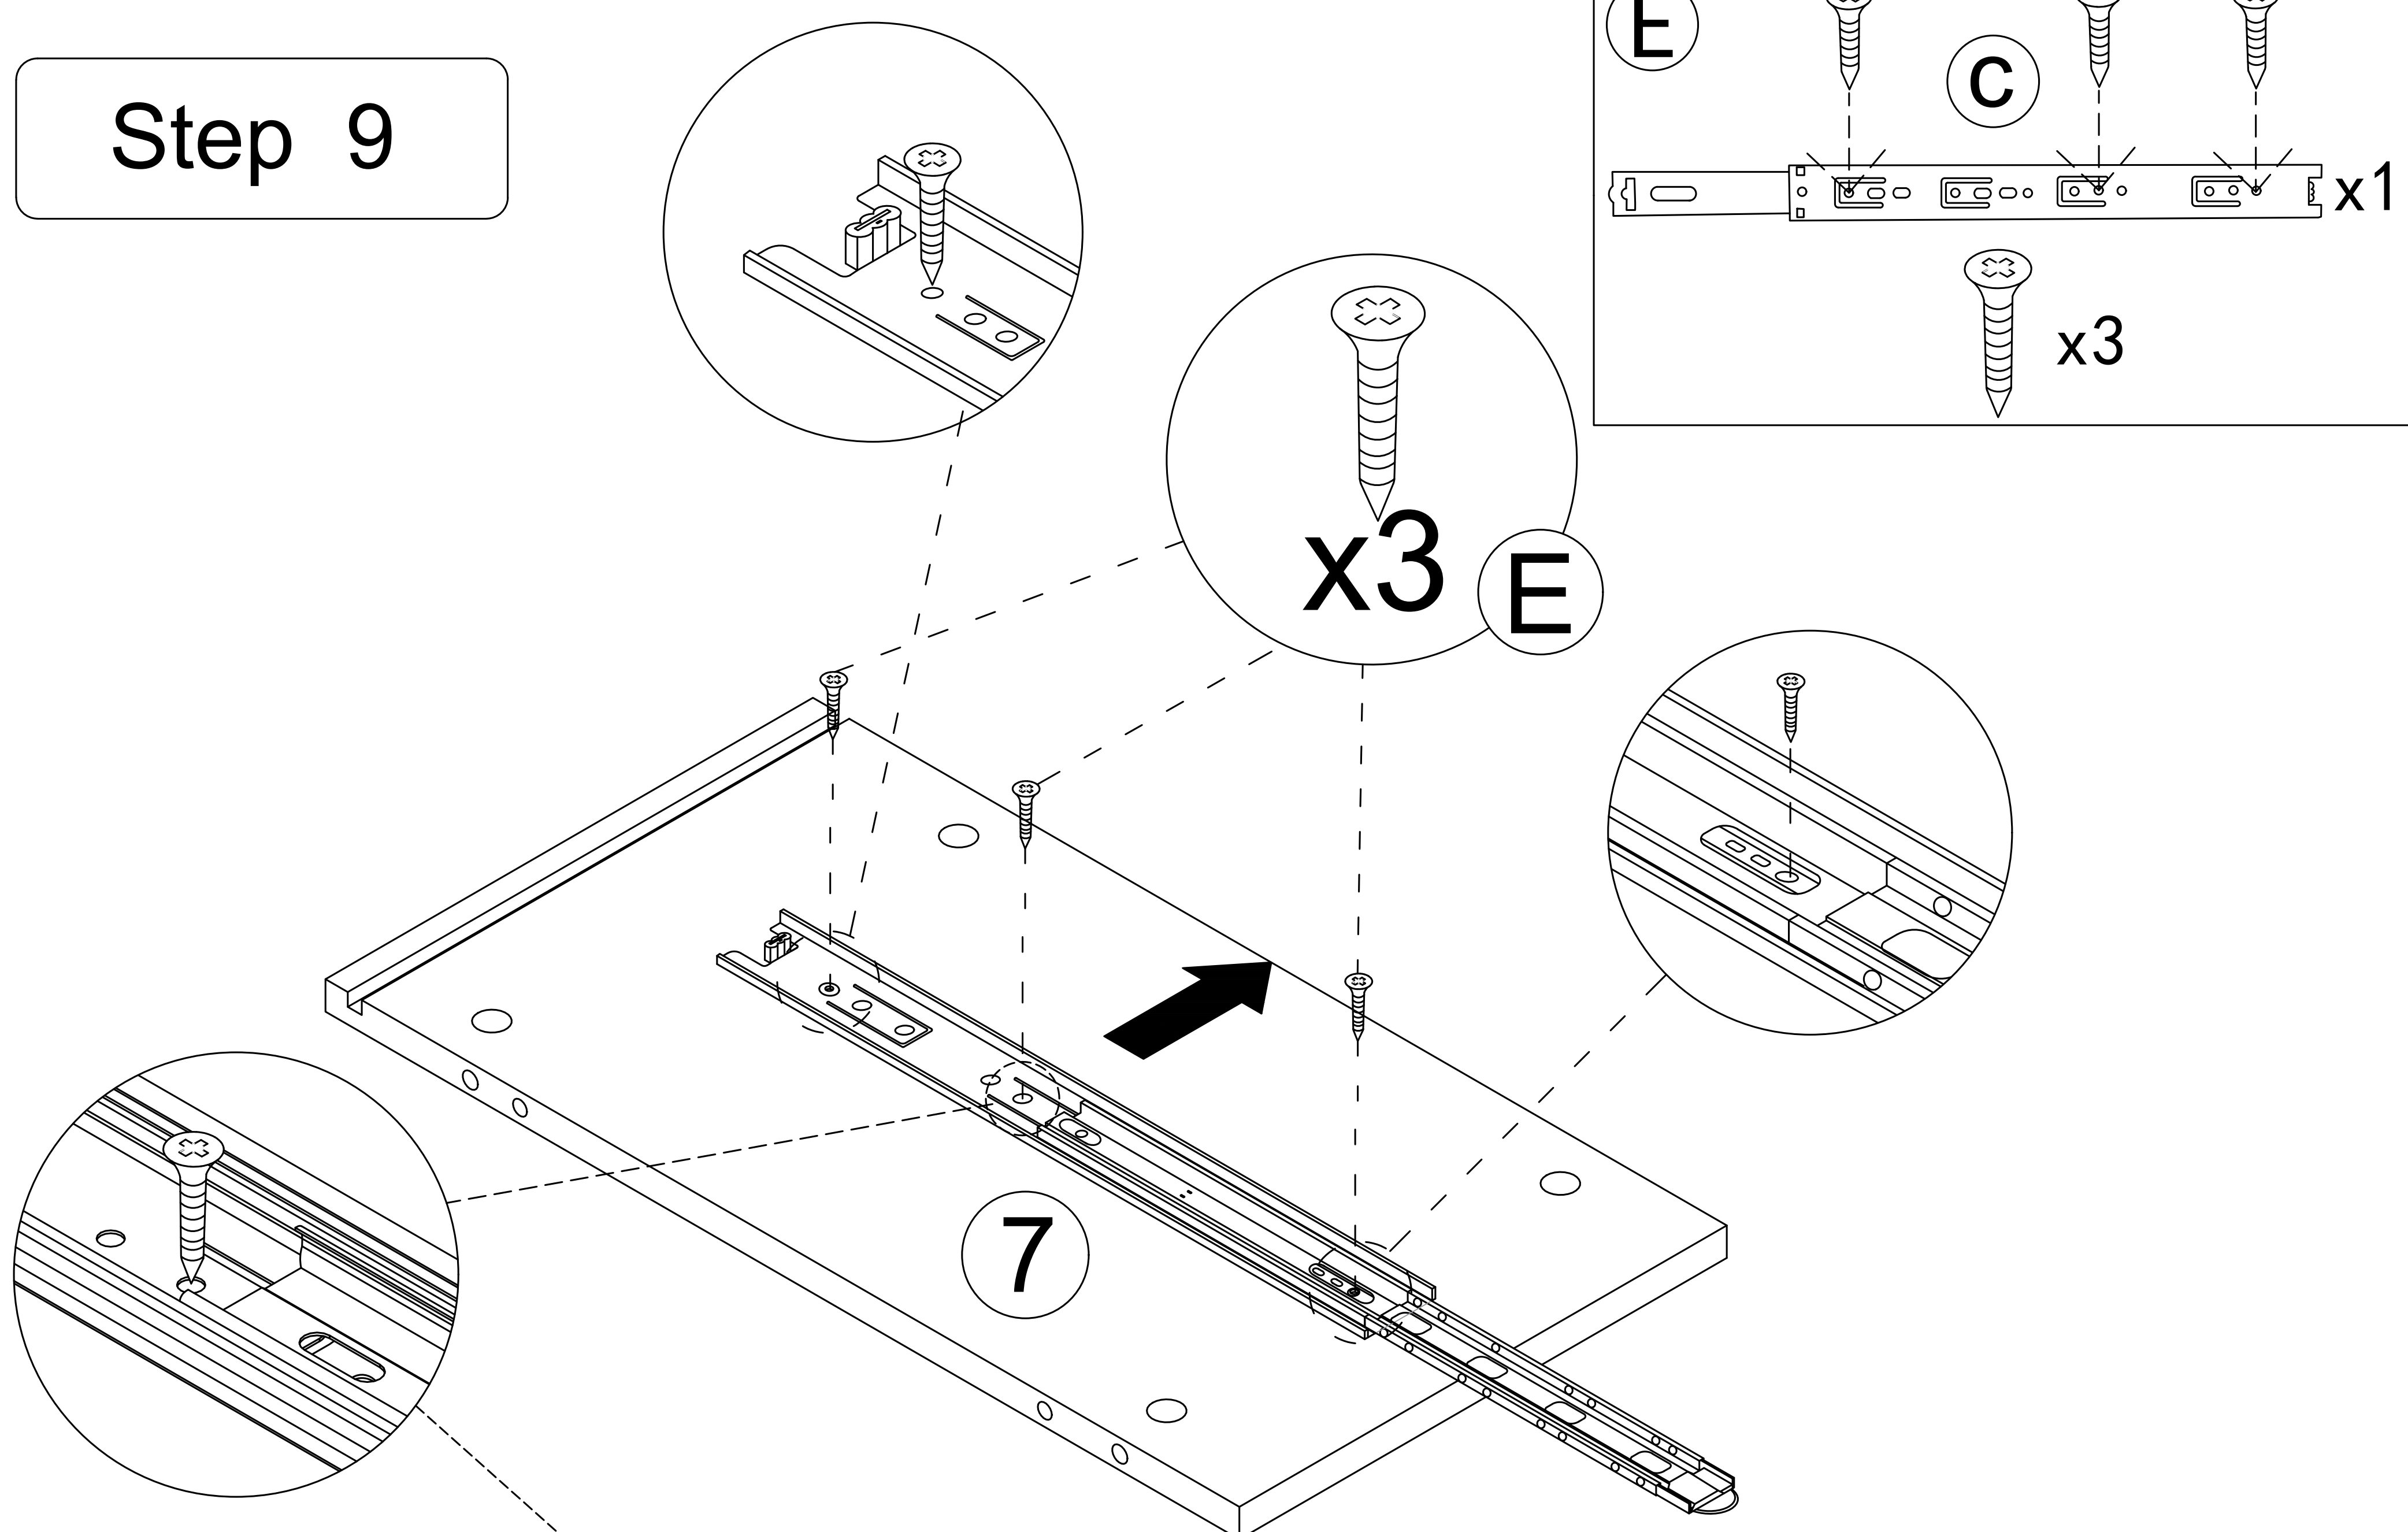




This hole is for strengthening fixed hole customers can choose to install according to their needs.

Step 10





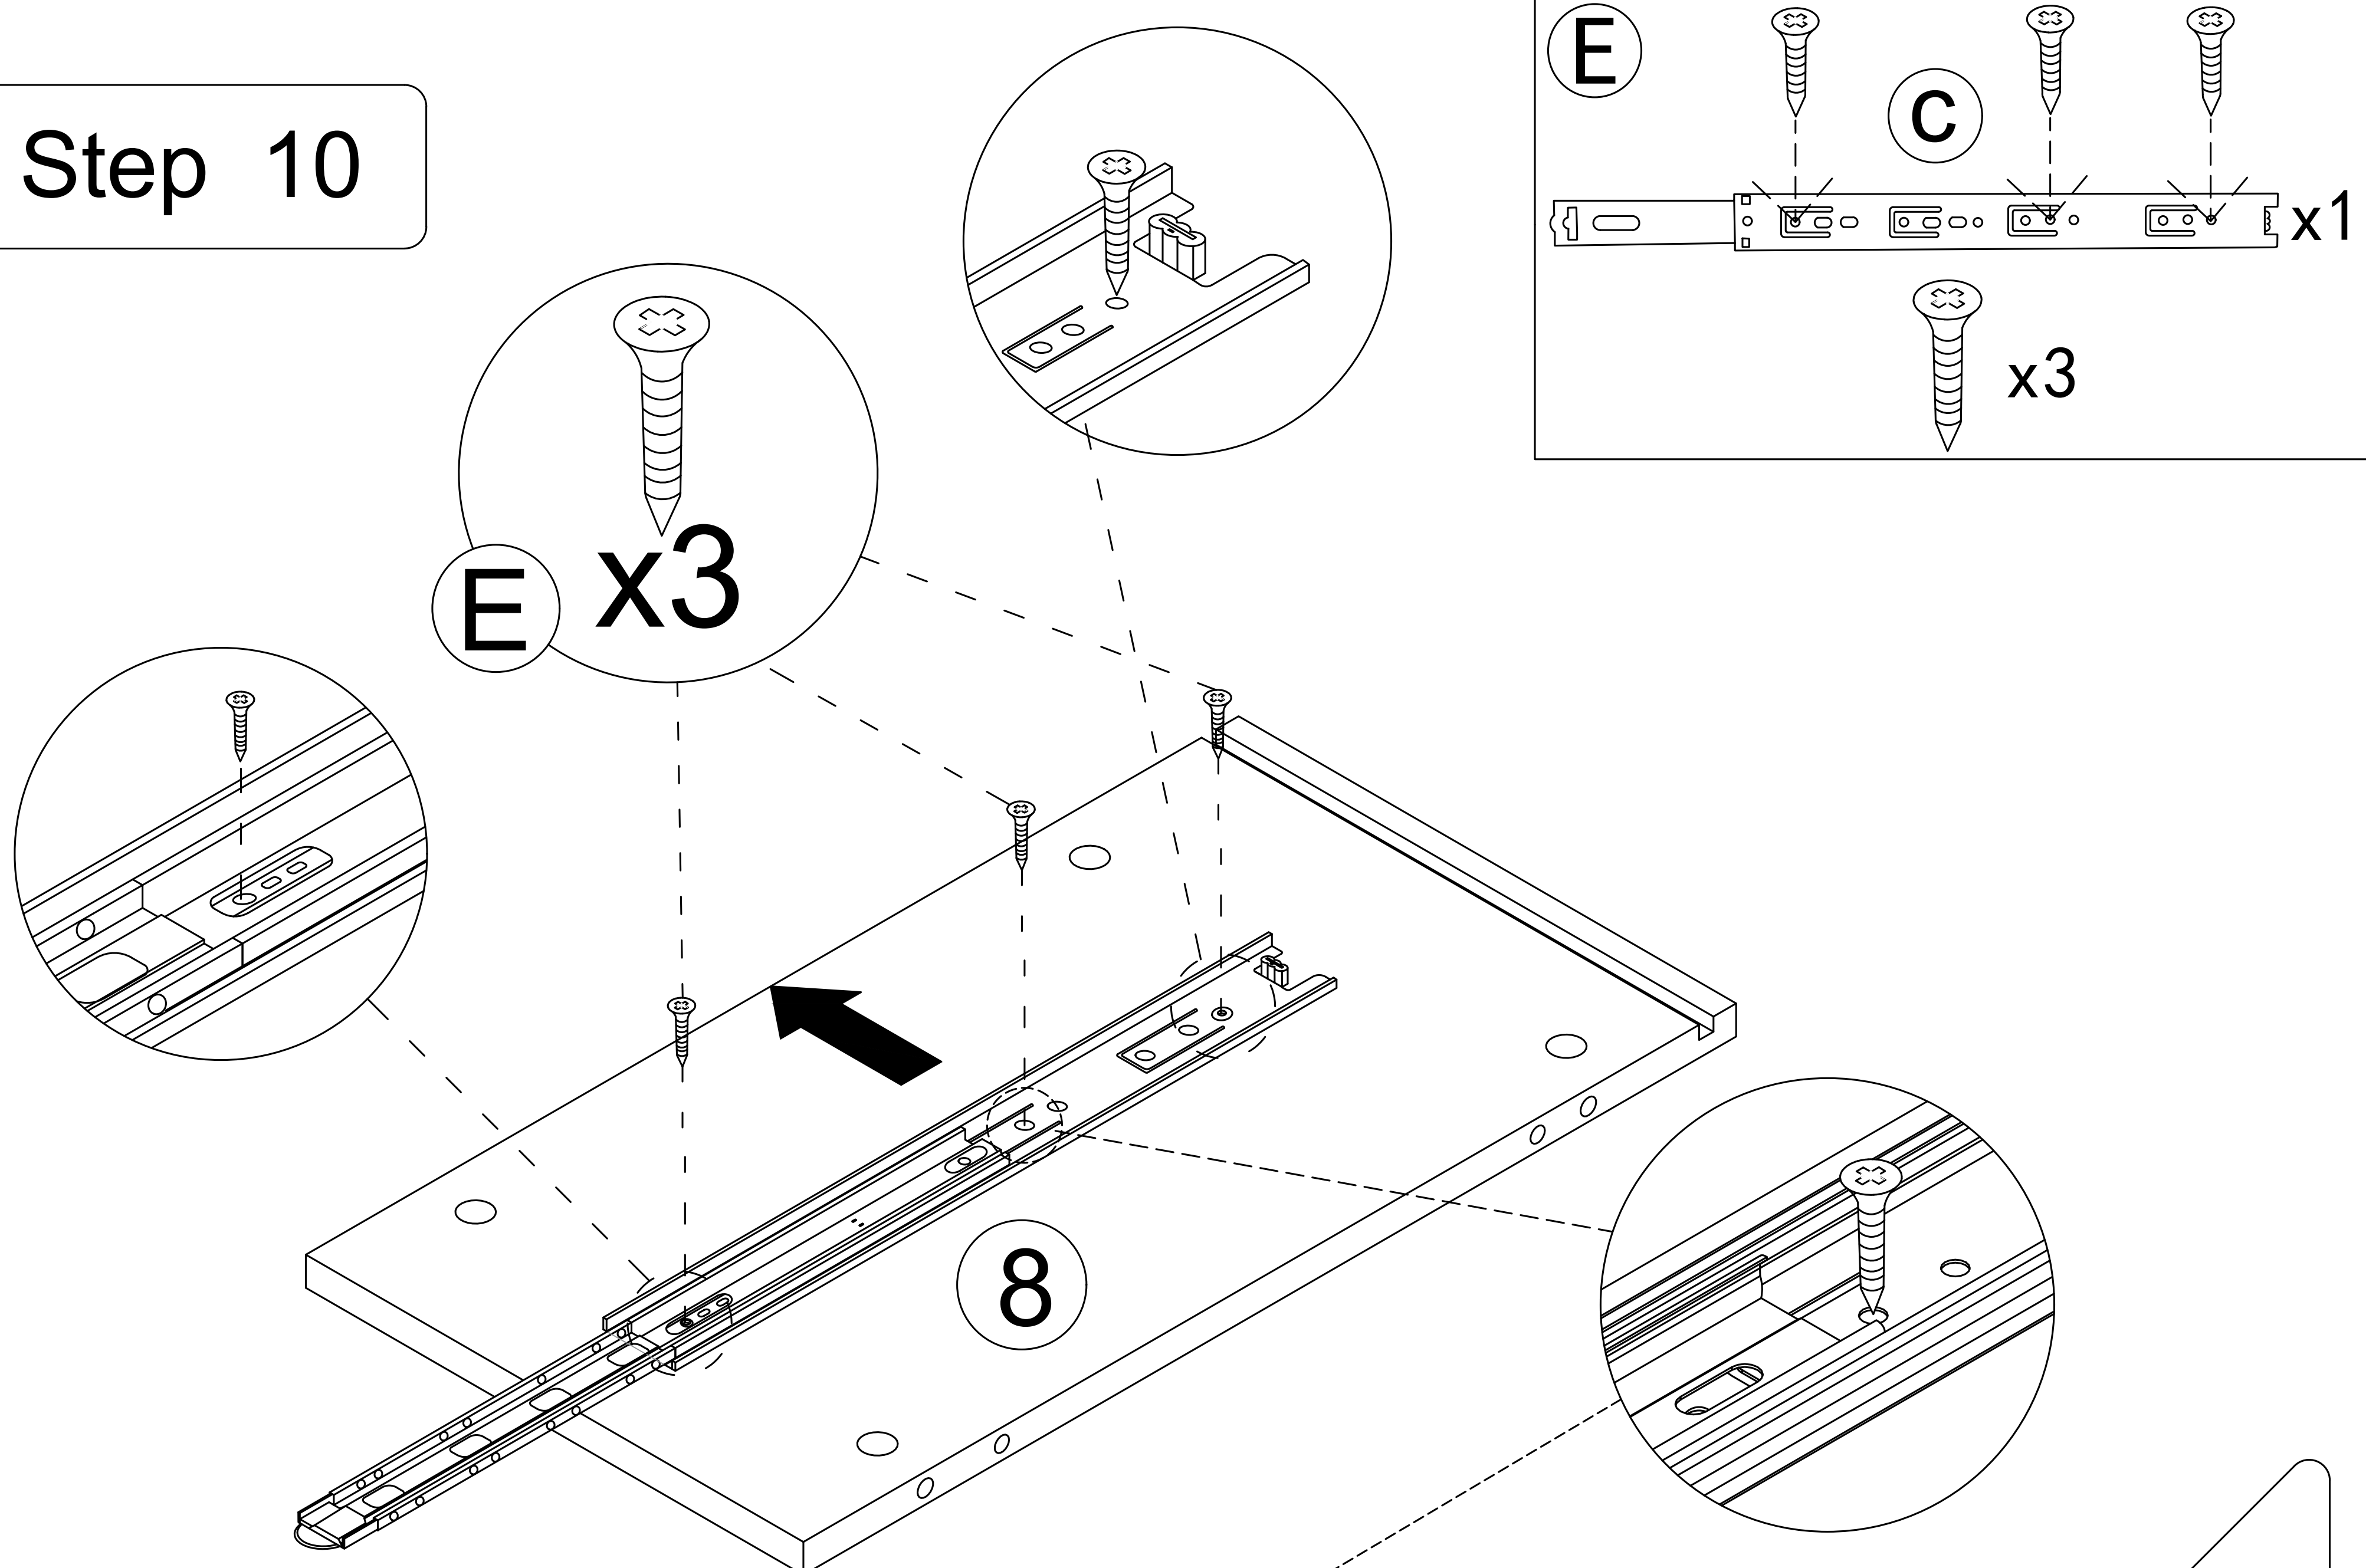


This hole is for strengthening fixed hole customers can choose to install according to their needs.



Step 11

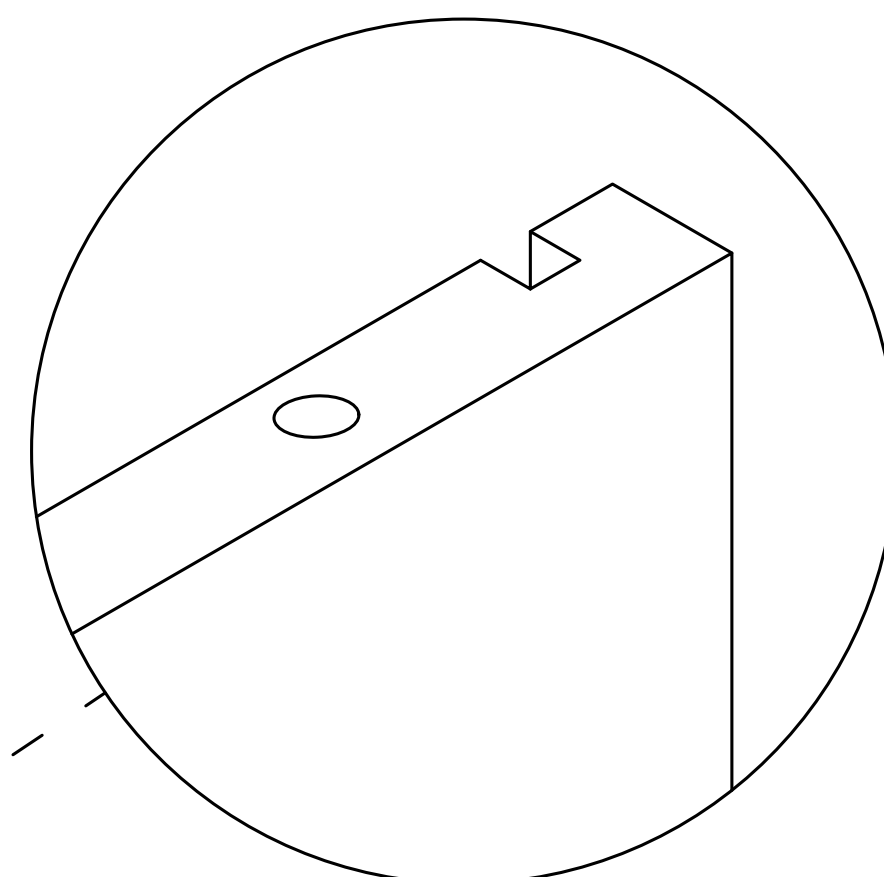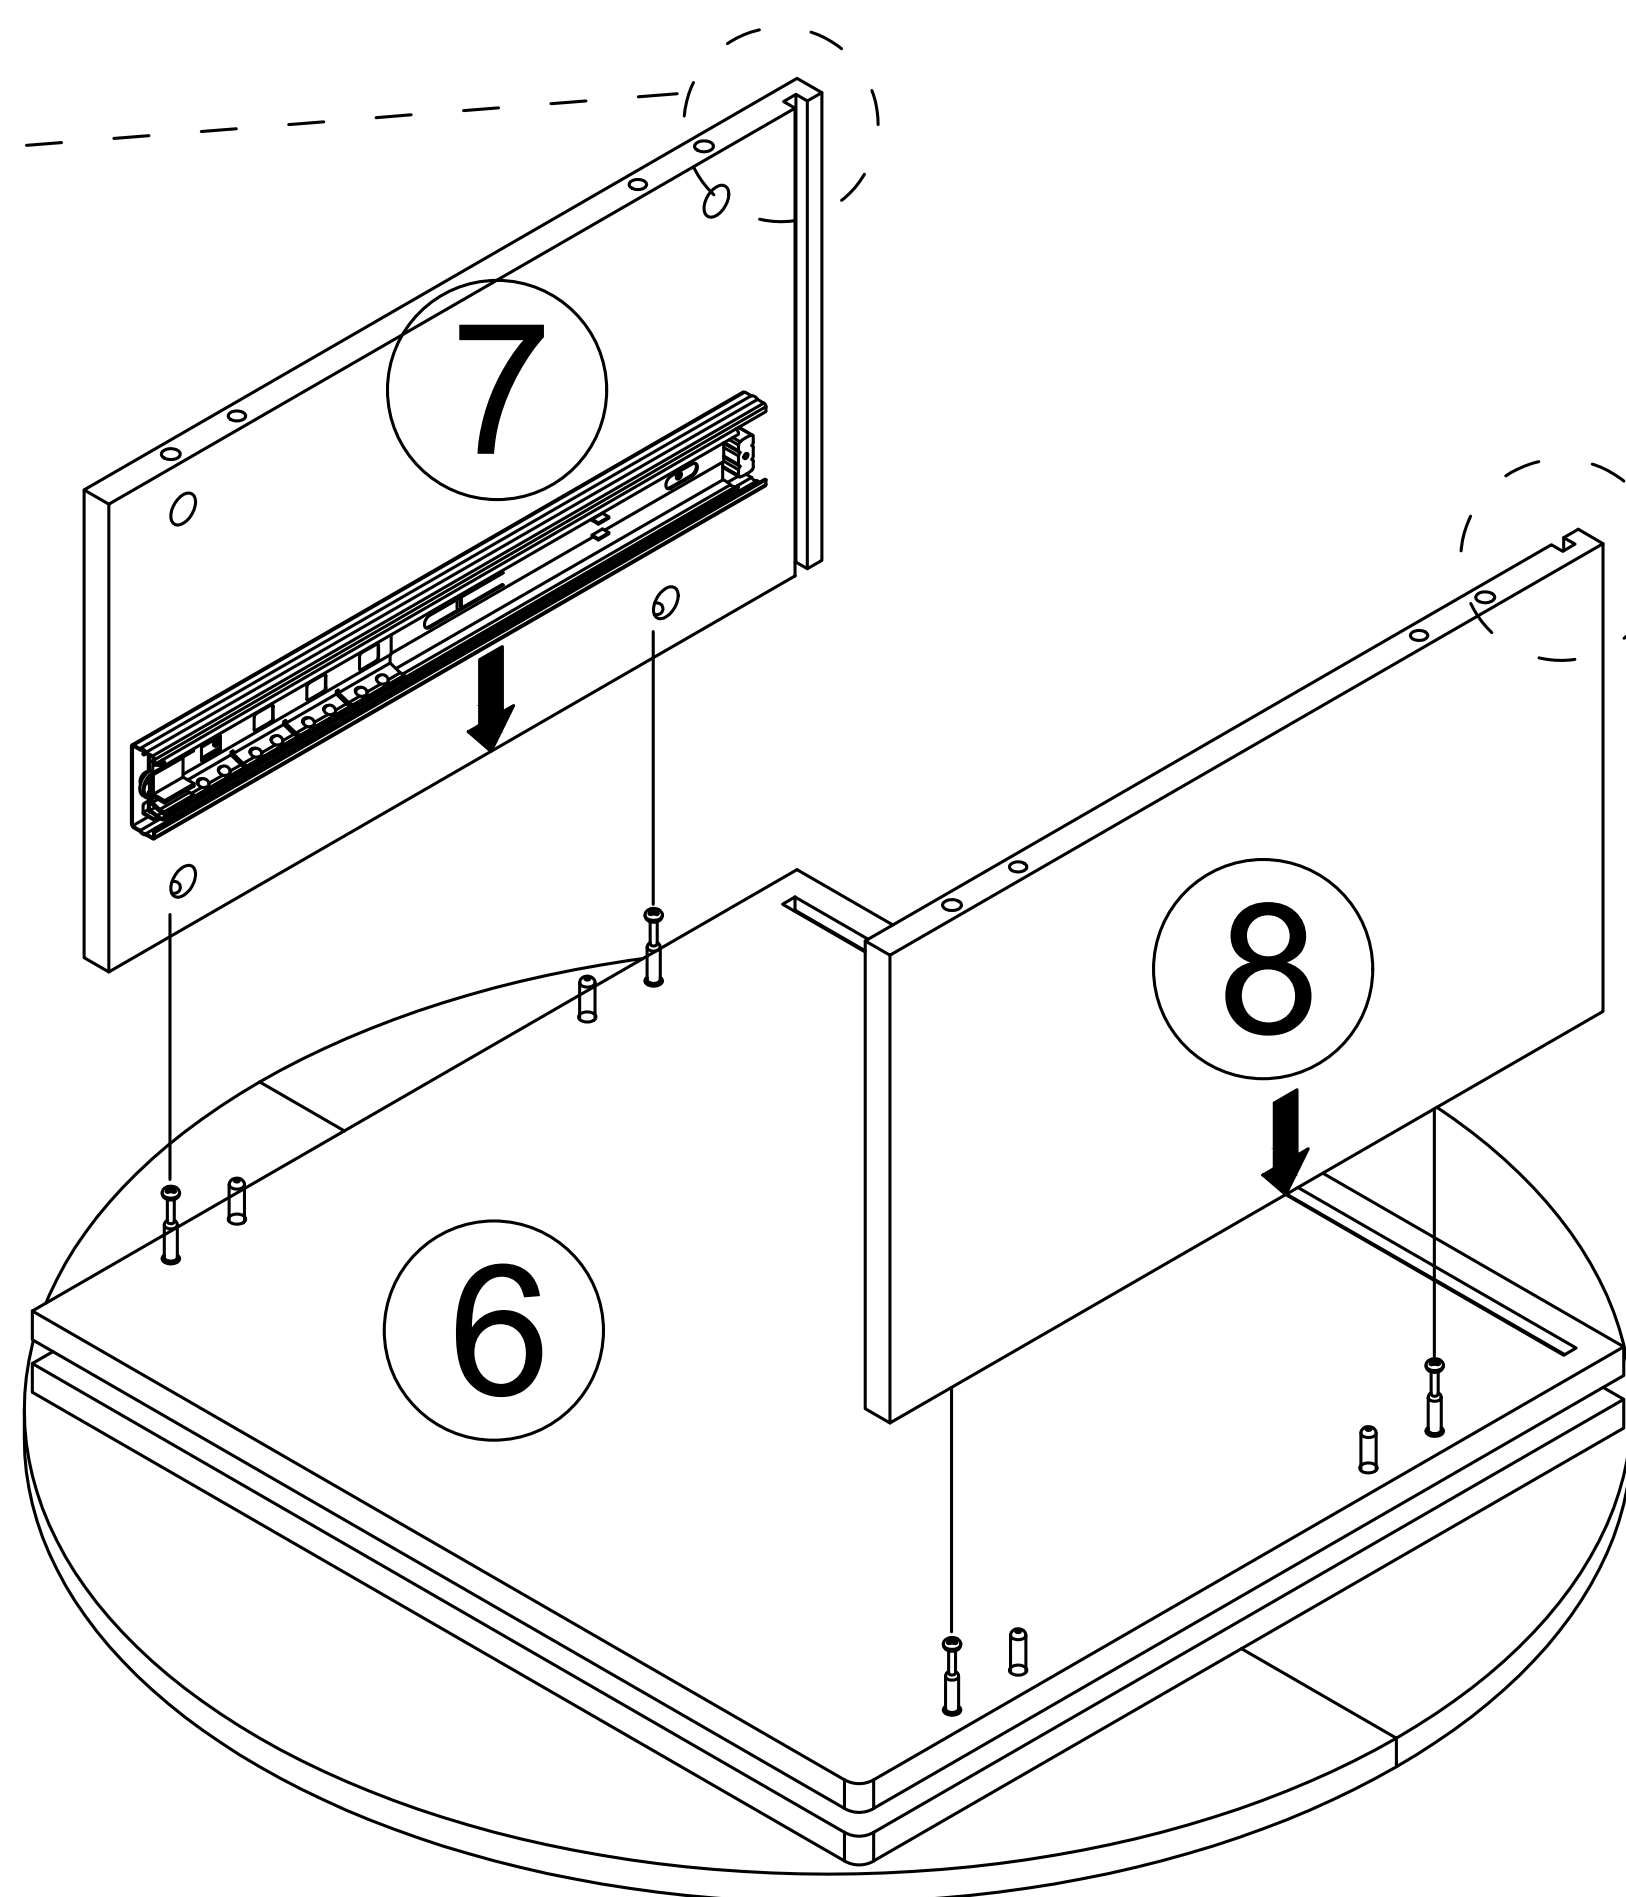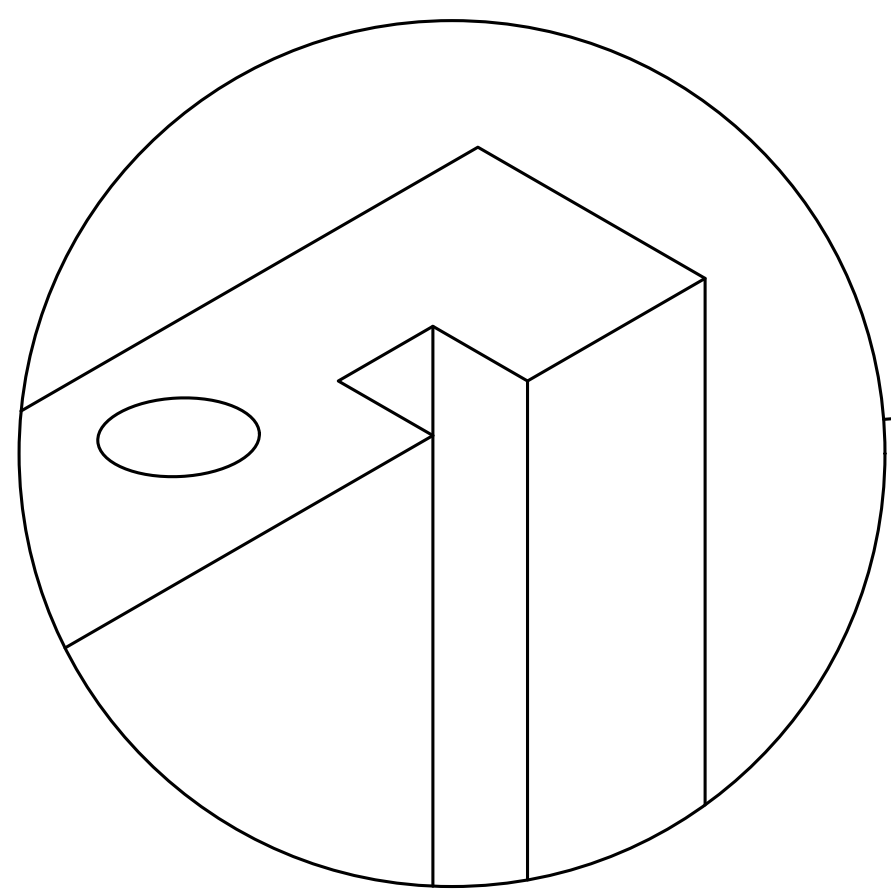




Step 12

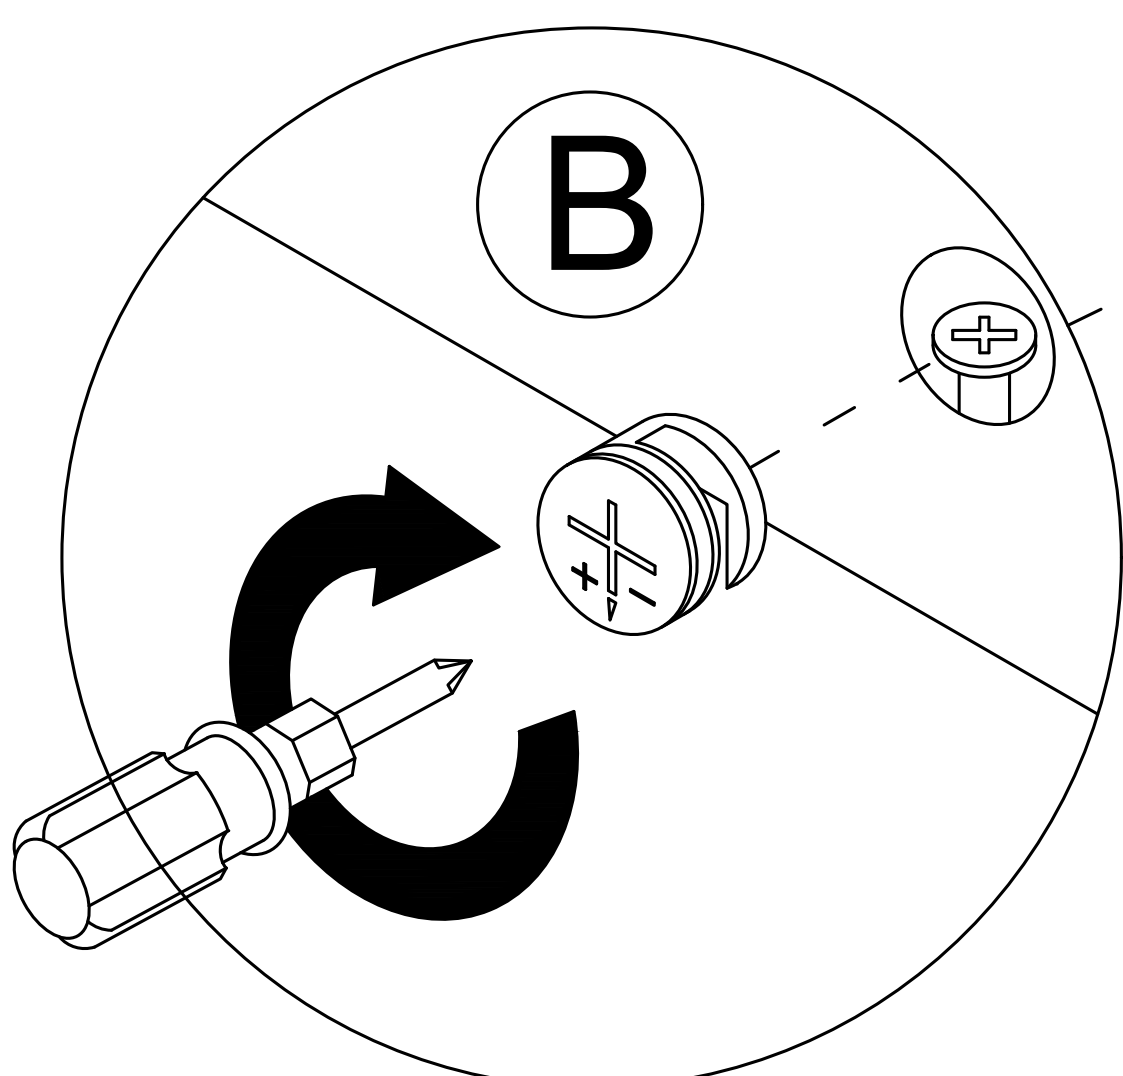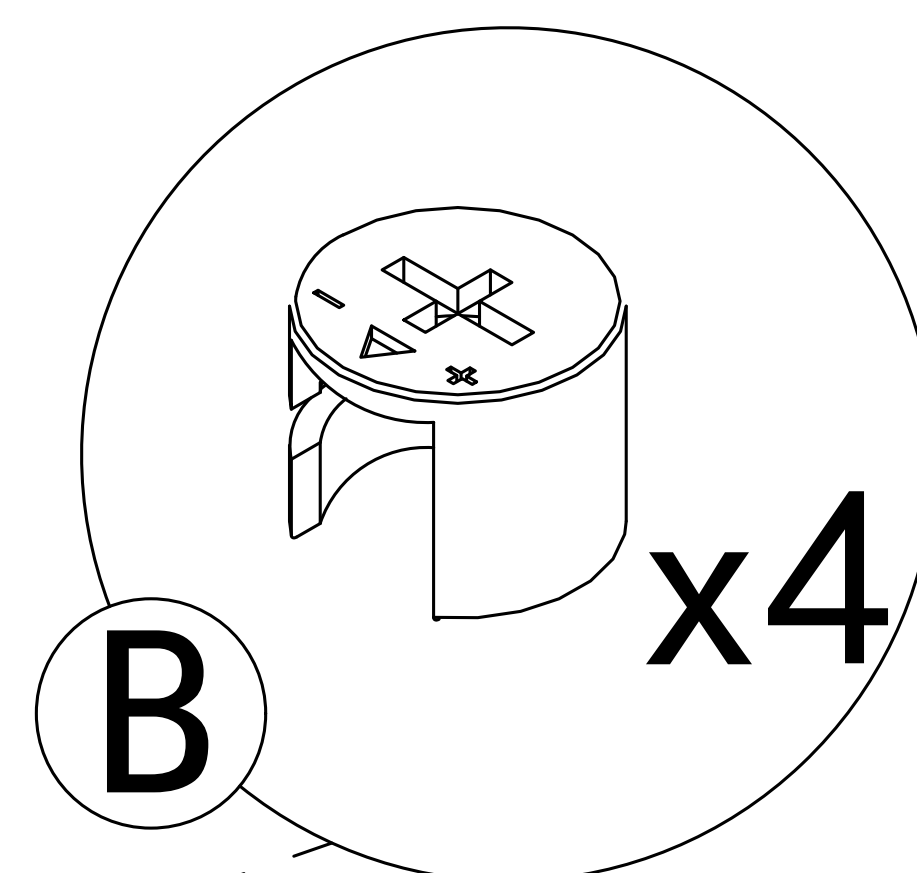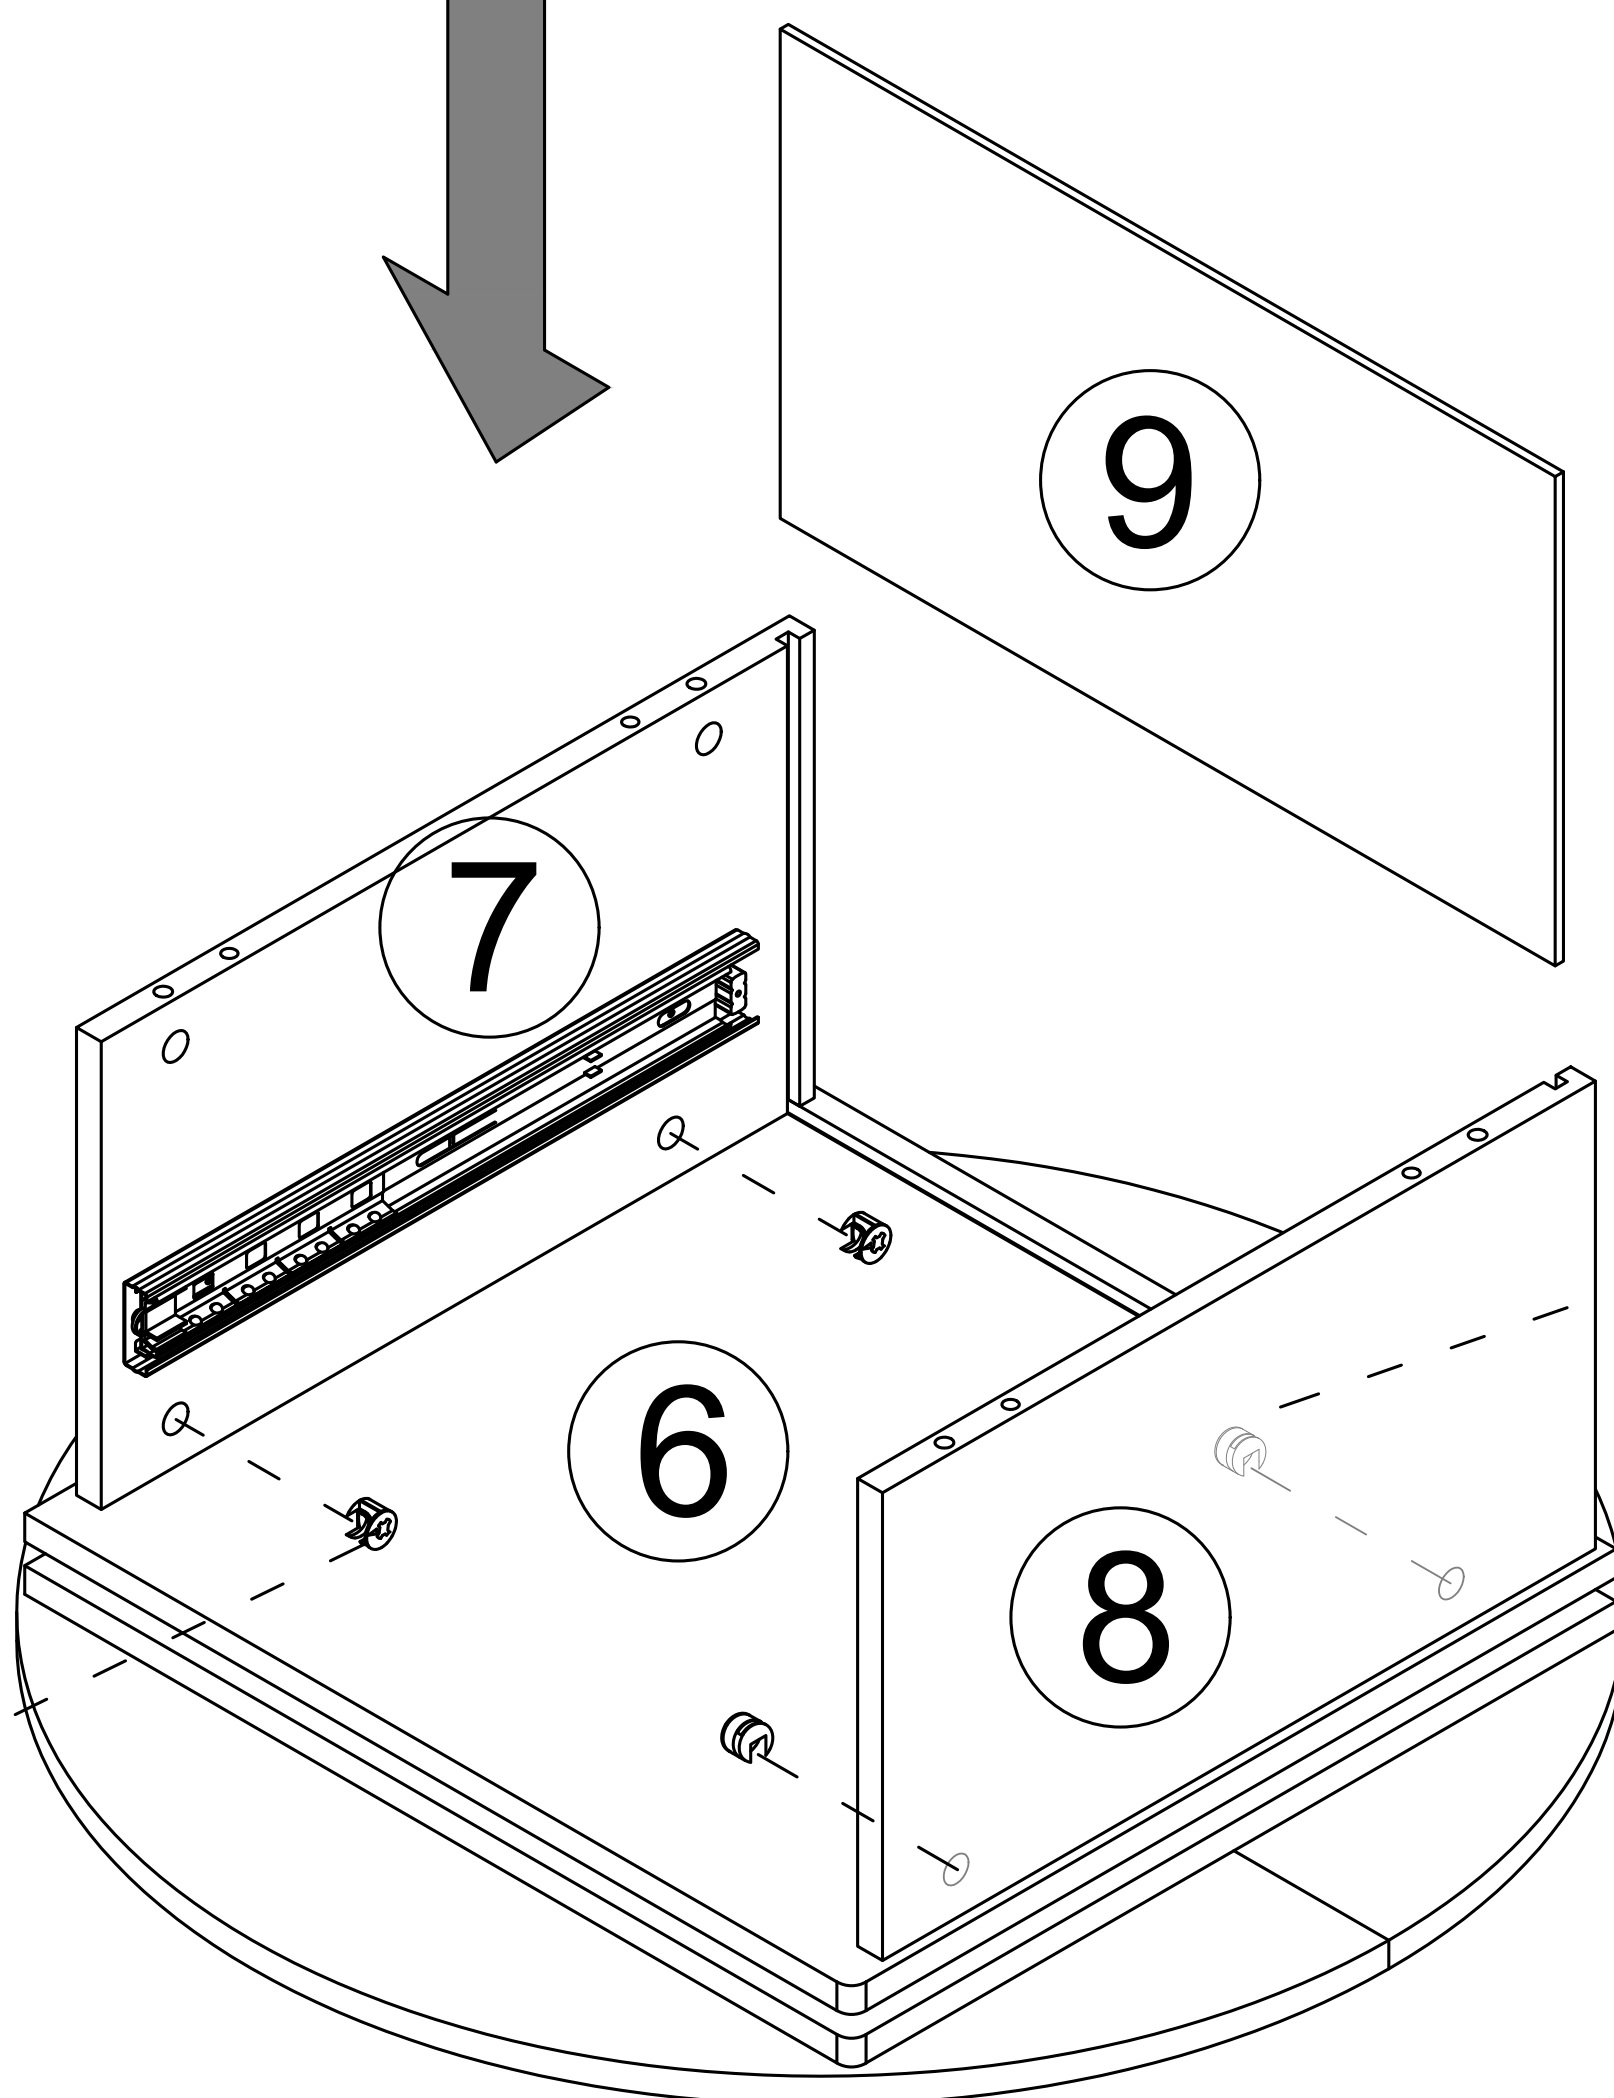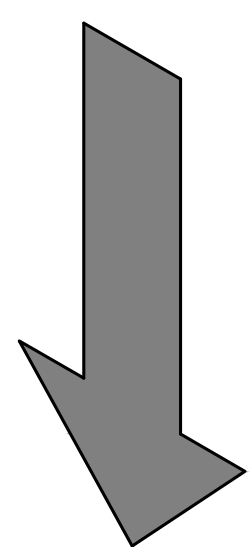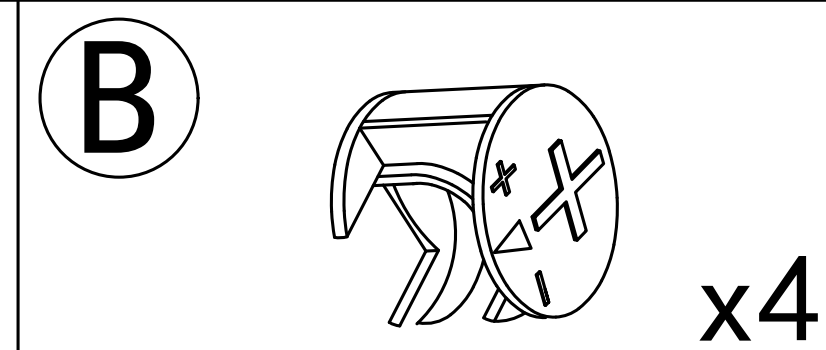

Step 13

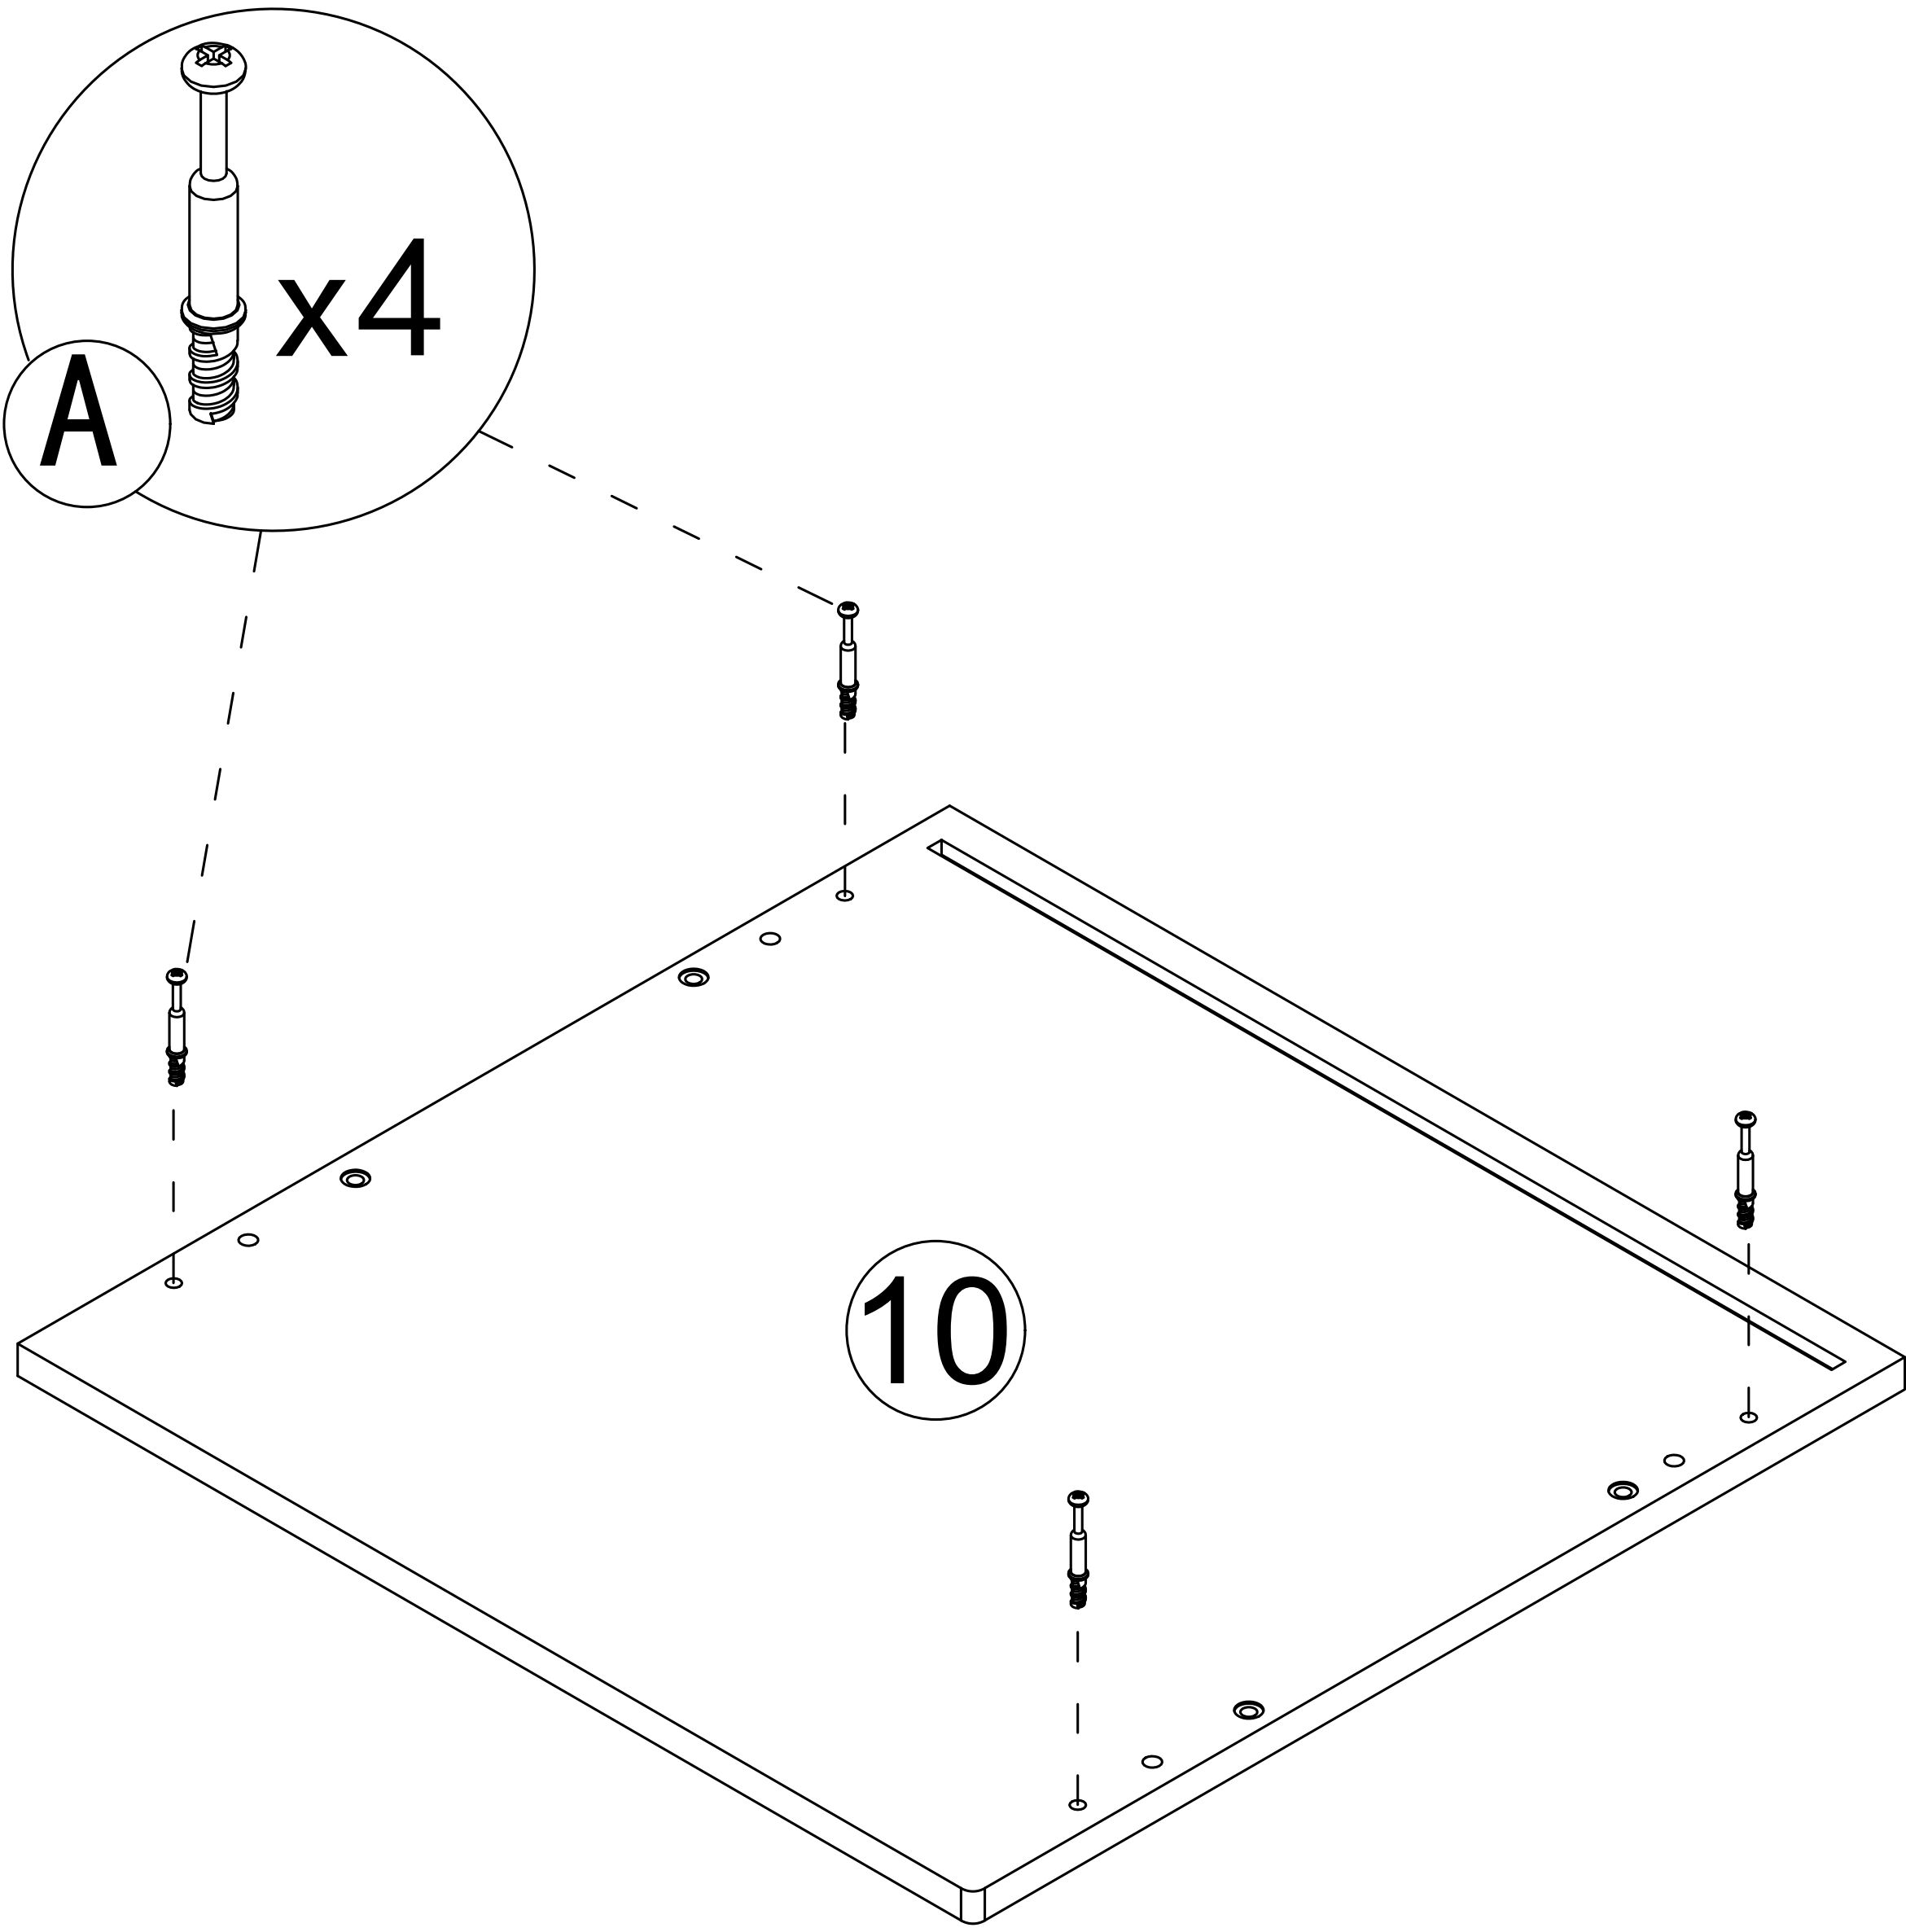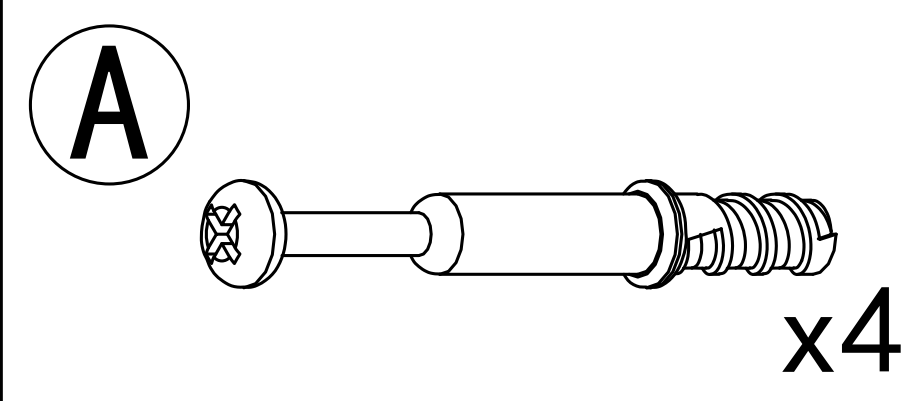


Step 14

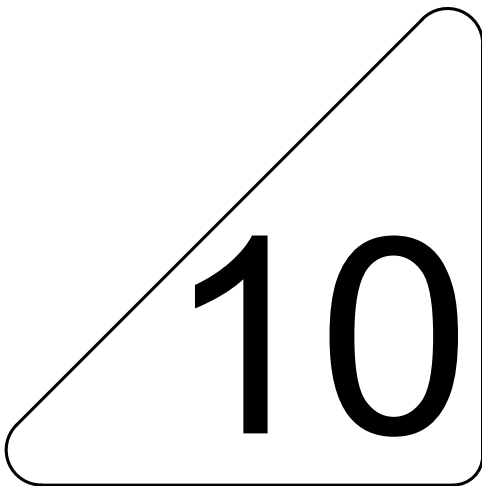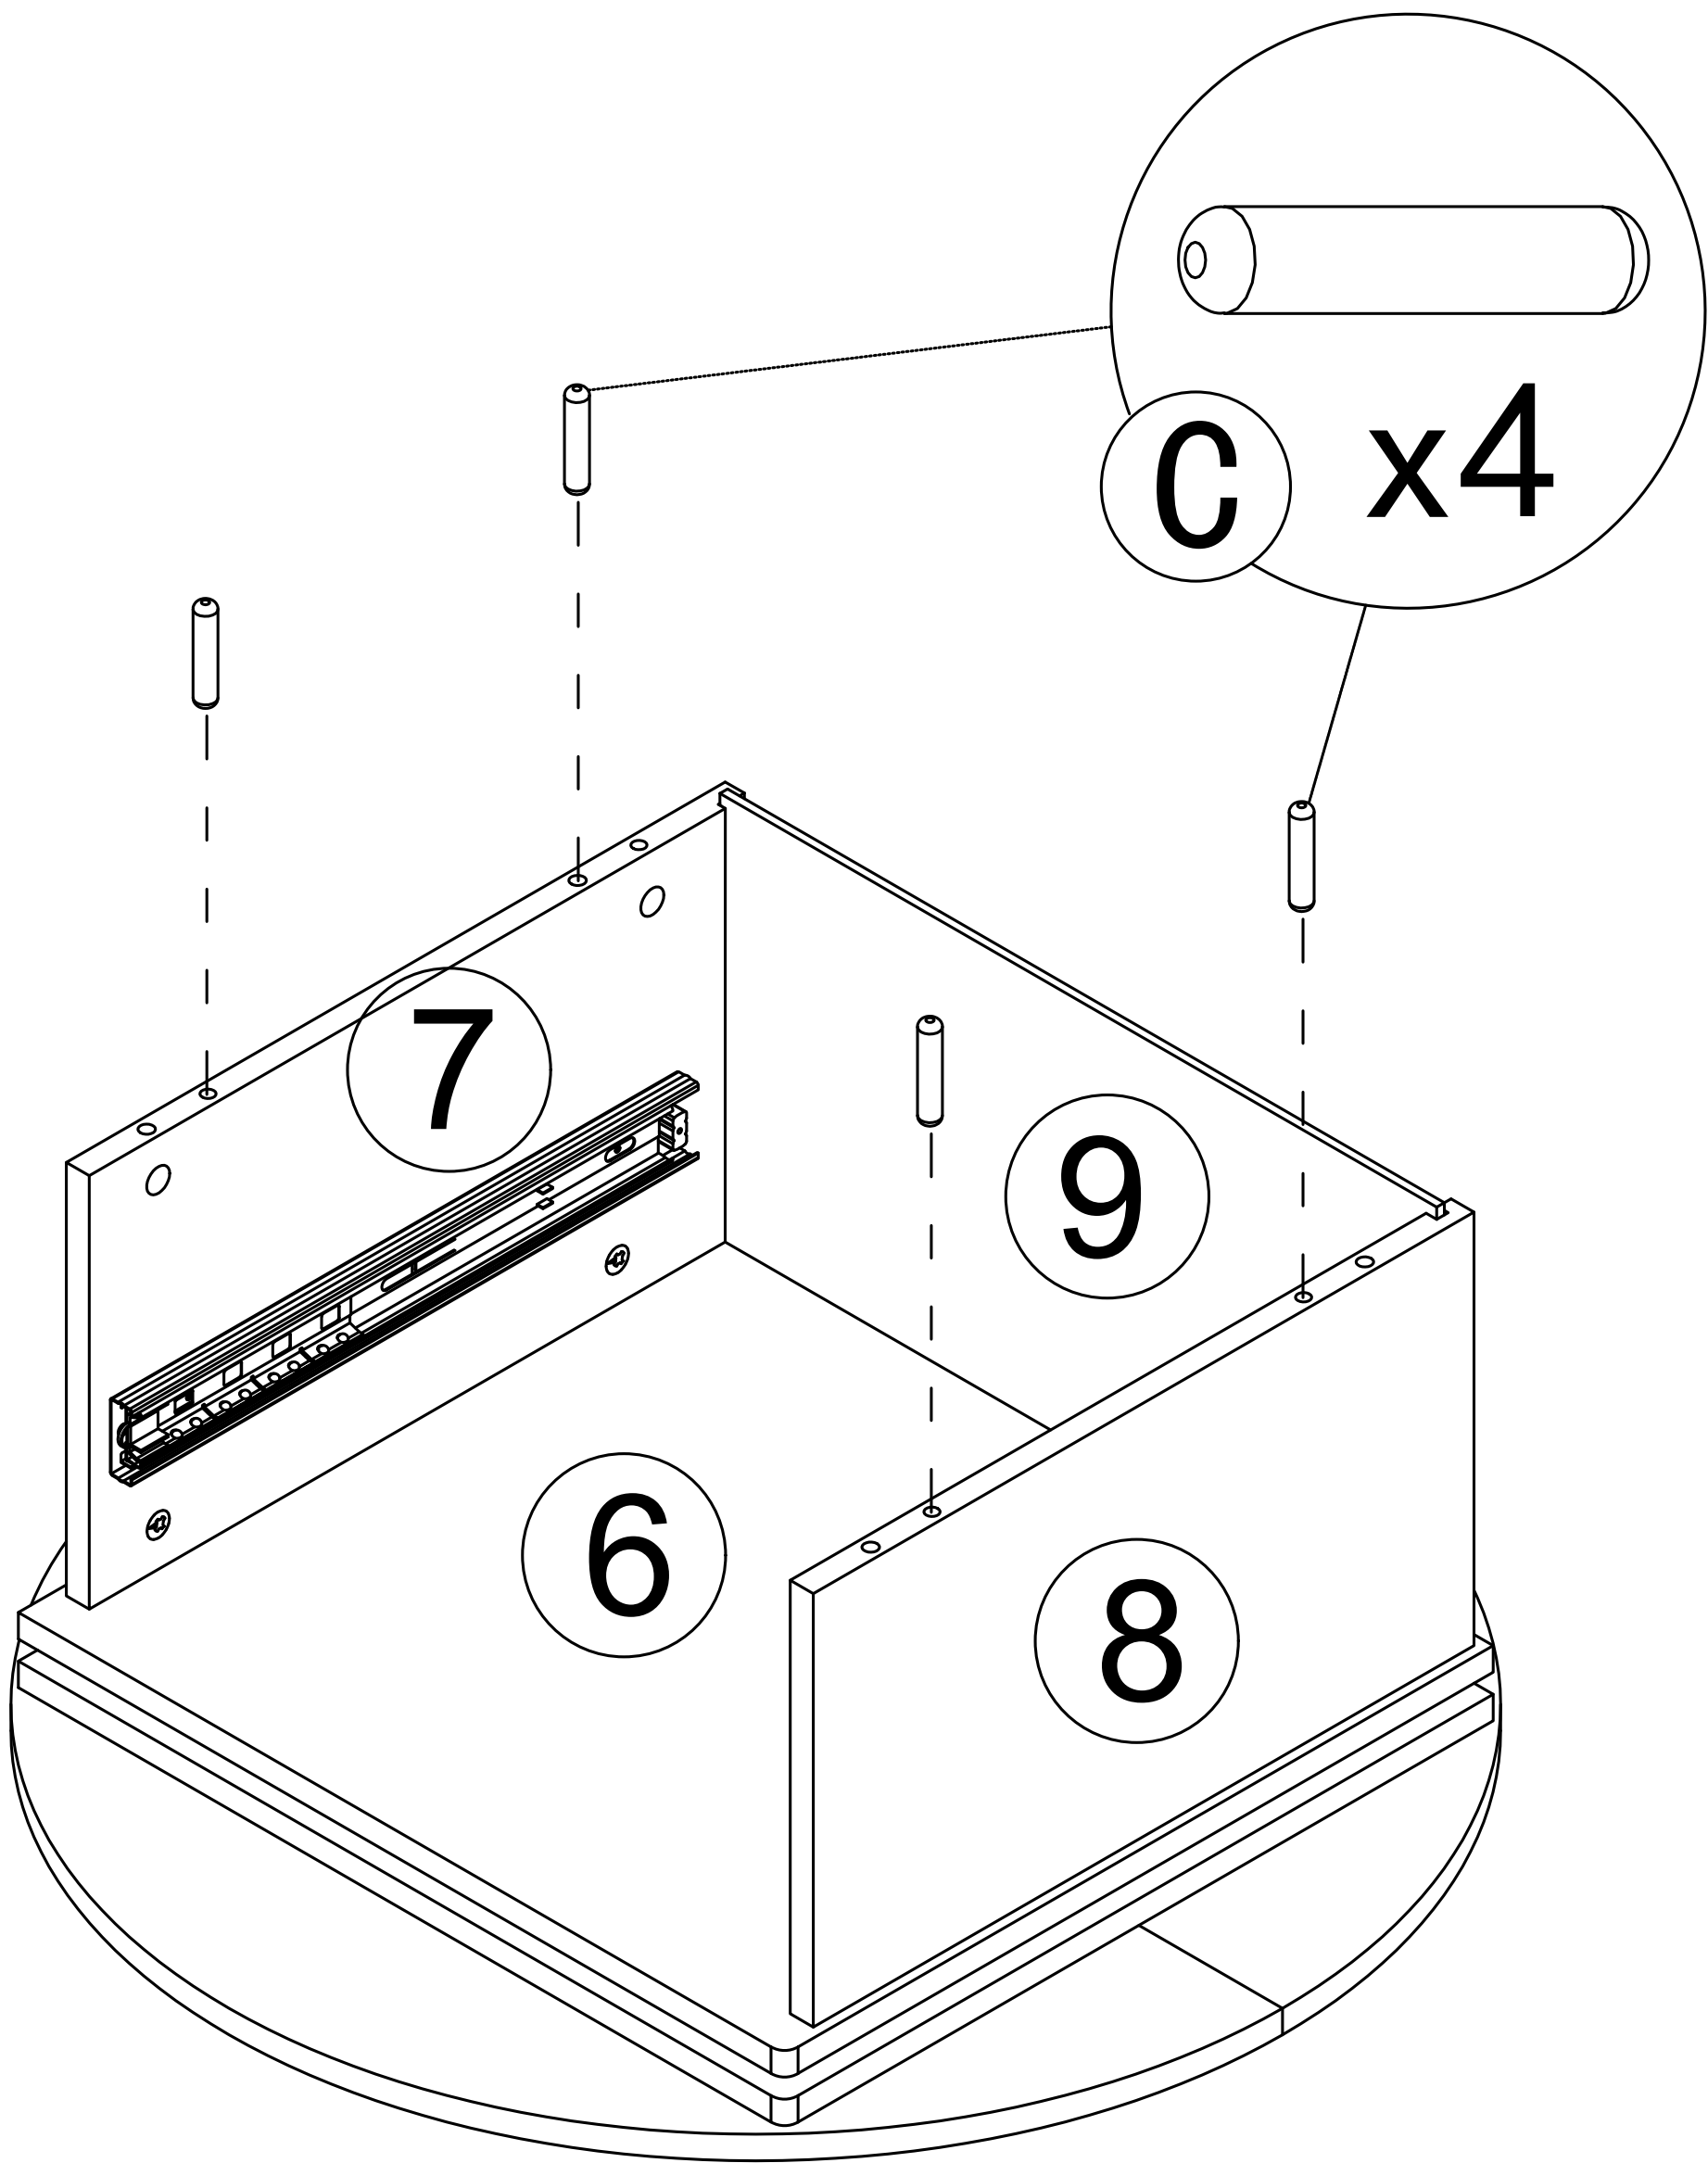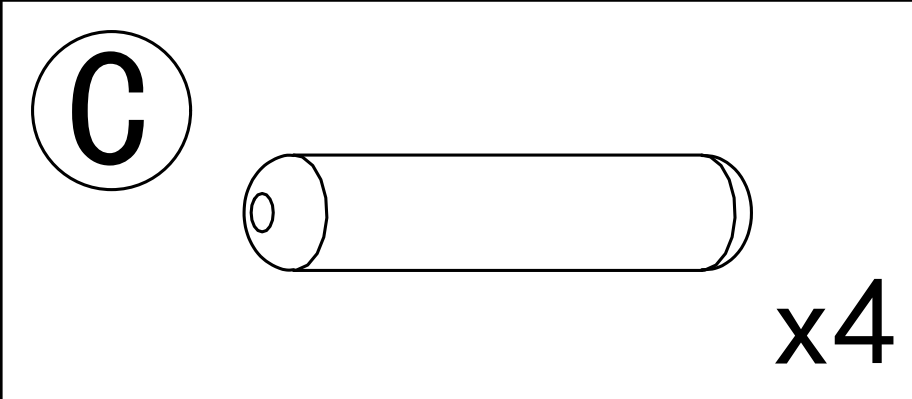


Step 15



B



x4

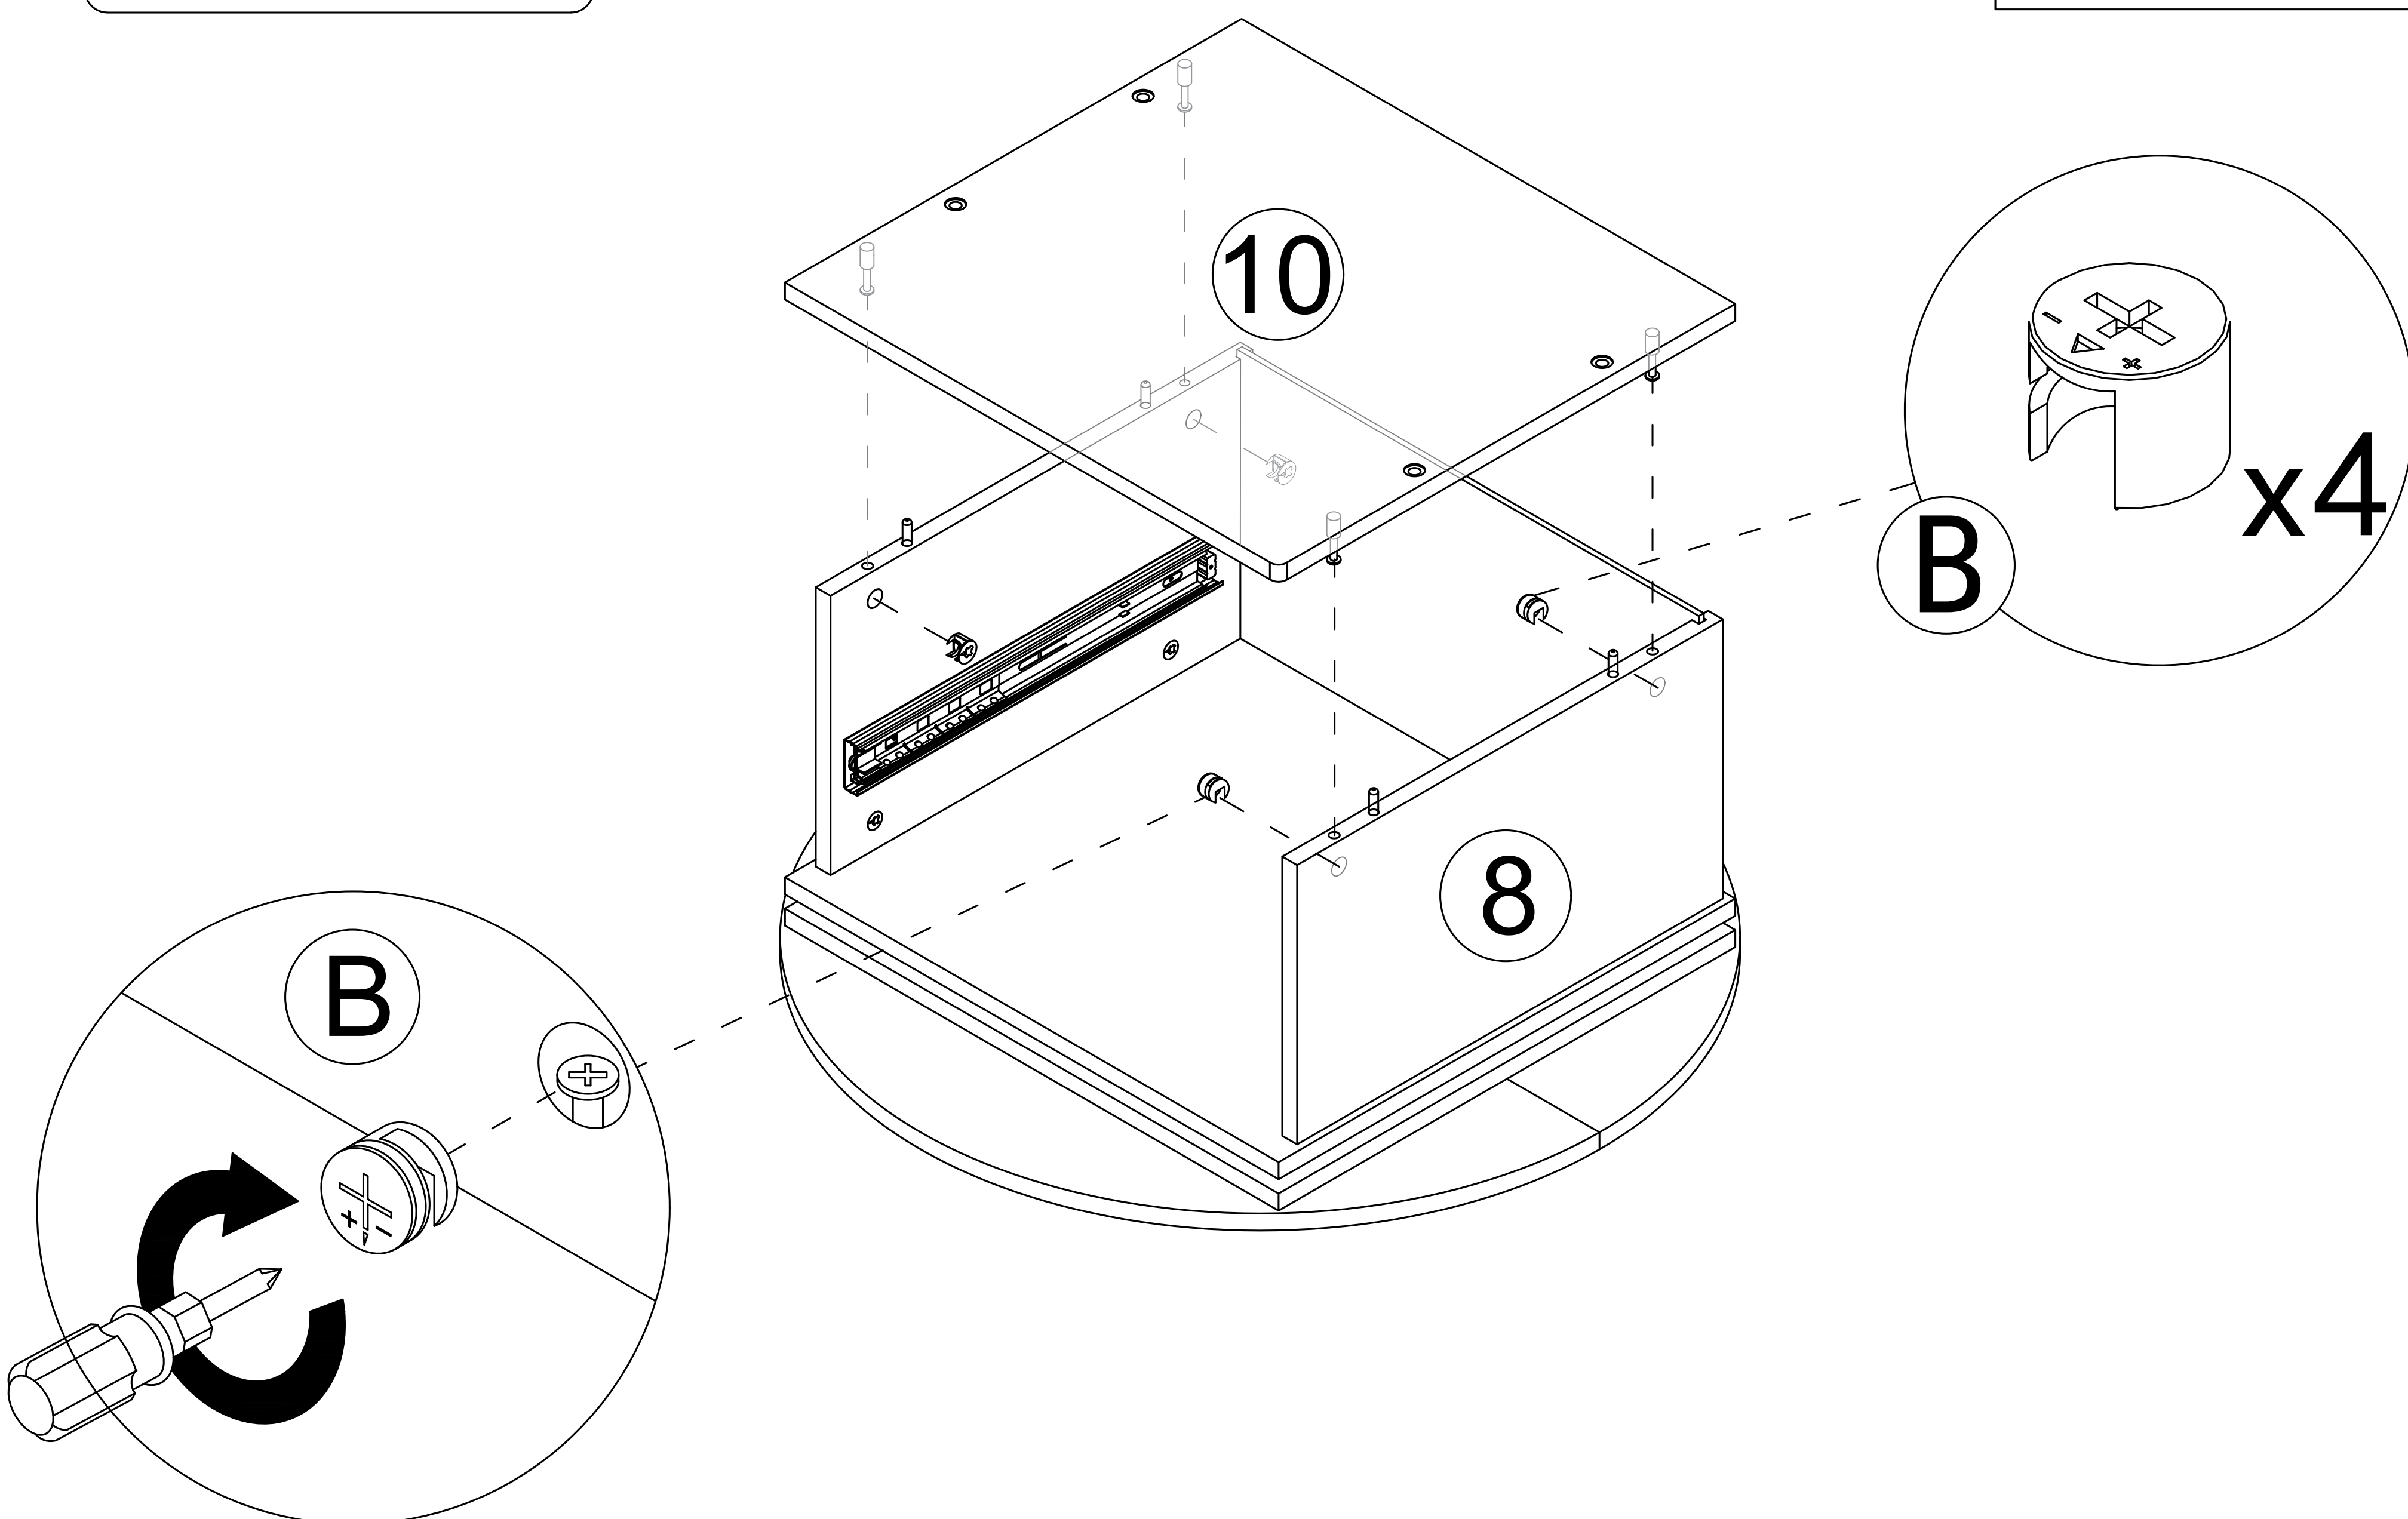


Step 16

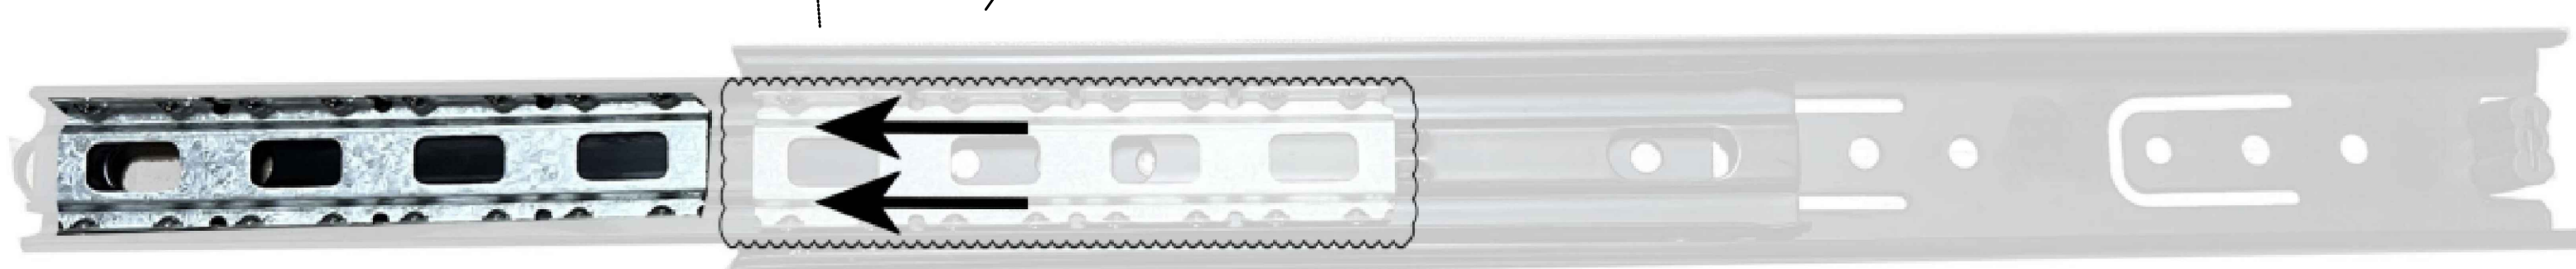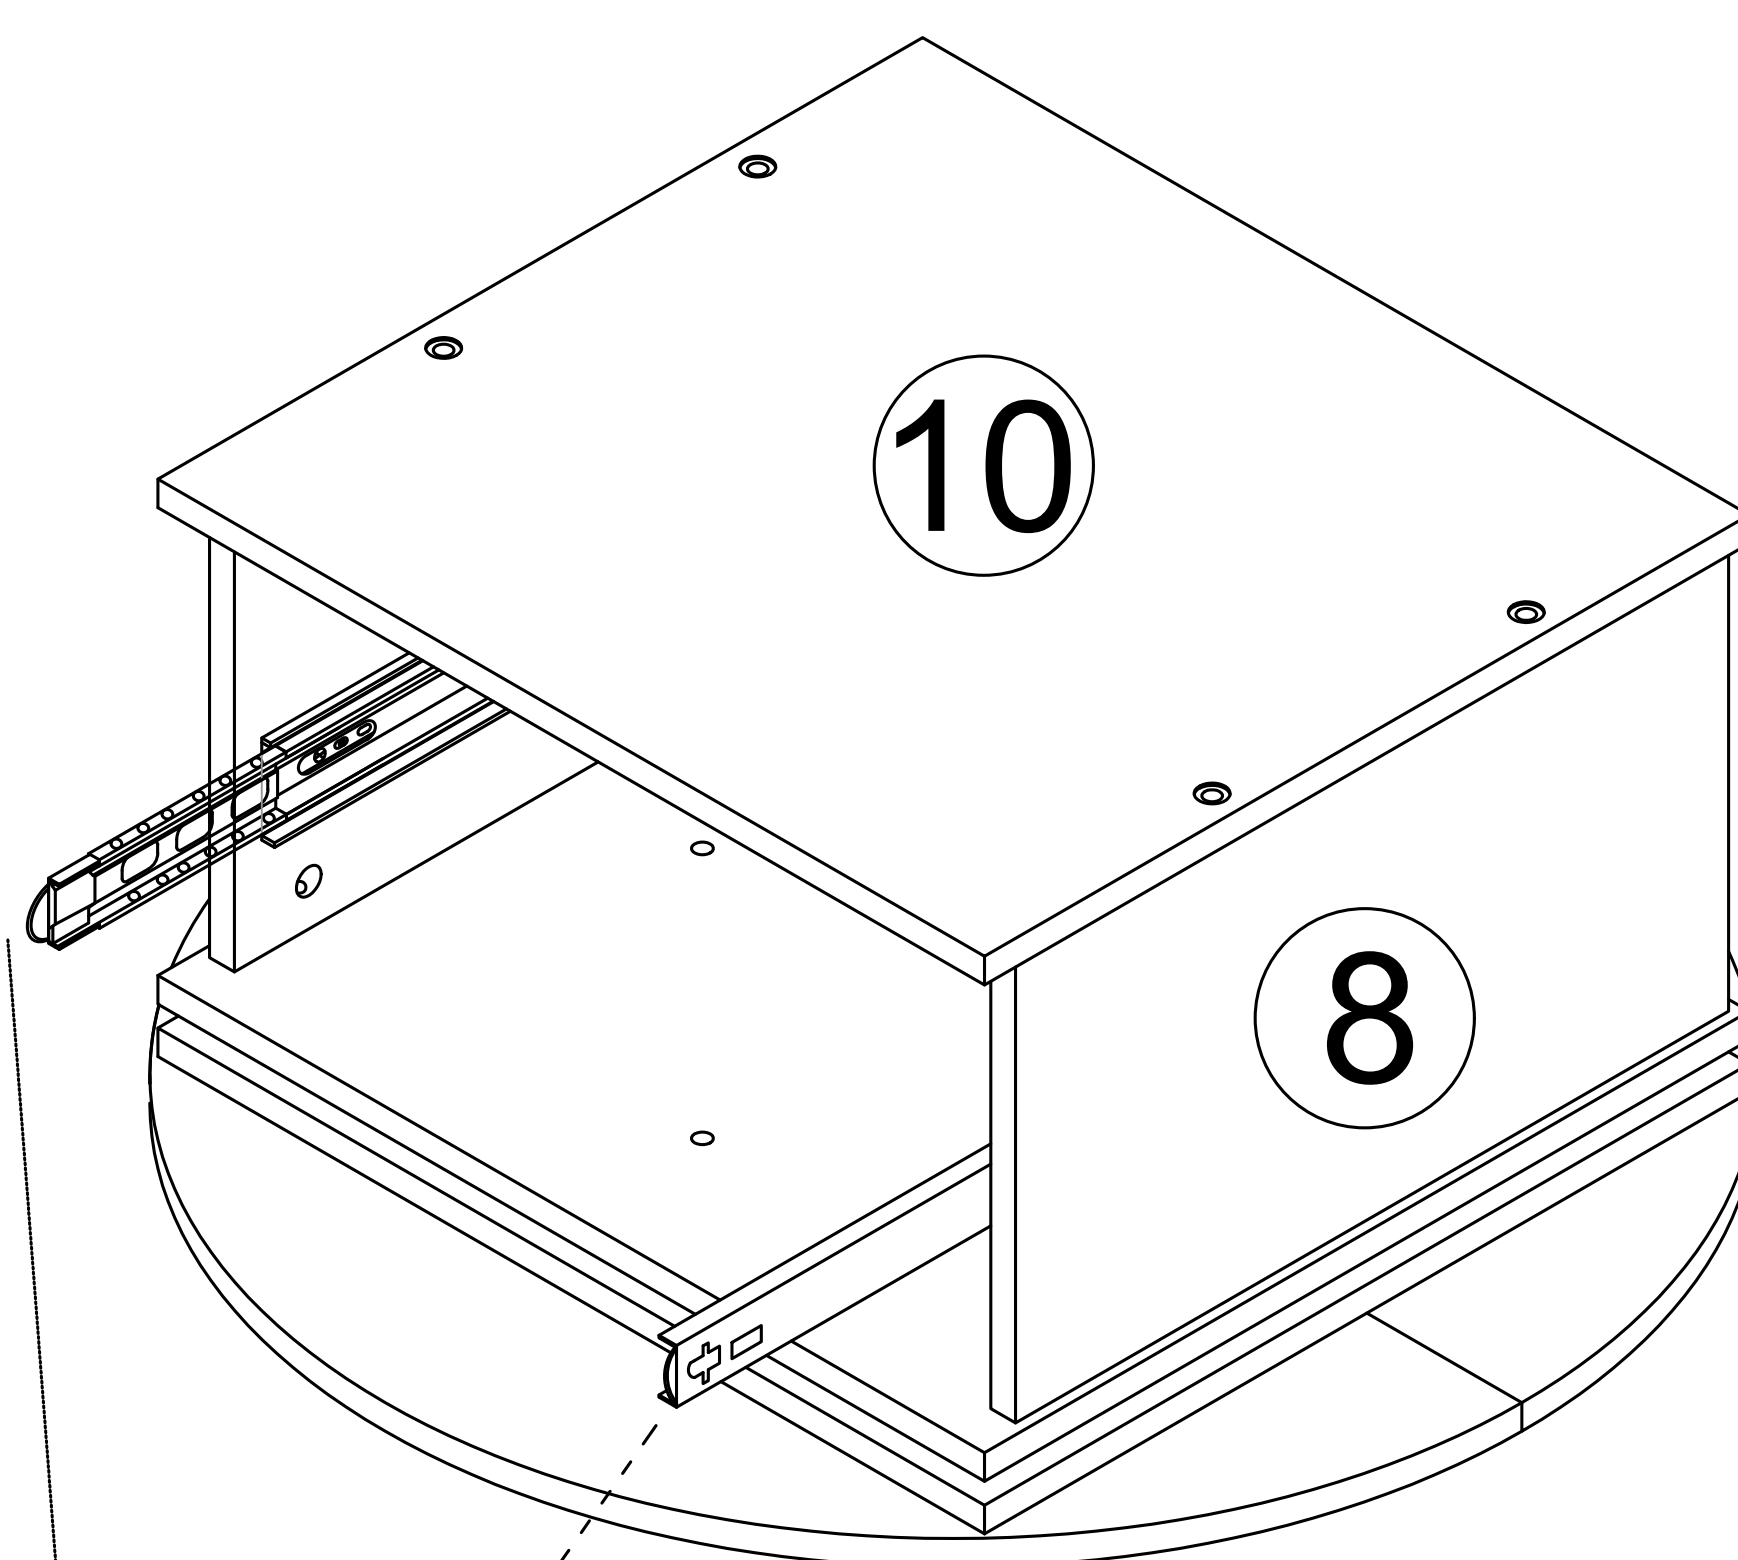


As shown, When installing the drawer,
pull the guide rail out first, Slide beads are also pulled out.

Step 17

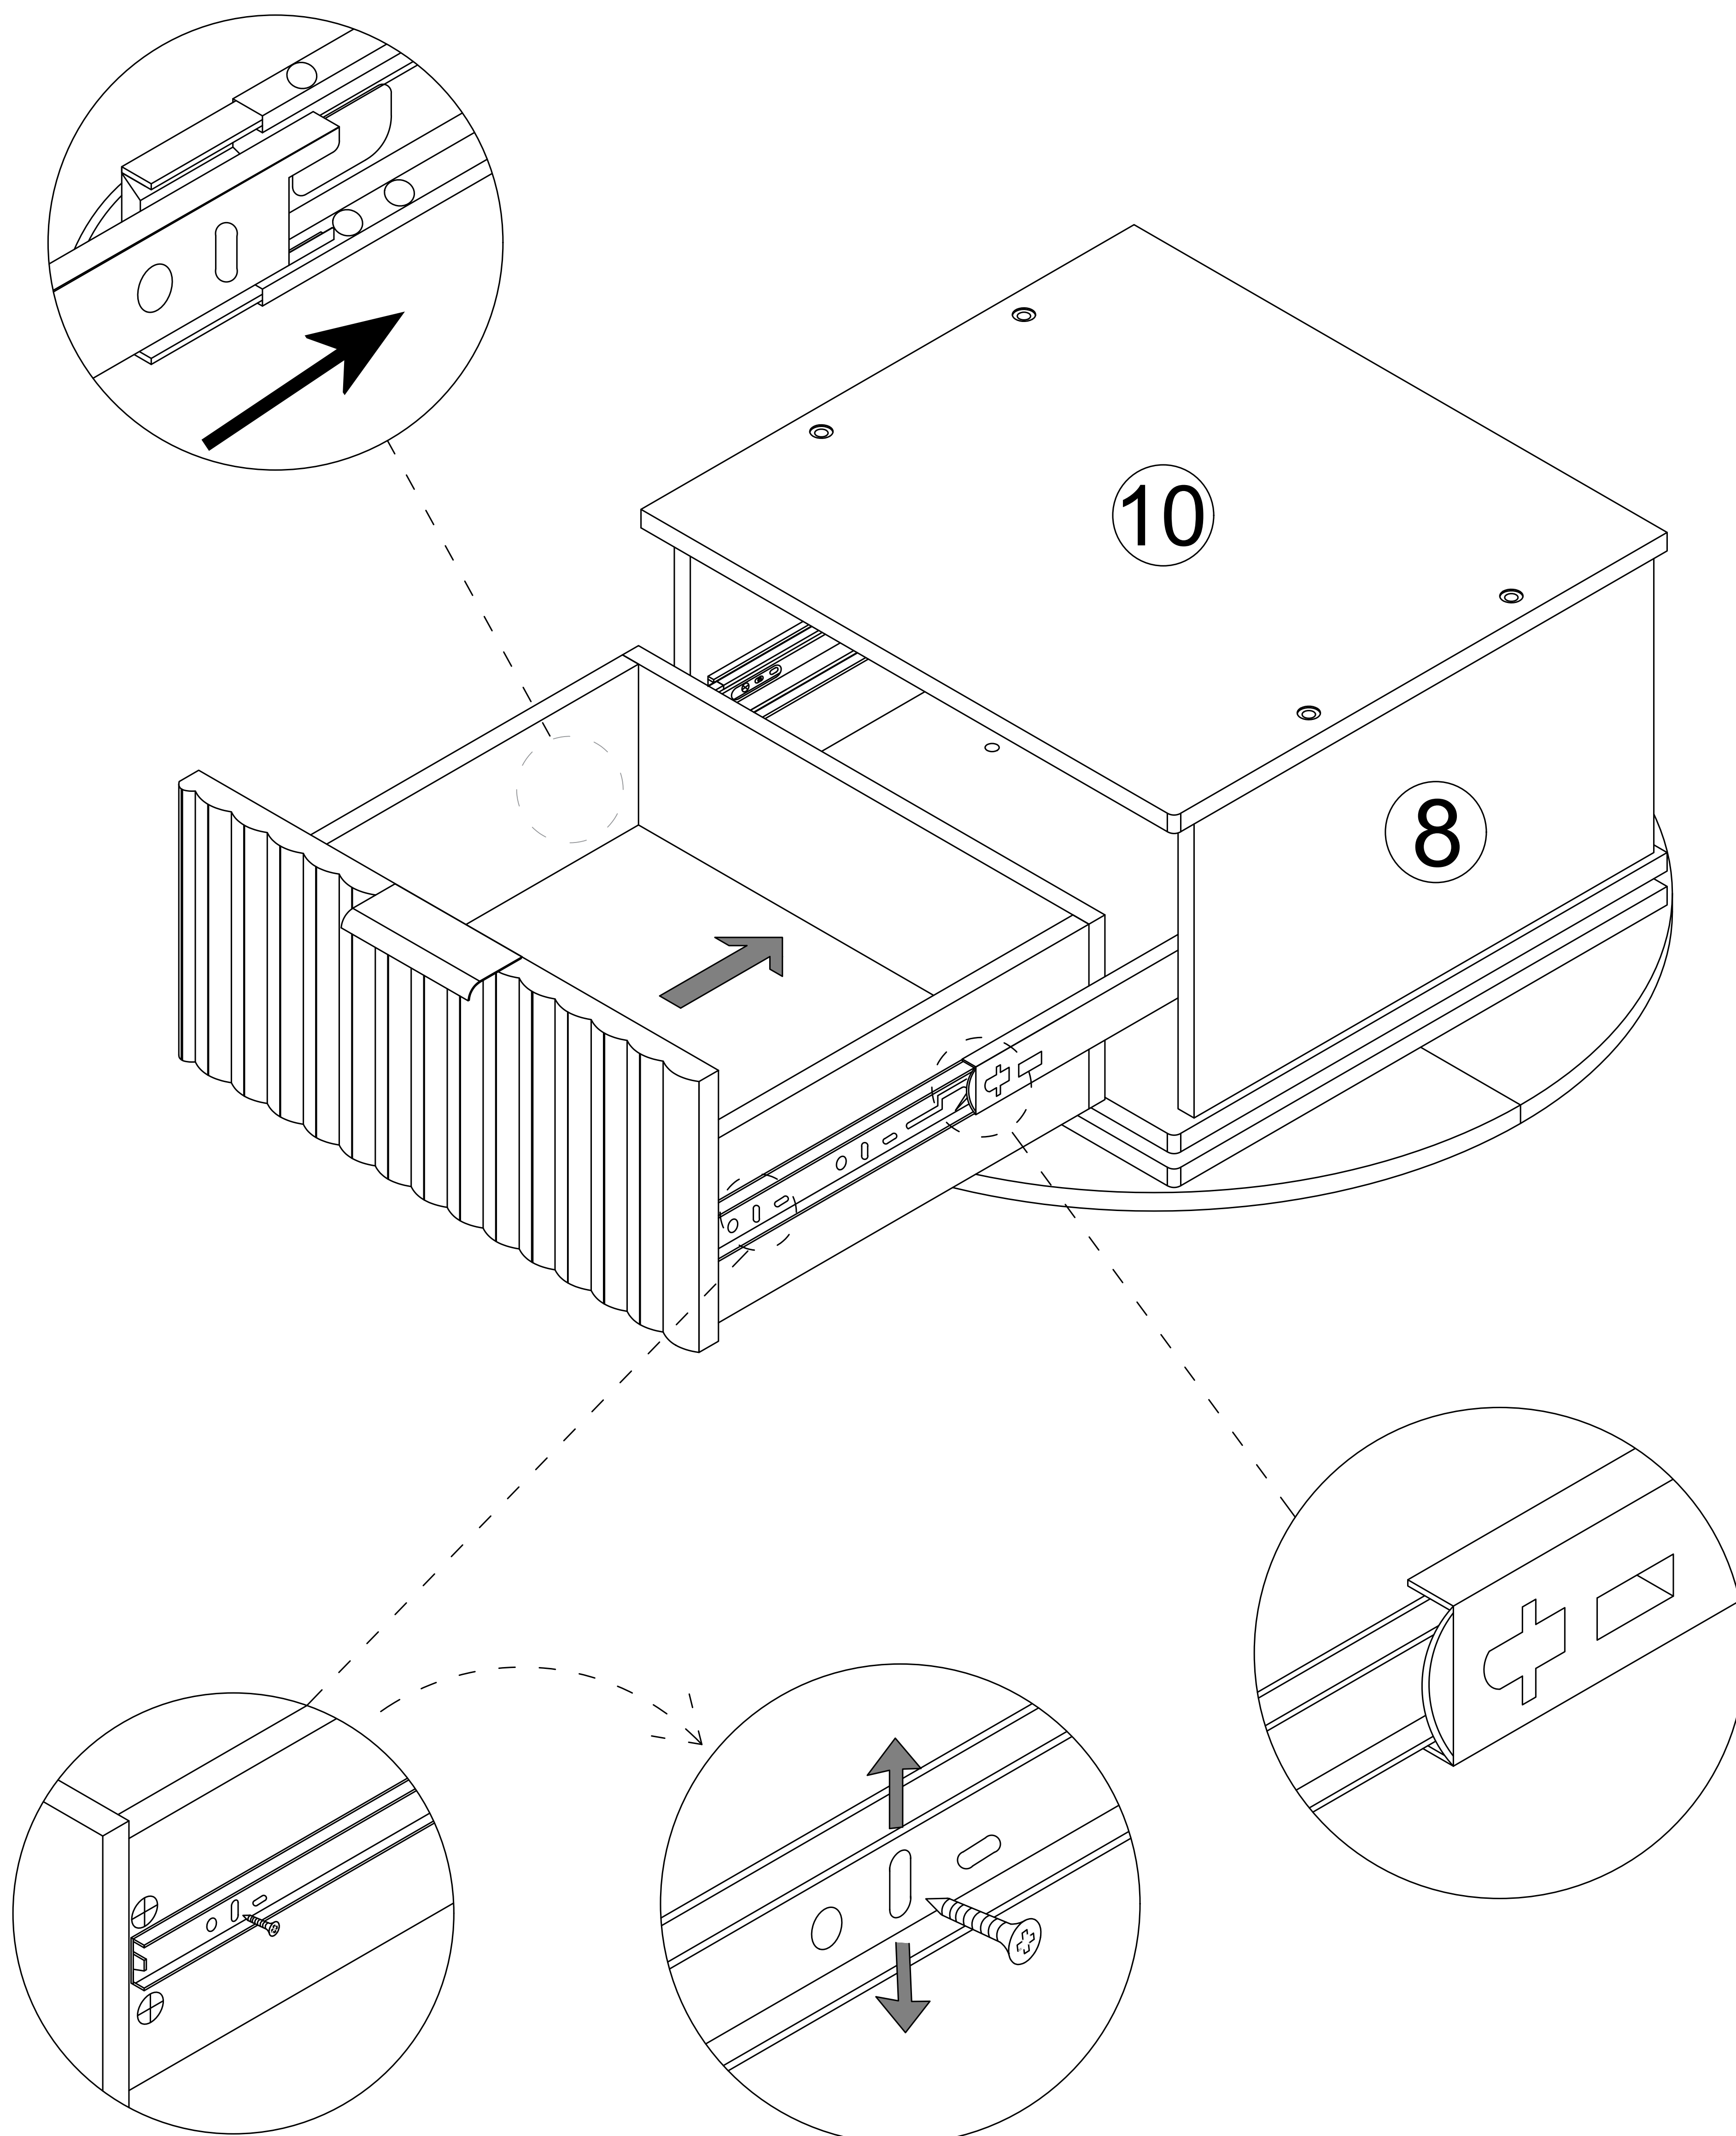


If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap

Step 18

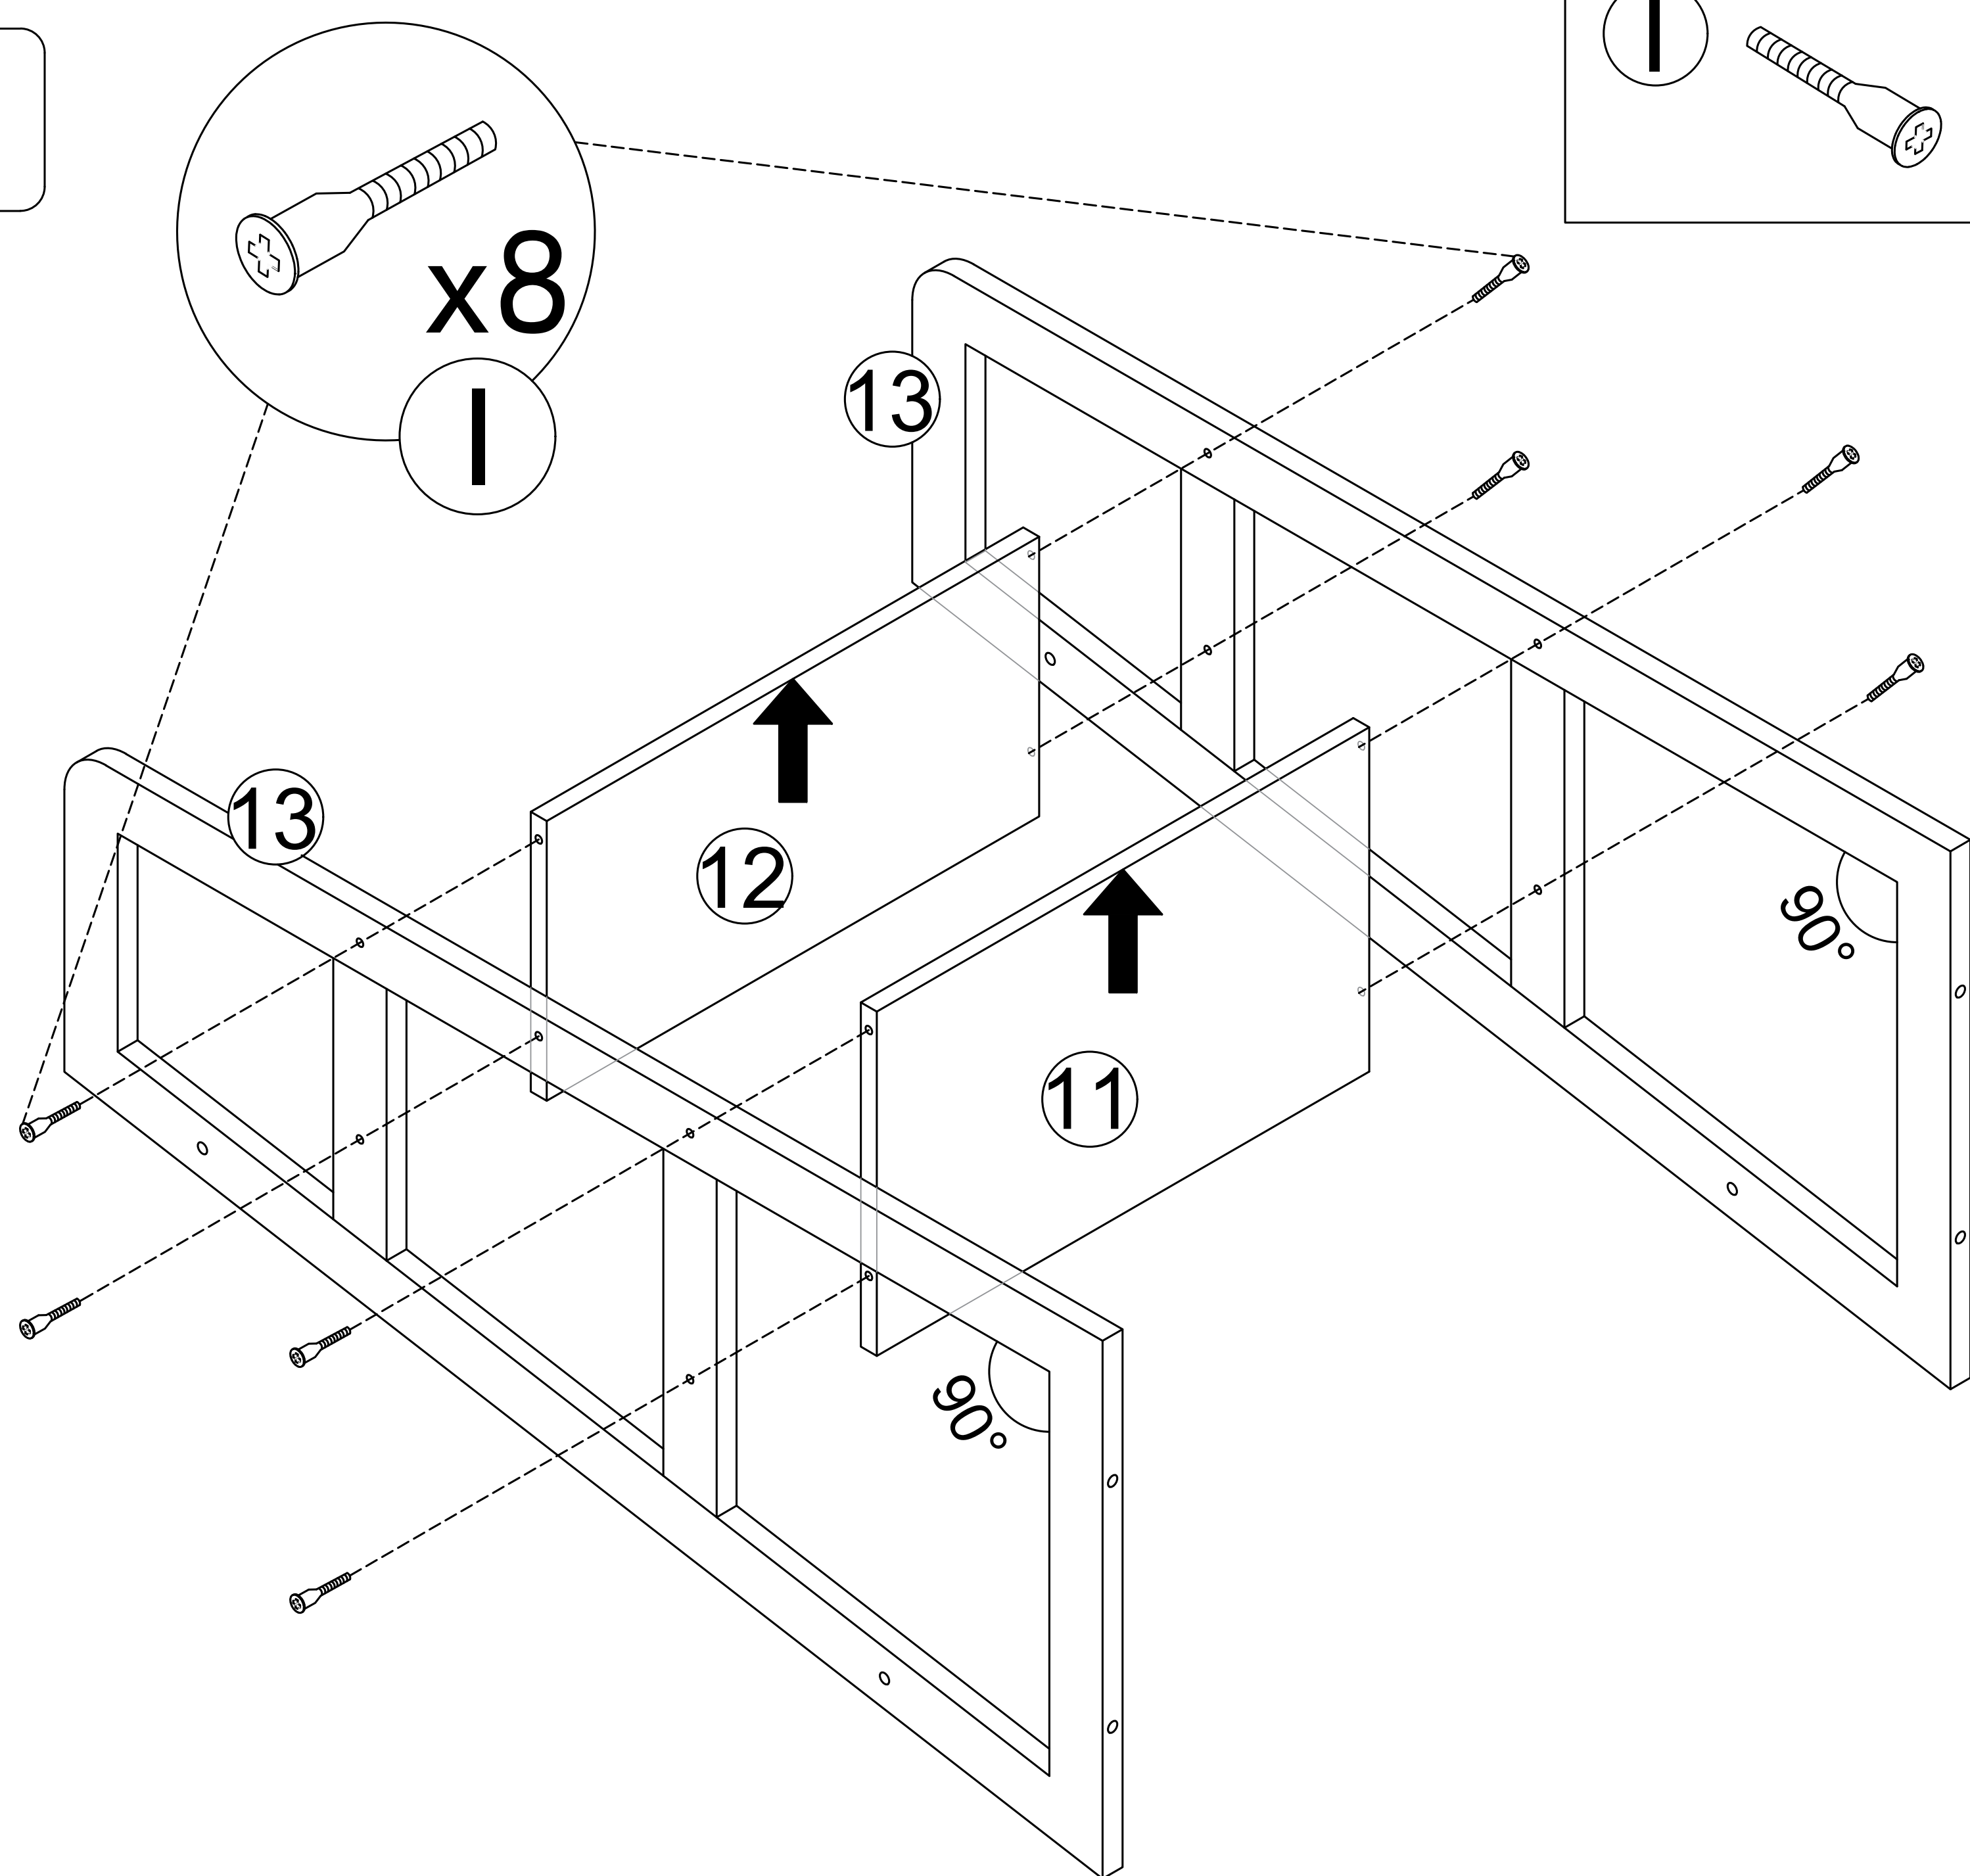


Step 19


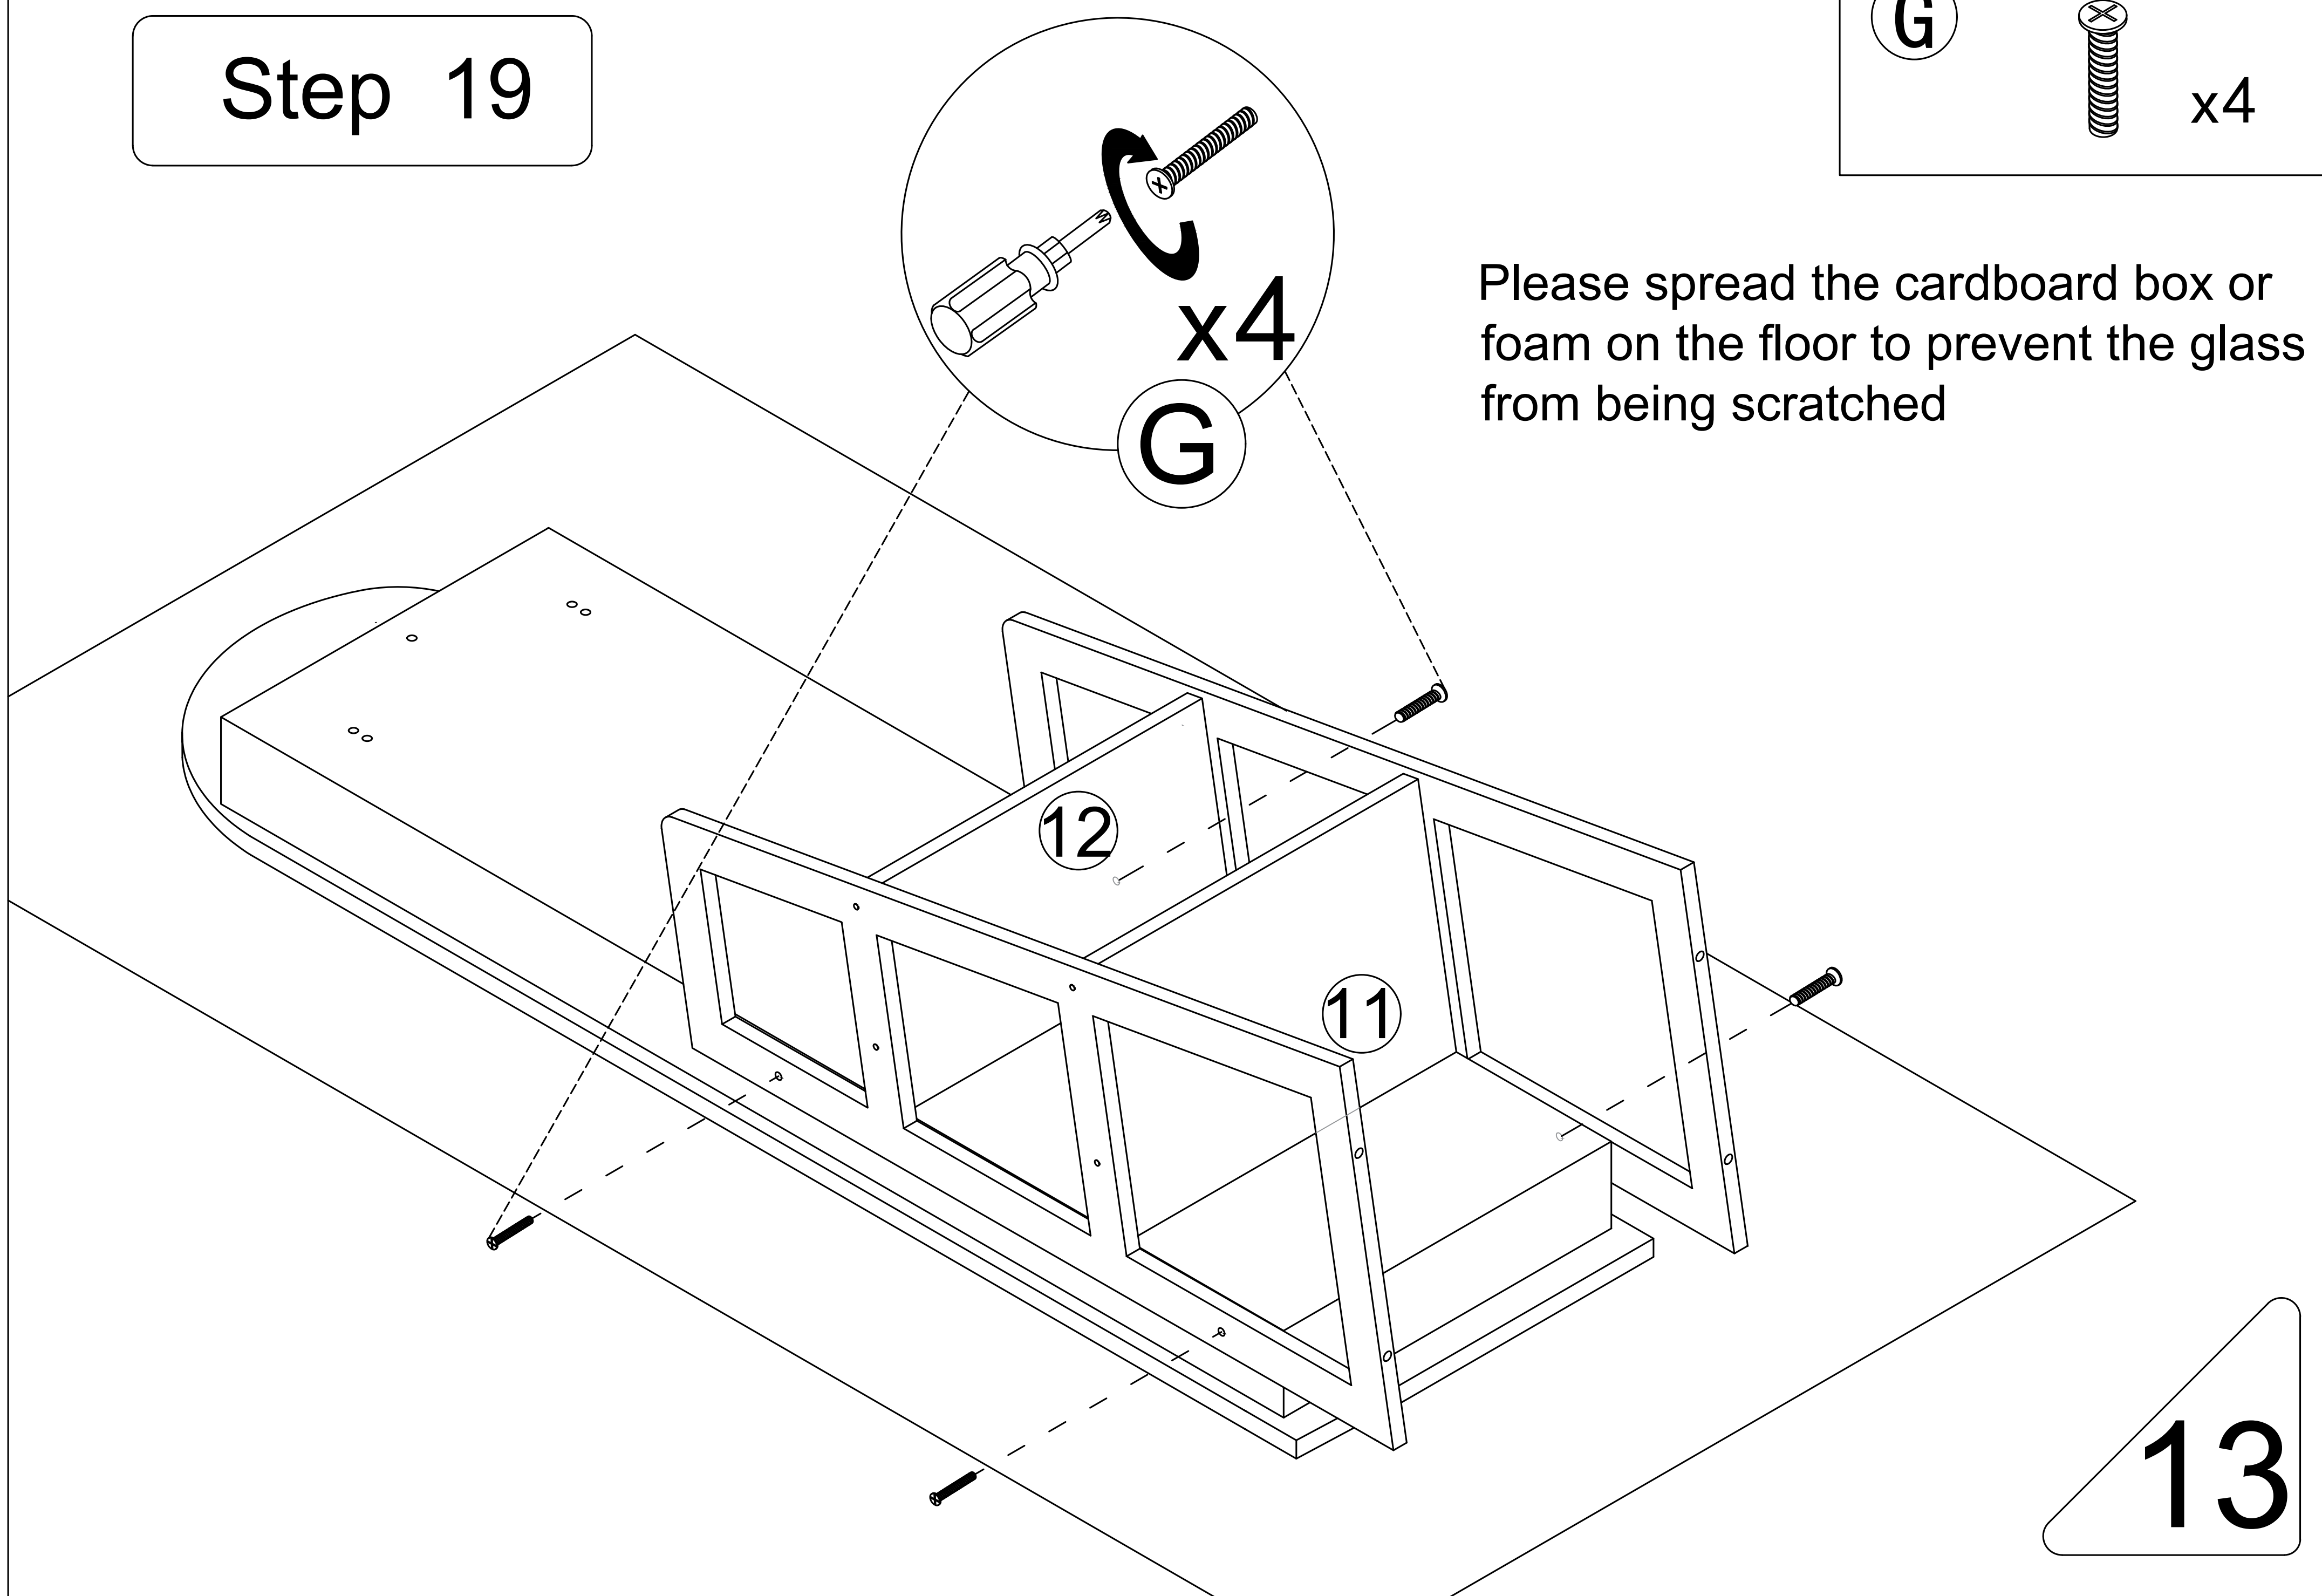


Step 20

H




x4

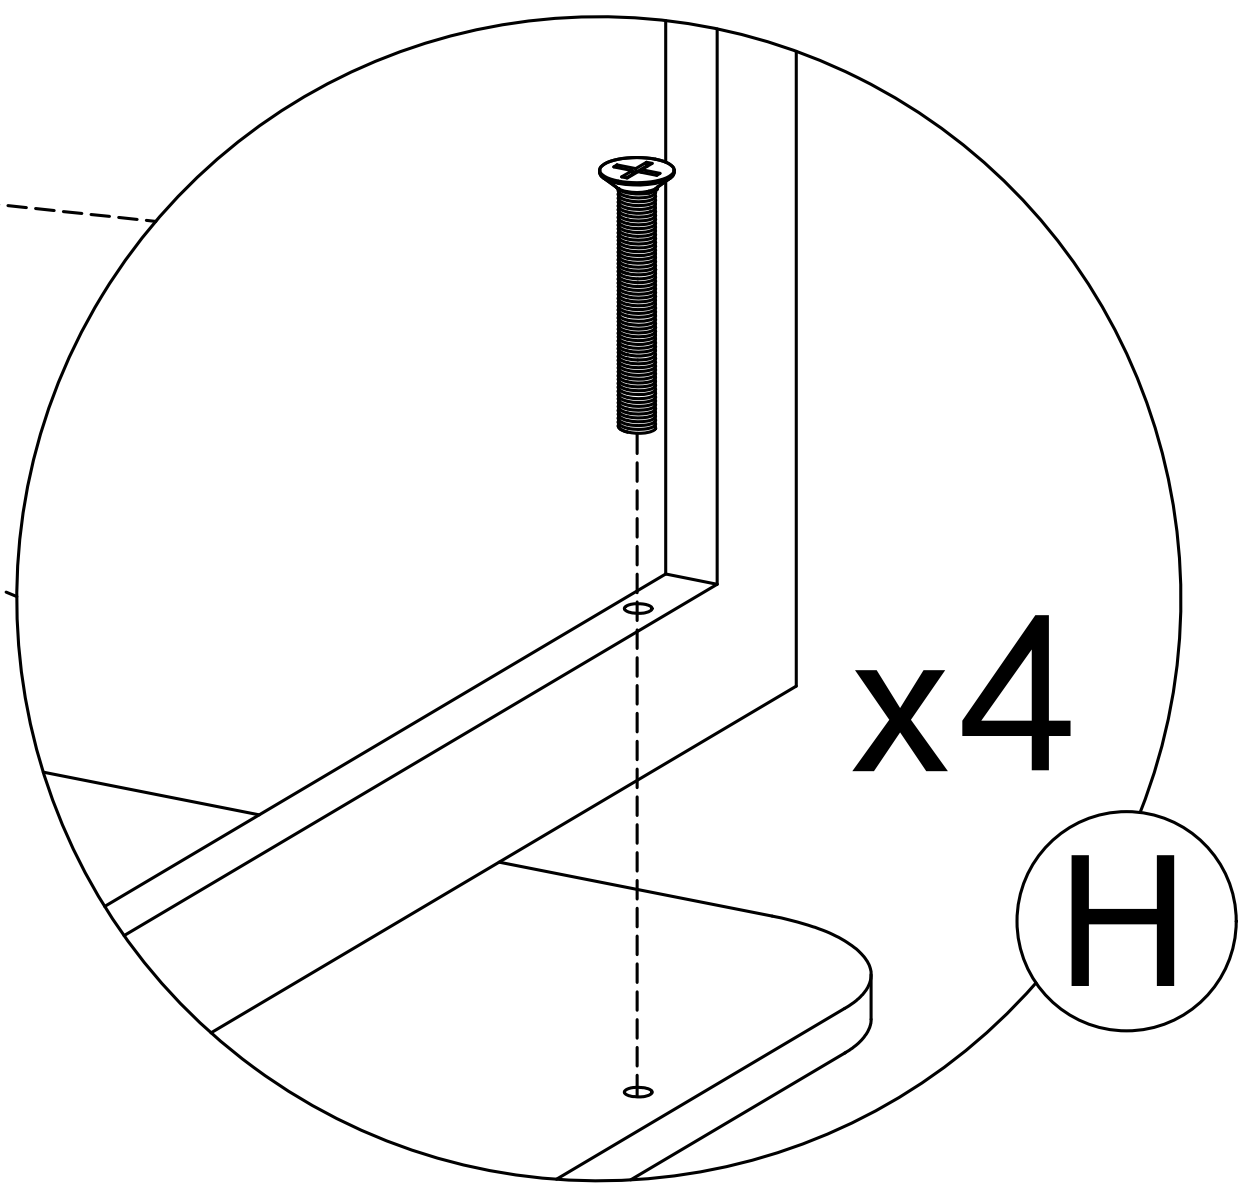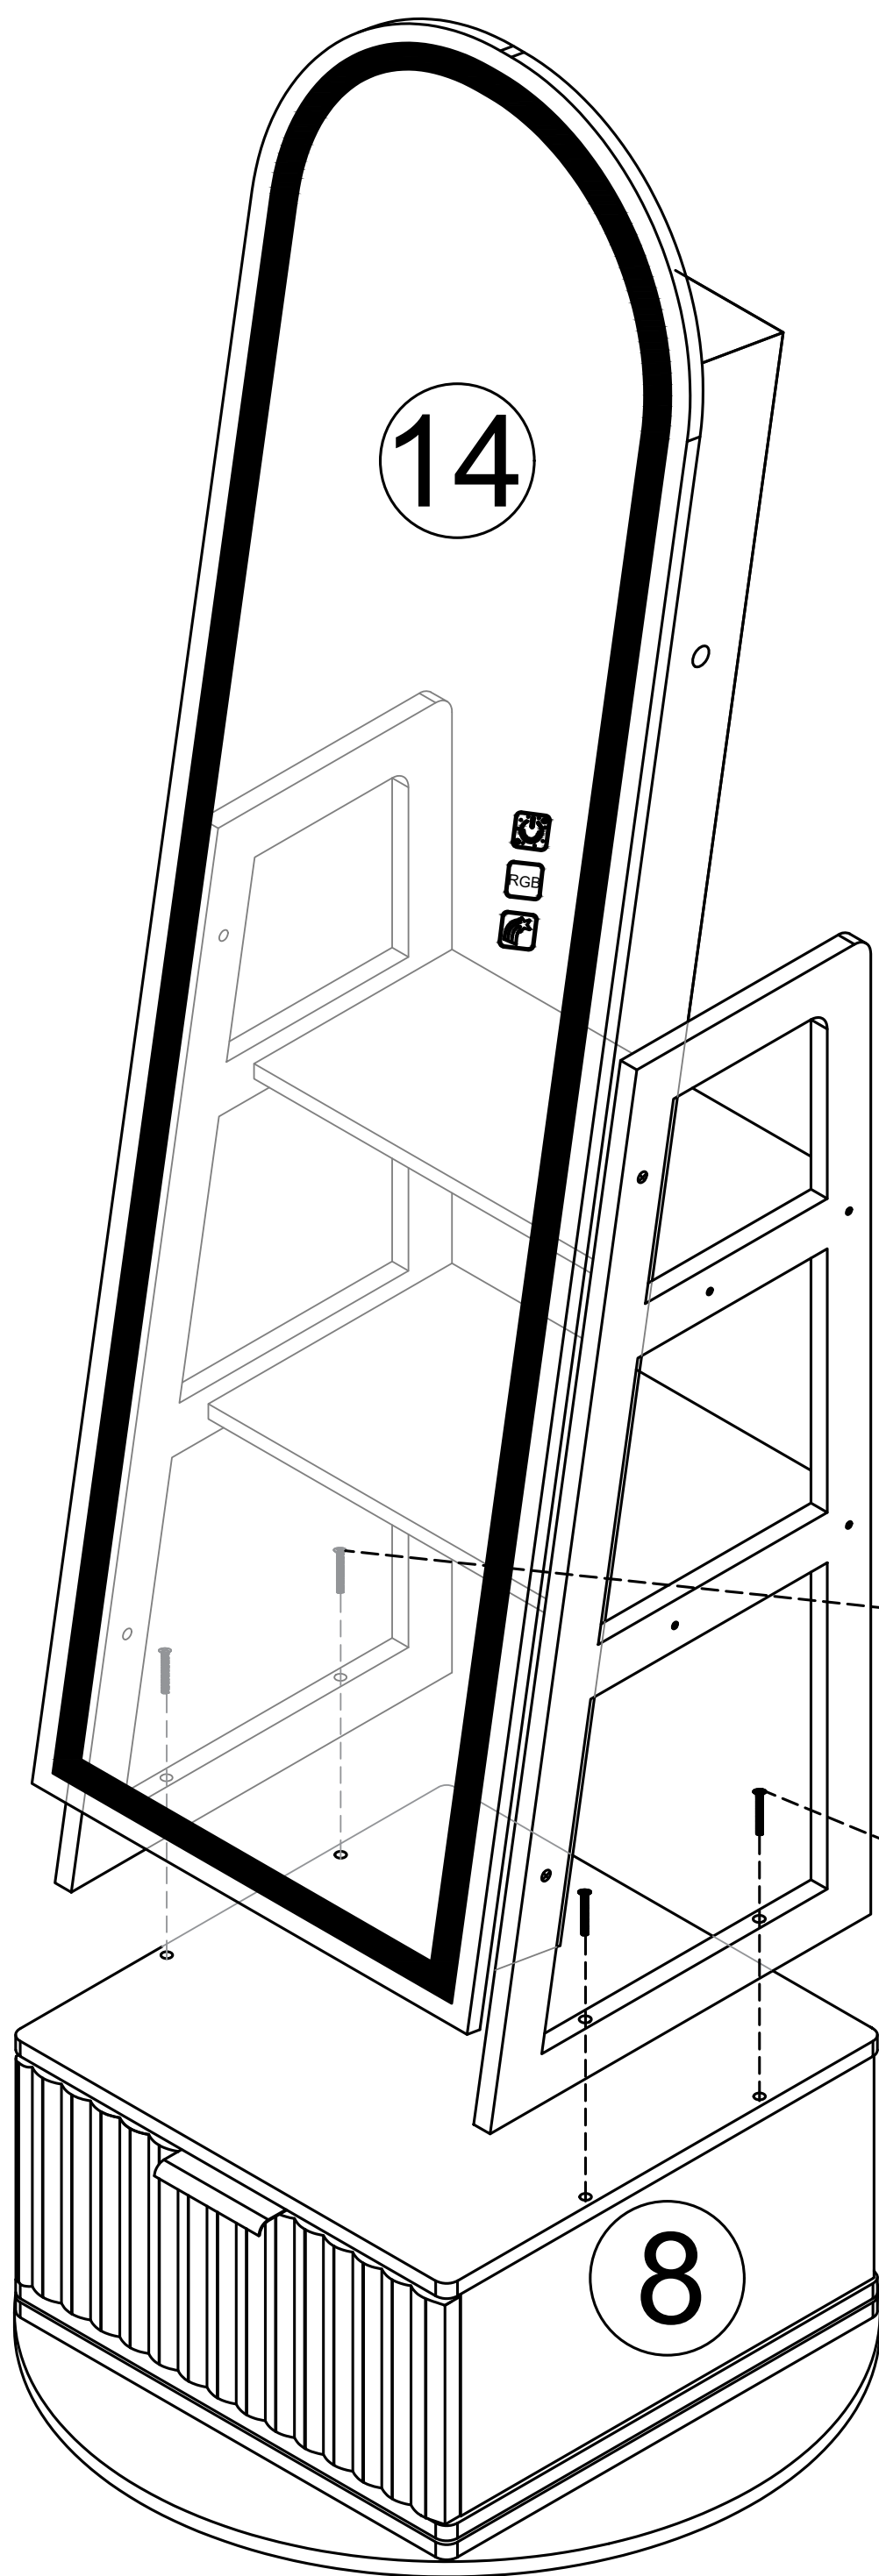

Step 21


L

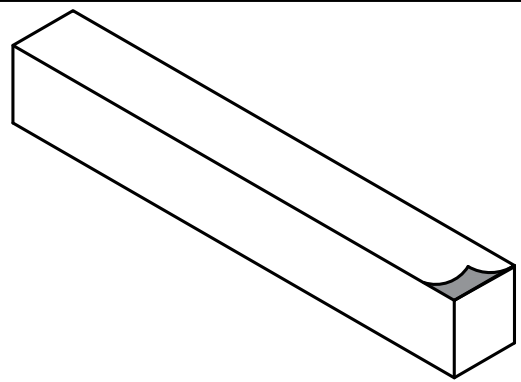


x2

Peel off the release paper and attach the accessory "L" to the boards "11" and "12".

F



x4




x2


J






x1





x1







x1

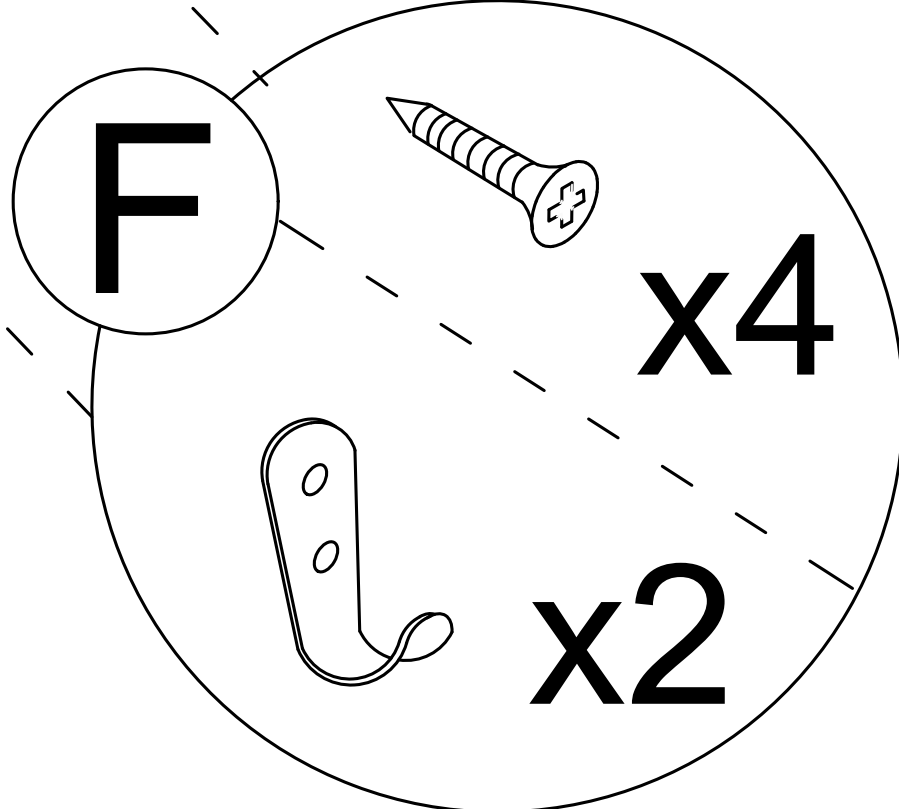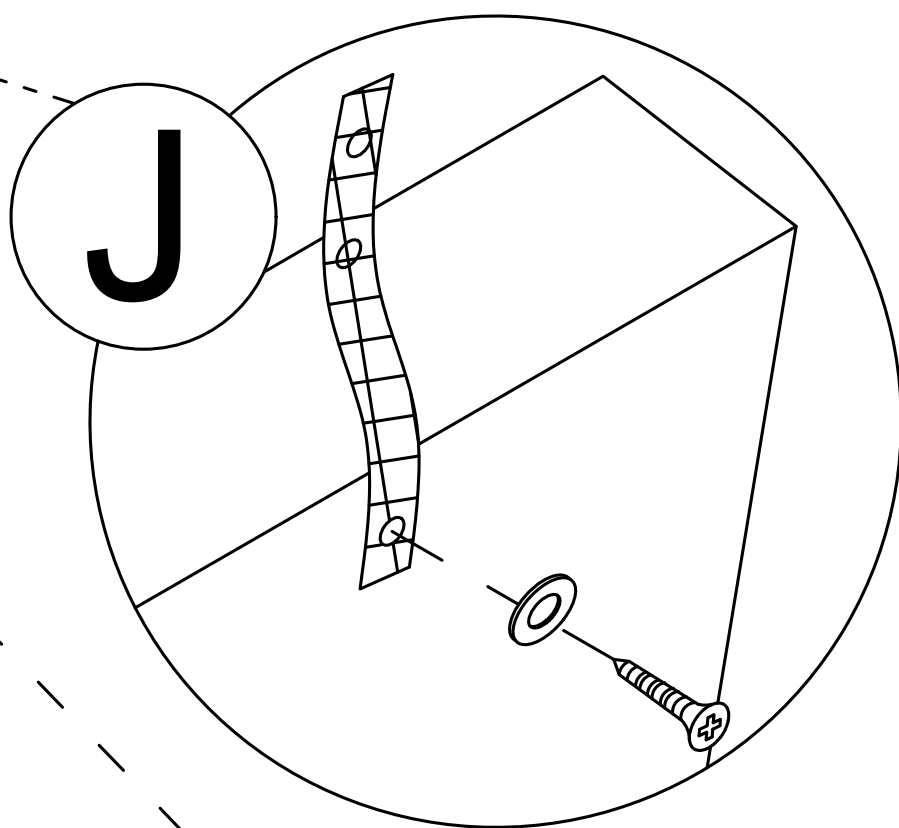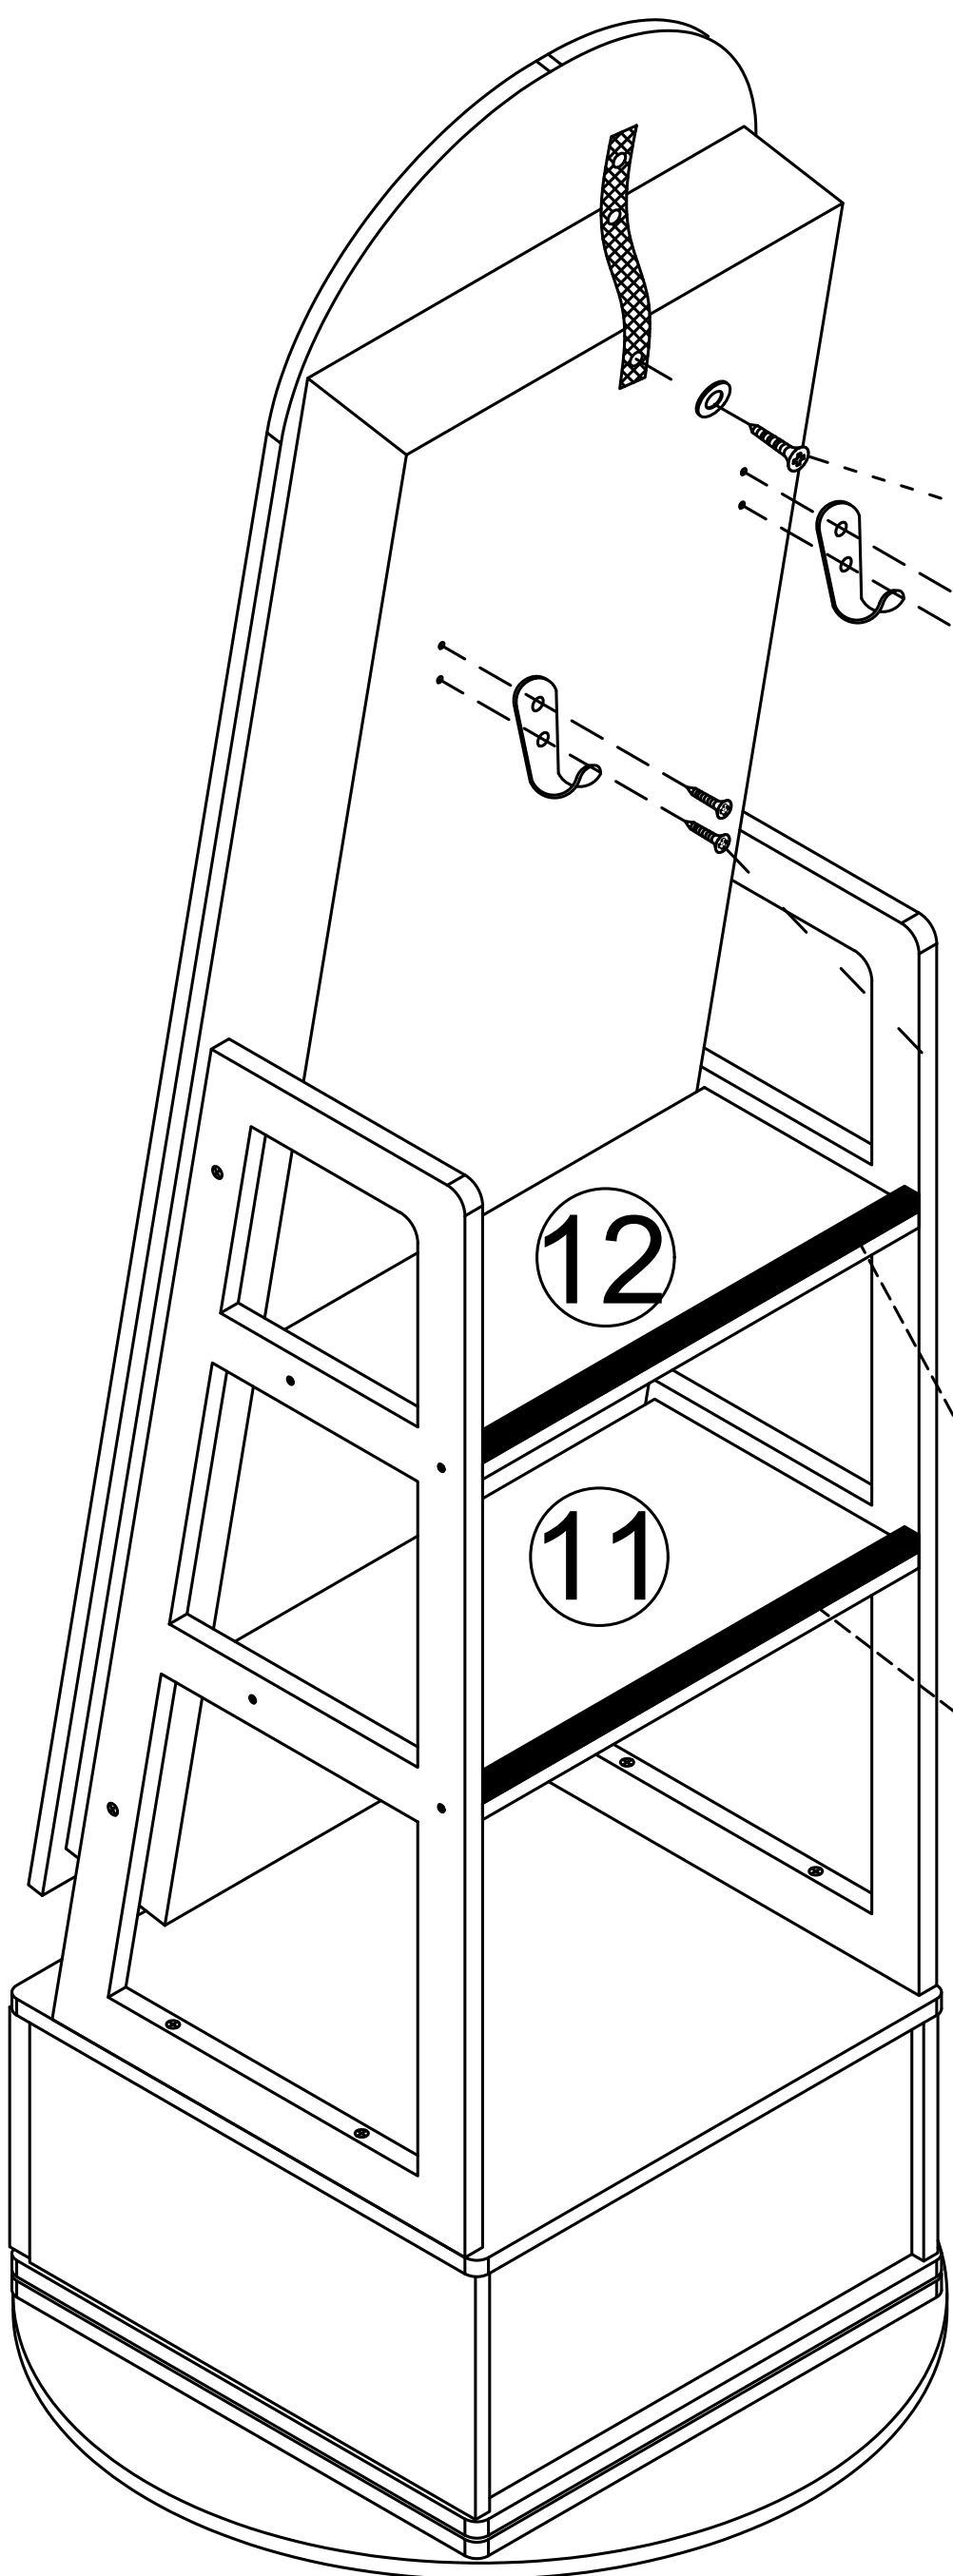


Step 22

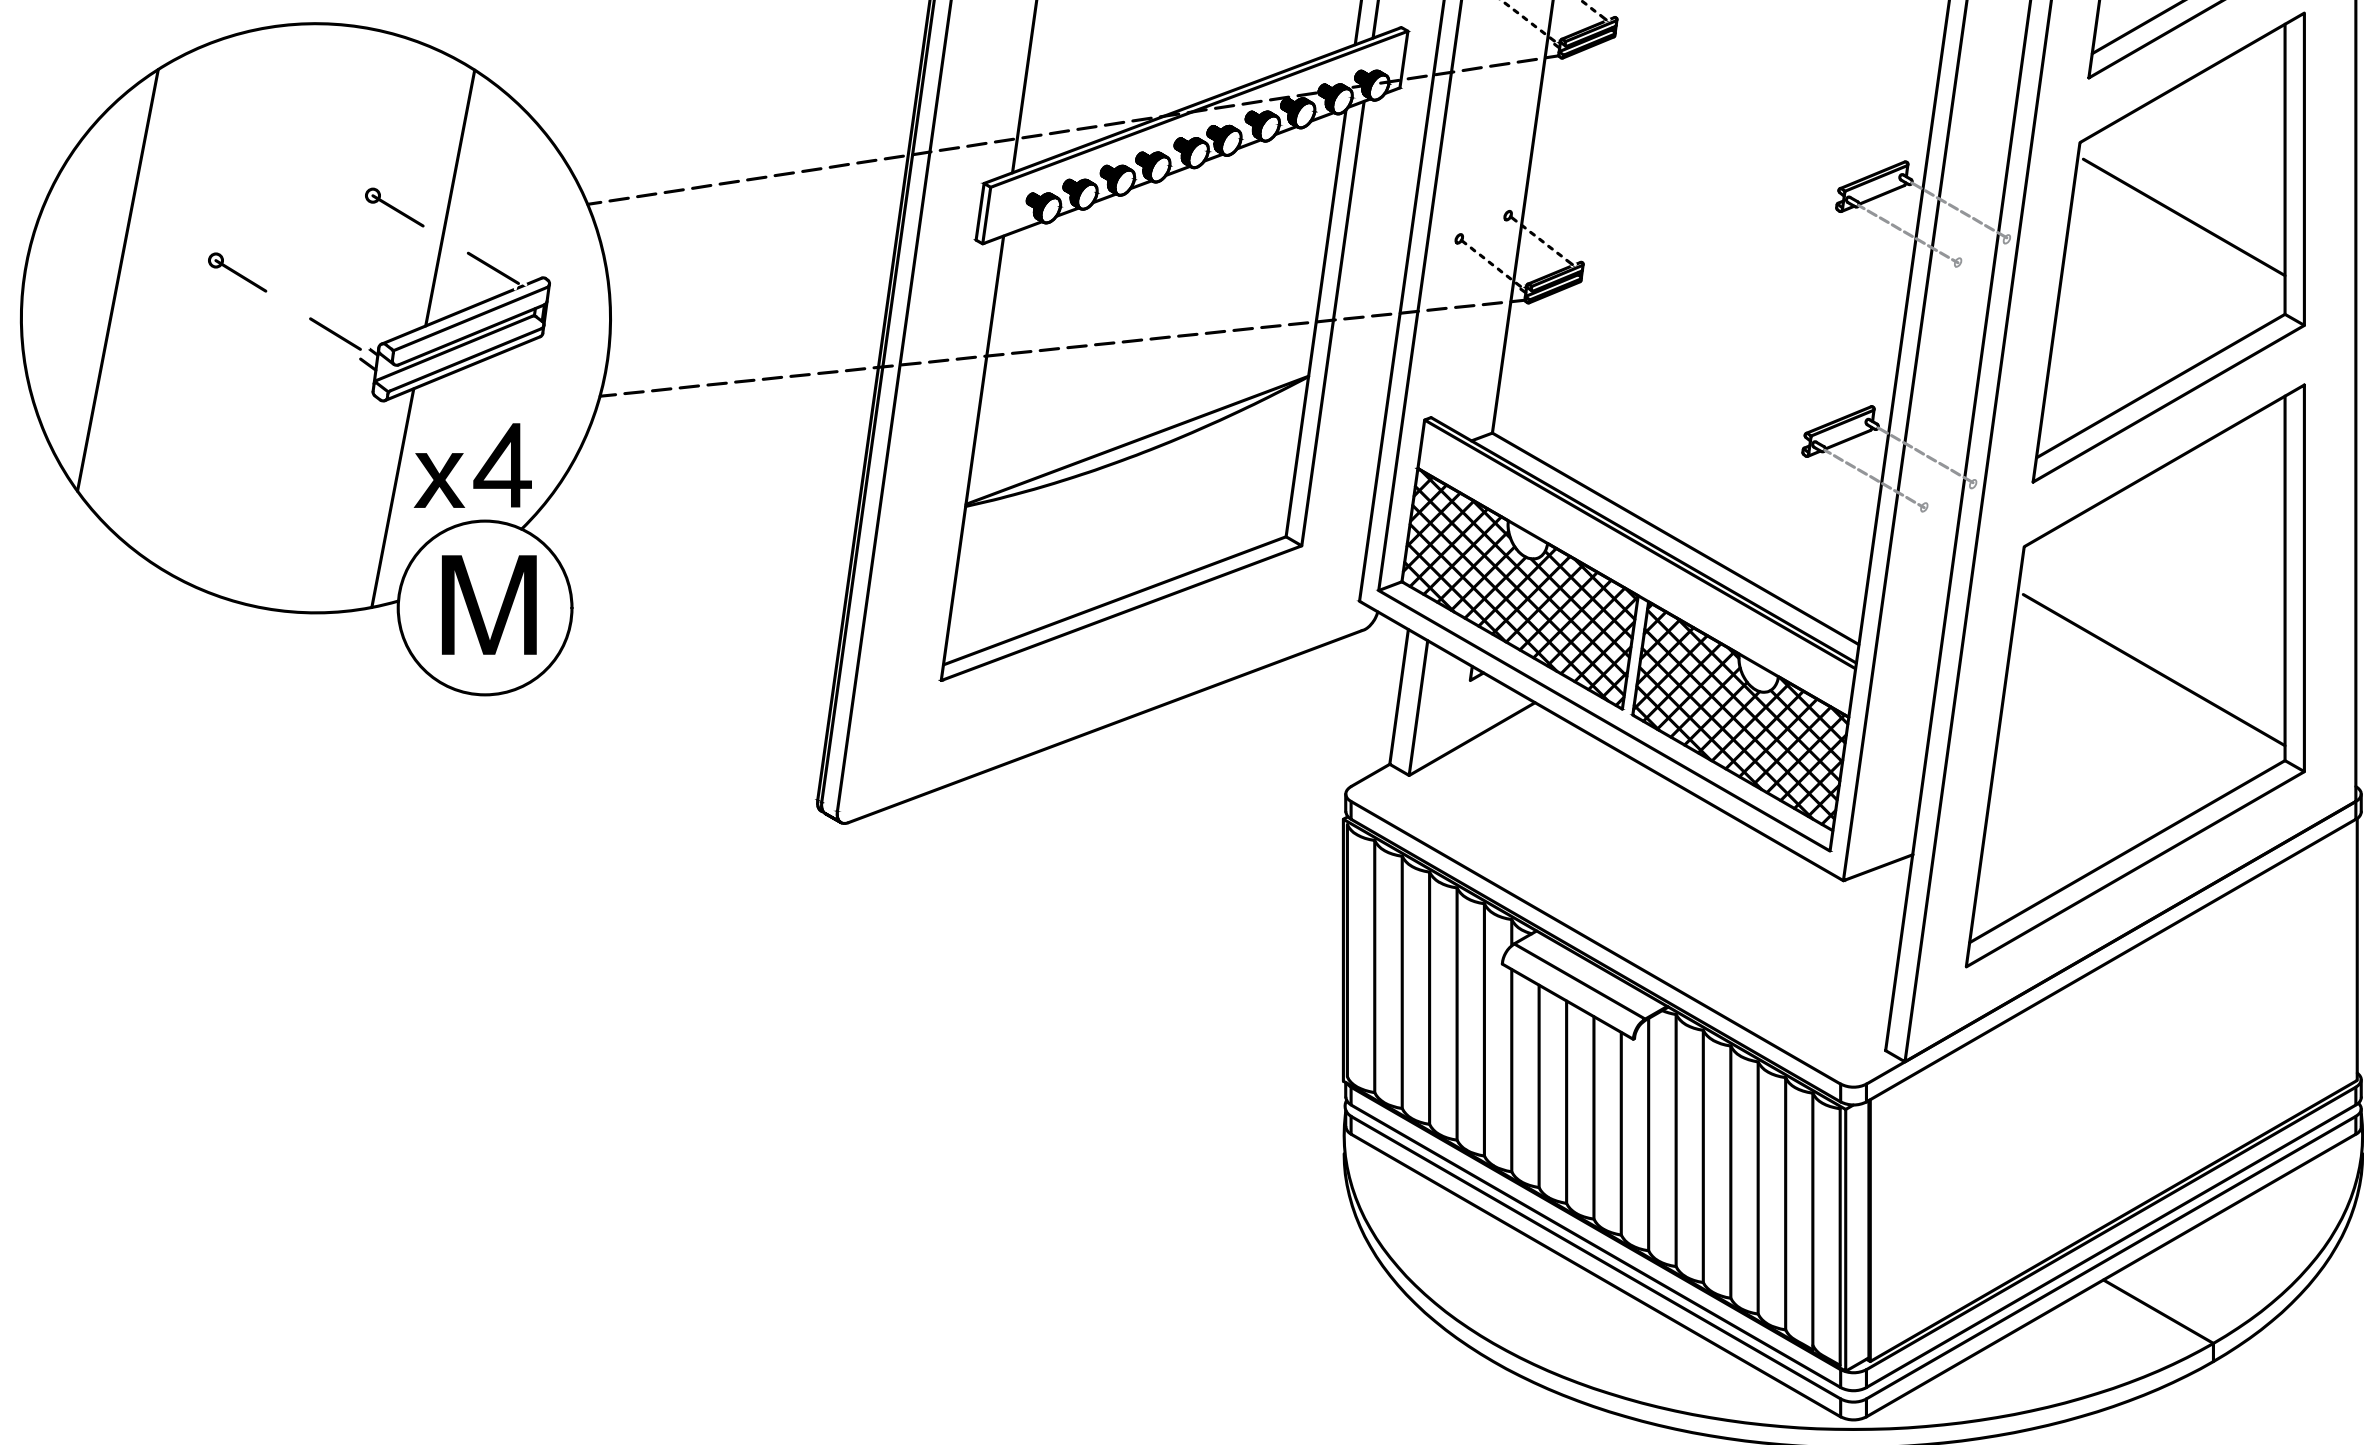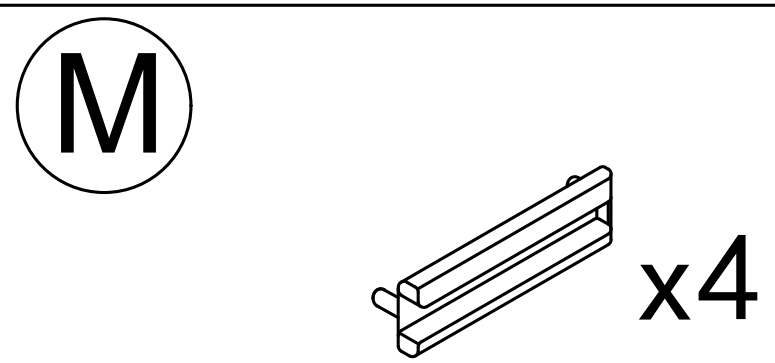


Battery installation
(Tip: use 3 AA Batteries)
need to bring your own

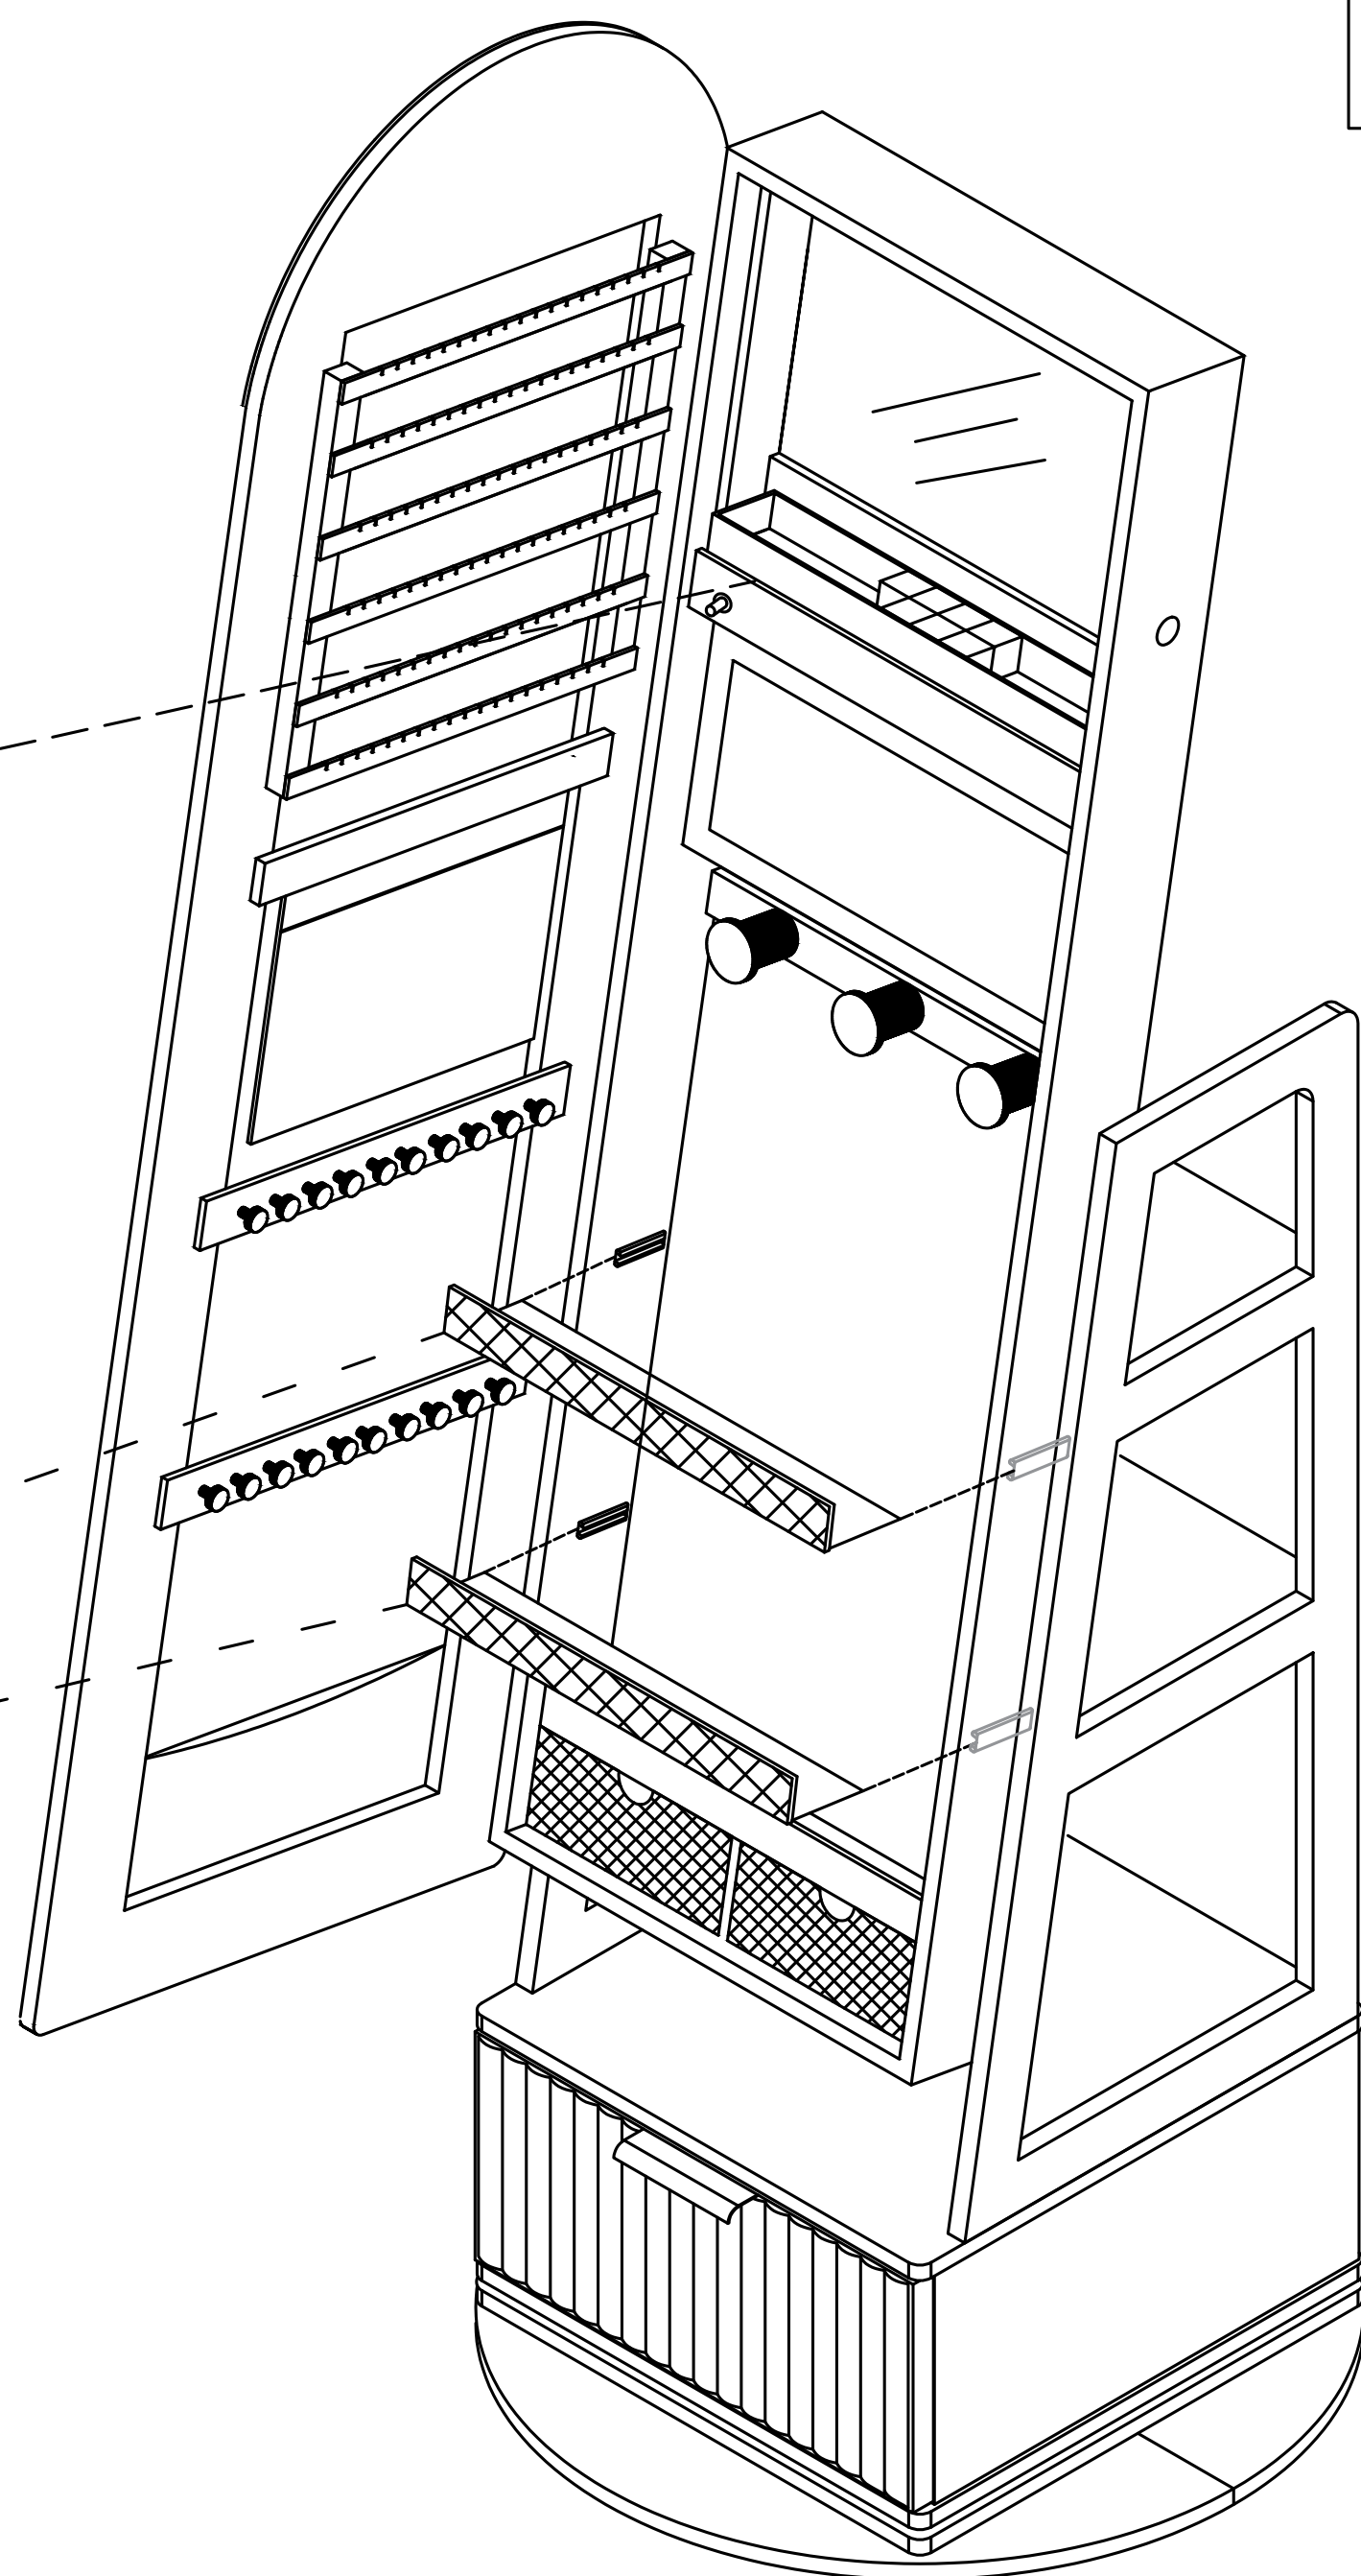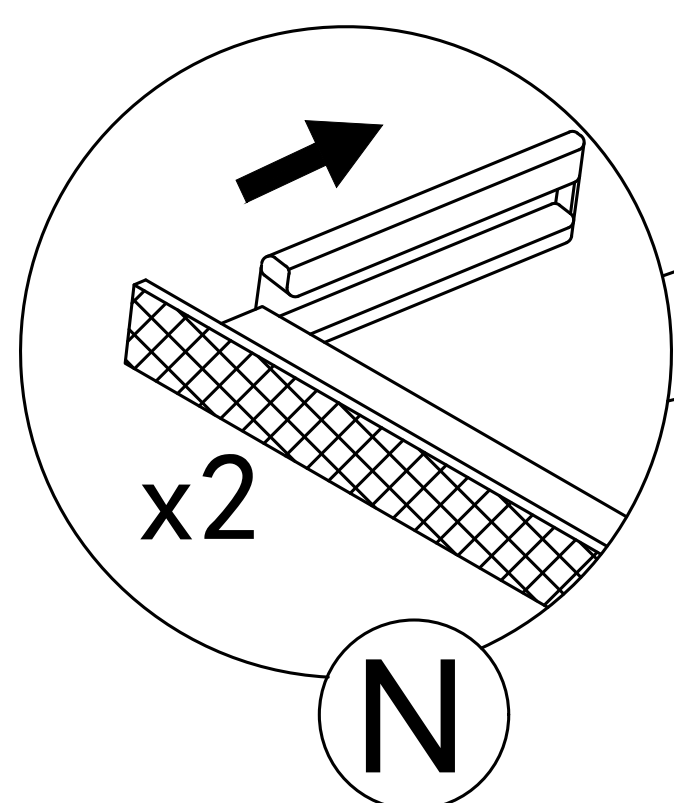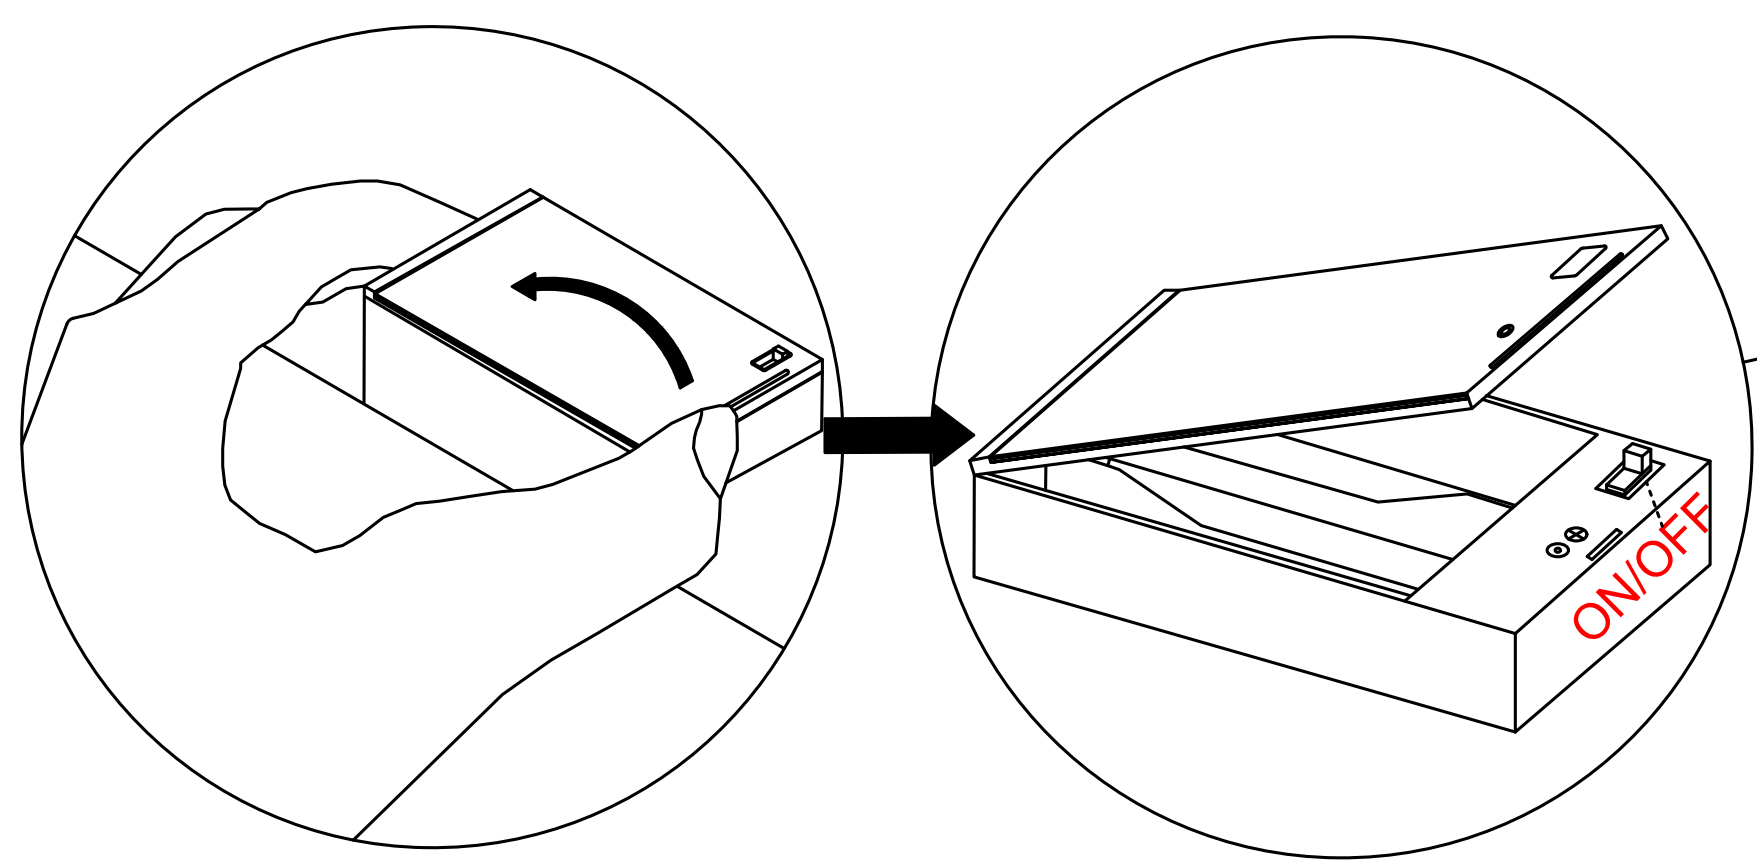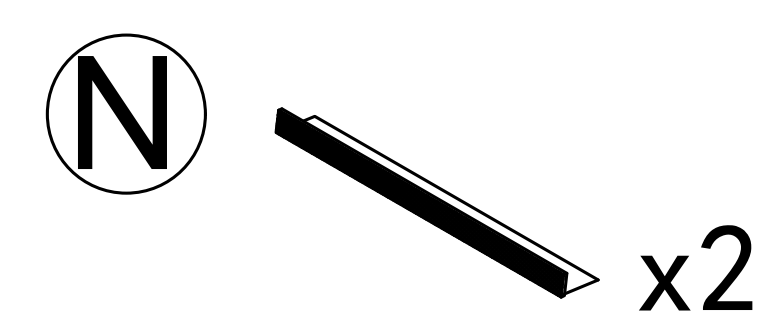

Step 22




x1

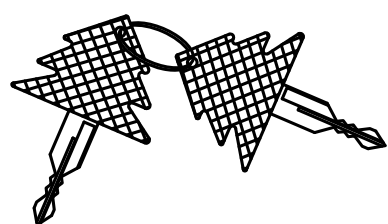

x1


J



x1




x1



x1

Wall Mount

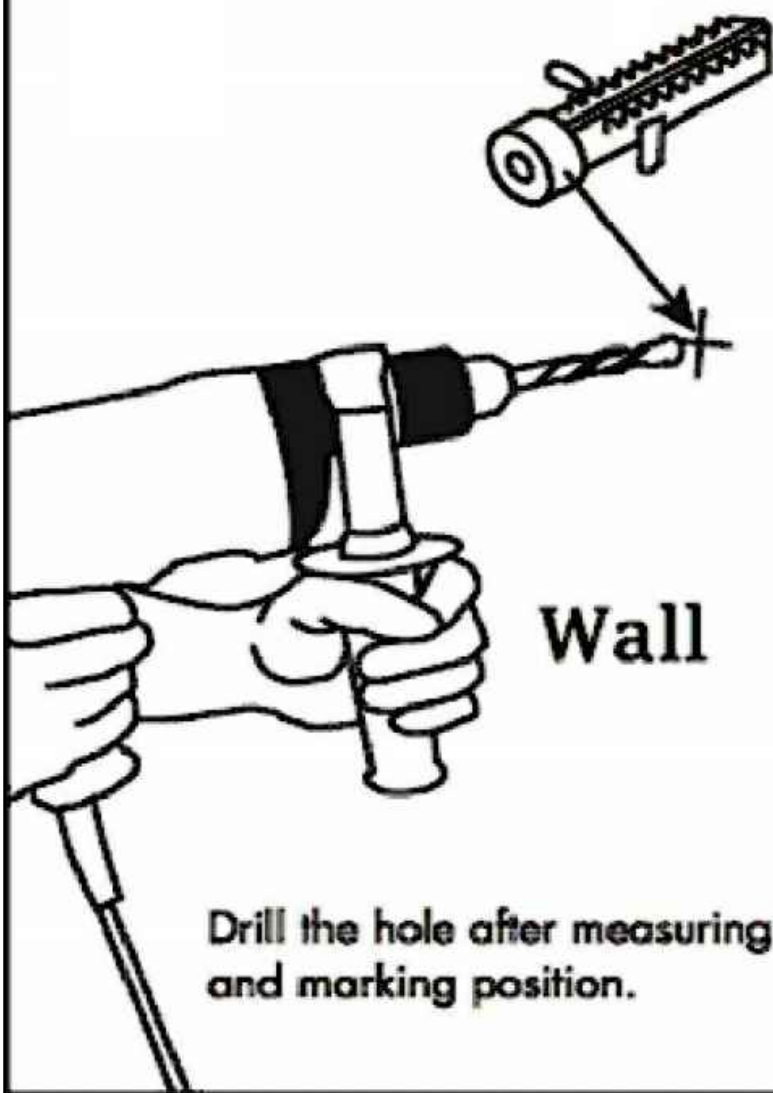


Wall


Drill the hole after measuring and marking position.



Wall

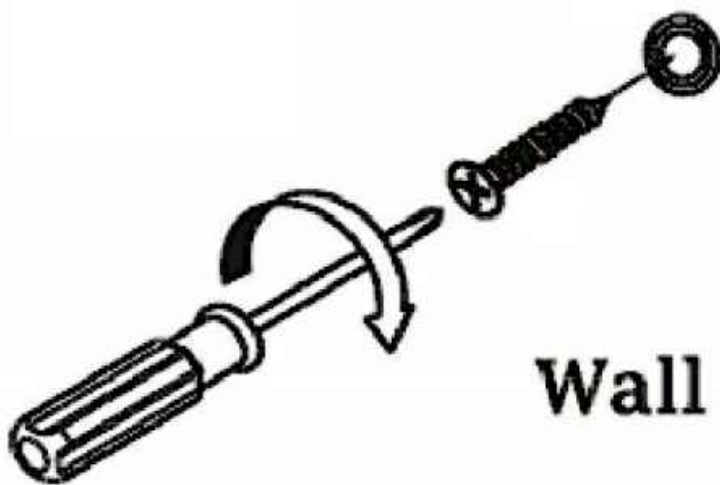




Wall

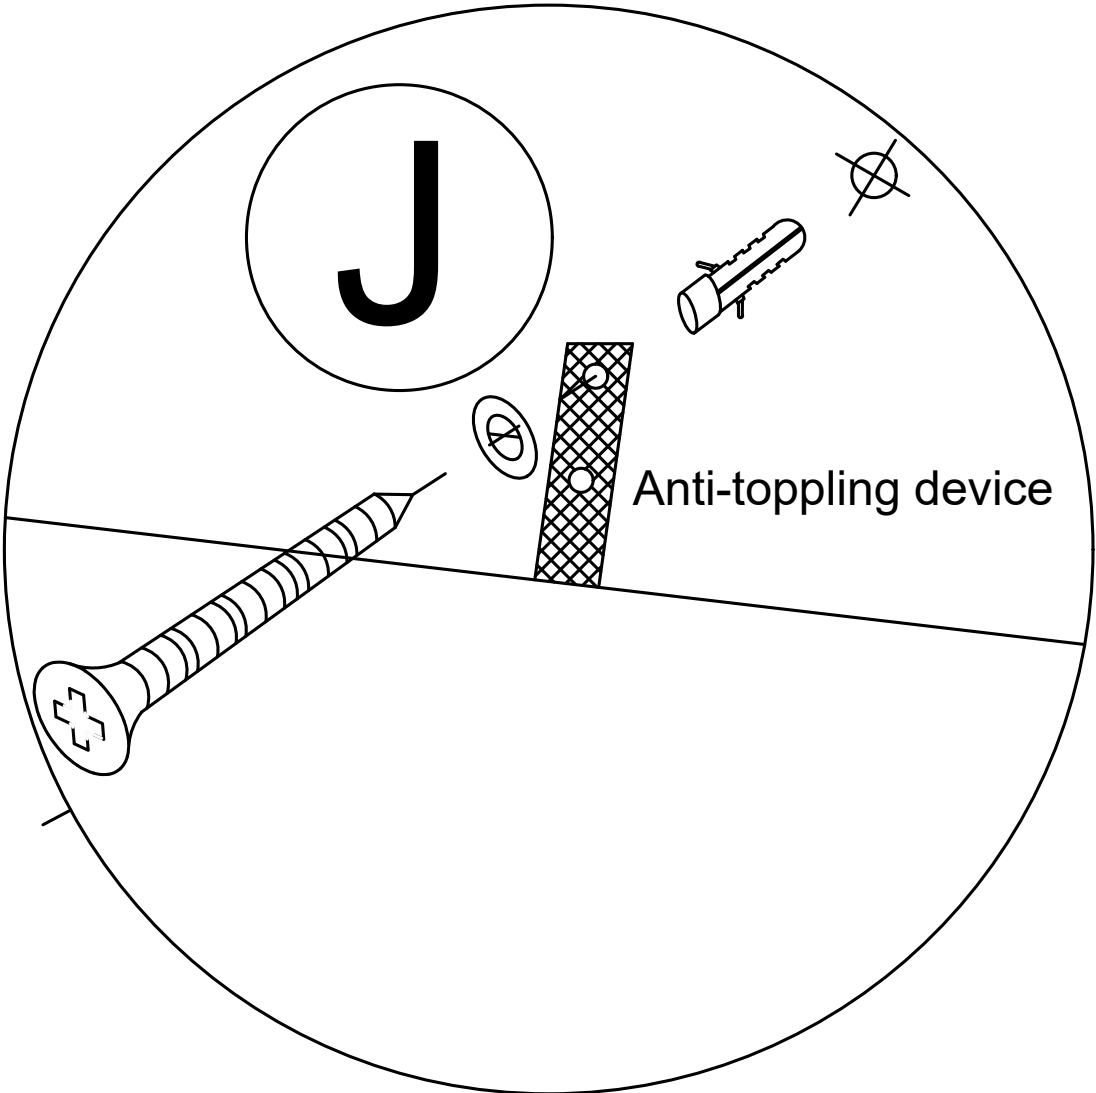

J

Anti-toppling device

Anti-toppling device

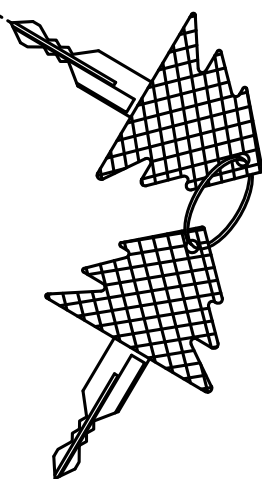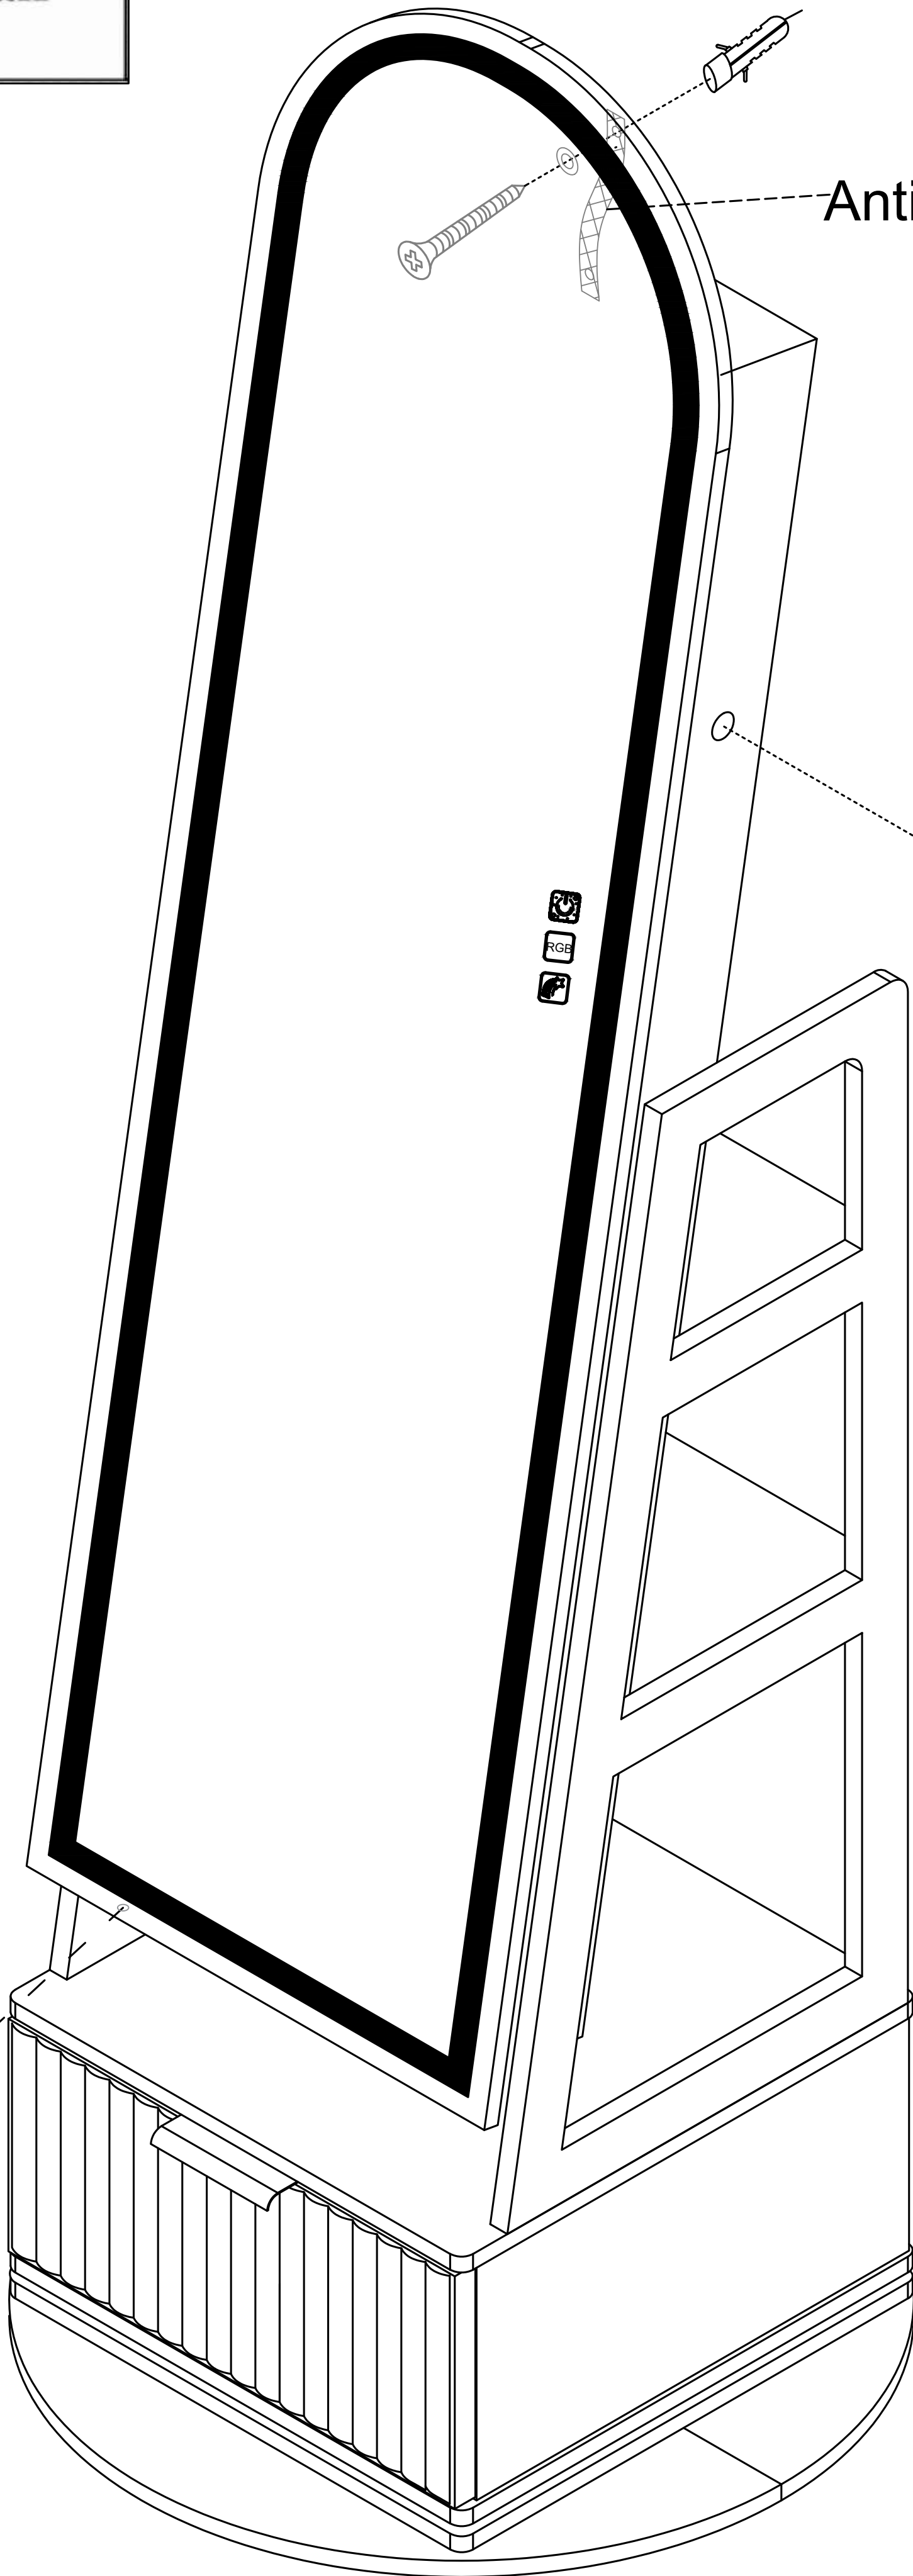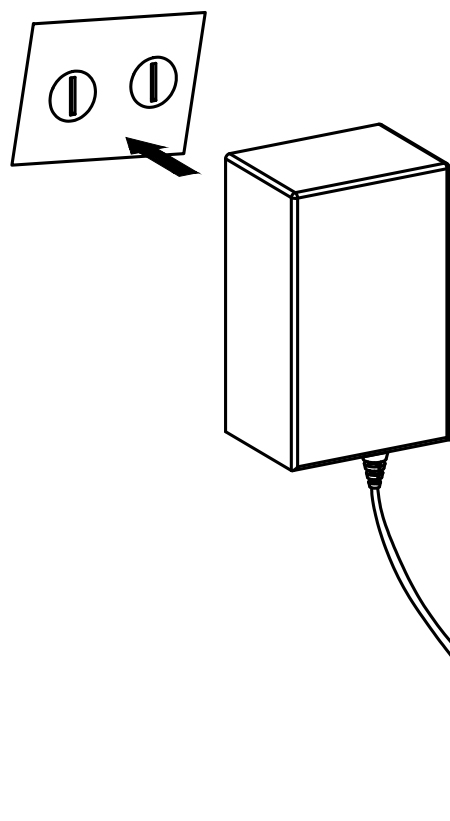

Touch button description




1. ON/OFF

2.Static Light Mode

(Long press to adjust brightness)

3.Dynamic Mode

(Long press to adjust speed)

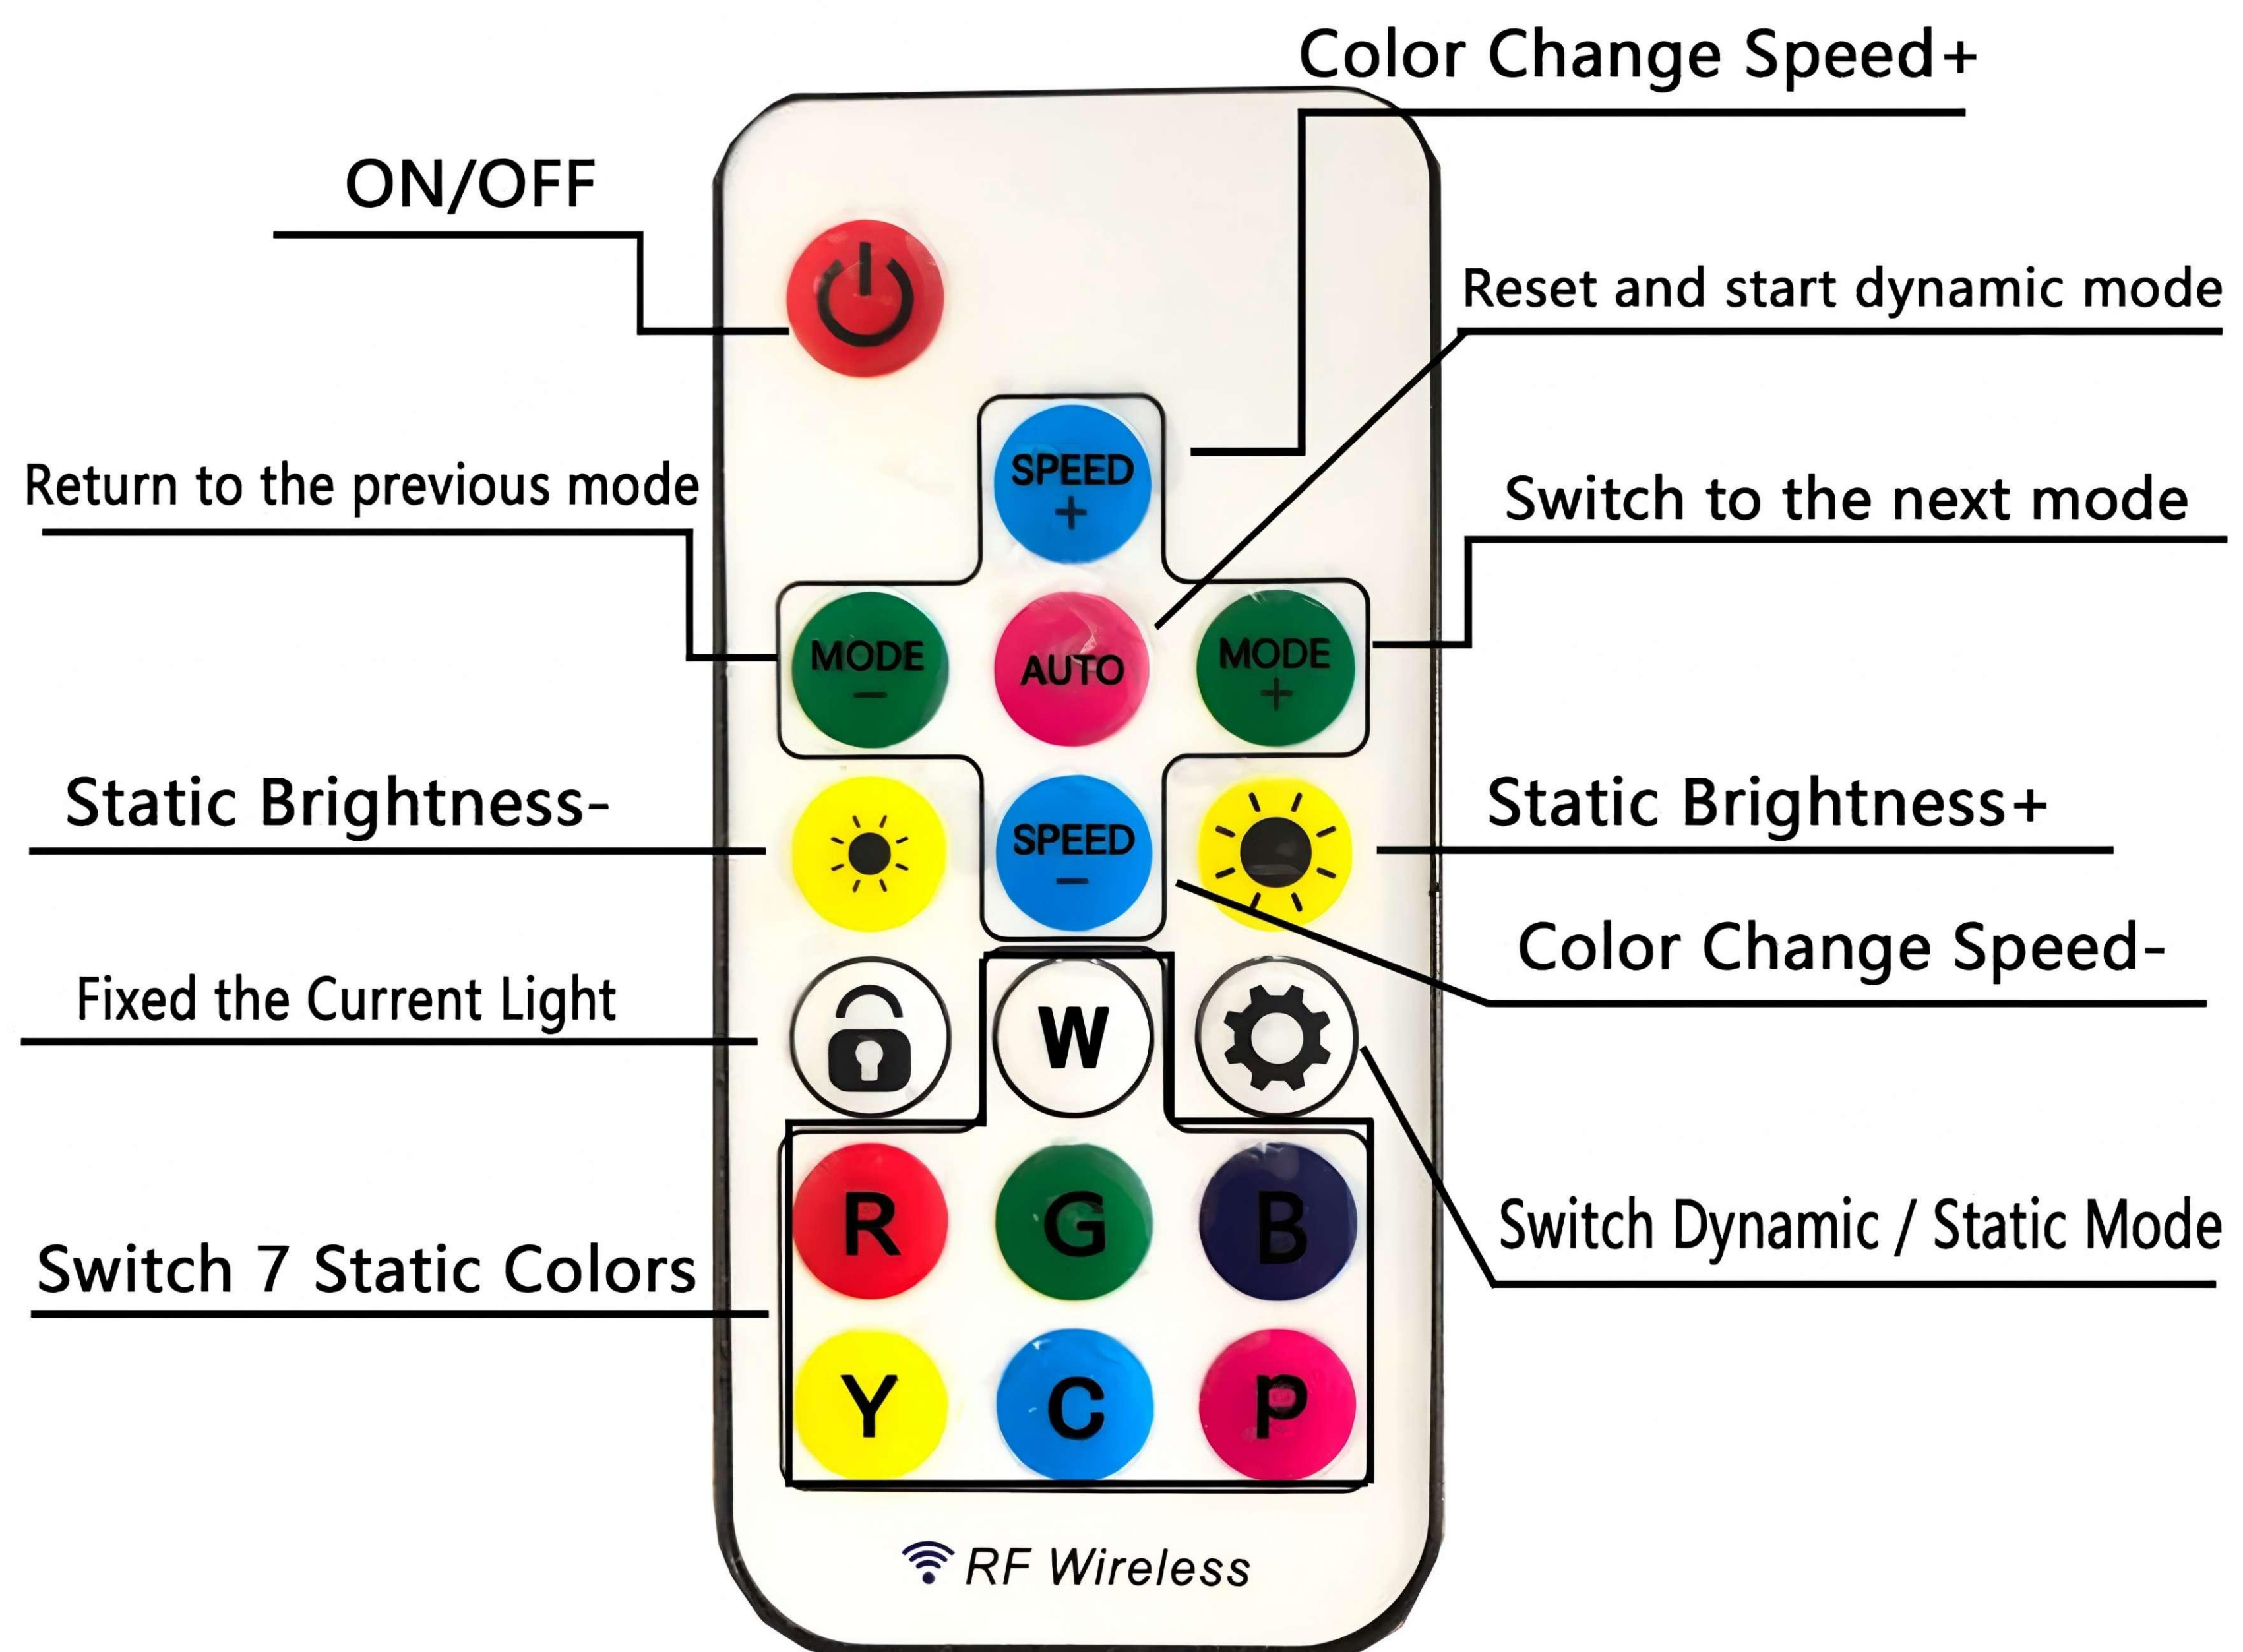

LED Lights Controller-use instructions

Remote Battery: CR205 3V

How to use the controller?

1. After inserting the DC power adapter, you can use the remote control to control the lamp. Press the "on/Off" button to turn on the light and enter the static light mode.

Long press the "on/Off" button to turn off the light.

2. There are 7 RGB Dynamic Modes. You can press the "MODE+/-" key to choose dynamic colors that you preferred and press the "Speed+/-" key to adjust color change speed.

3. There are 7 static colors: White / Red / Green/ Blue / yellow / ice blue/ pink light. You can press the "Brightness +/-" key to adjust the brightness.

4. You can press the "lock" key to fix the color you like. When you press the "Switch Dynamic /Static Mode" key, the light will change between dynamic mode and static mode.