



Karbon® | K-6228-C11

Articulating two-hole wall-mount kitchen sink faucet with 13-1/4" spout with Silver tube

Features

- Unique articulated-joint design directs water to any angle and folds out of the way when not in use
- Integral sprayhead provides laminar flow or ring spray at the touch of a button
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Single joystick lever handle is simple to use and makes adjusting water temperature easy
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)



Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372
ADA
ICC/ANSI A117.1
CSA B651

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Joystick

Flow Rate

Faucet Flow Rate: 1.5 gpm (5.7 l/min)

Material

- Premium metal and carbon fiber construction
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23723 Faucet cleaner


Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



Finished Wall Thickness	*
Thin Wall	0" - 5/8" (16 mm)
Standard Wall	1/2" (13 mm) - 1-1/8" (29 mm)
Thick Wall	1" (25 mm) - 1-5/8" (41 mm)

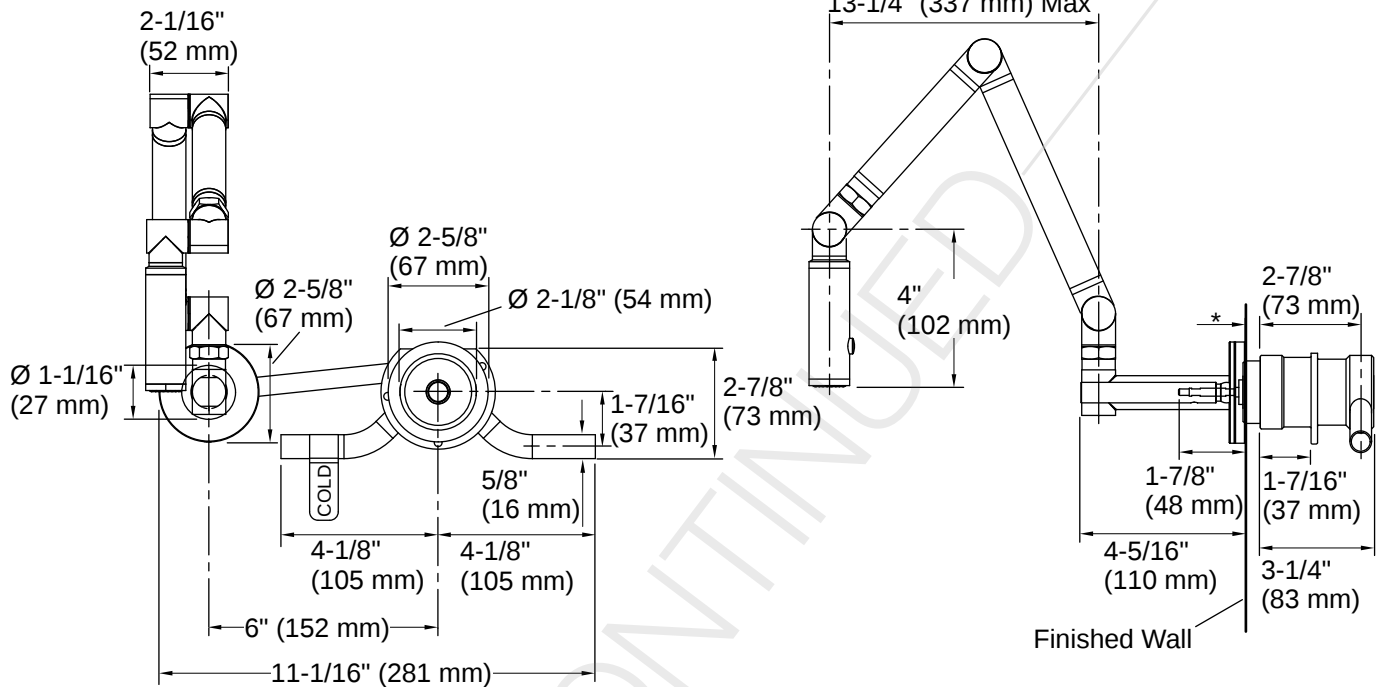

Installation

- Wall-mount
- Flexible supply lines simplify installation

Installation Notes

Install this product according to the installation instructions.

Do not locate the faucet in close proximity to a direct heat source or use the faucet as a pot filler. Exposure to excessive heat will damage the integral sprayhead and spout joints and may cause severe discoloration to the carbon fiber tubing.

Special framing and support considerations are required to mount the wall-mount valve.

One 2-3/16" (56 mm) diameter cut-out hole is required for the valve. One 1-3/16" (30 mm) diameter cut-out hole is required for the spout.

ADA compliant for faucet handles only

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

