
13.12 ft × 13.12 ft × 10.50 ft **WQOT328**

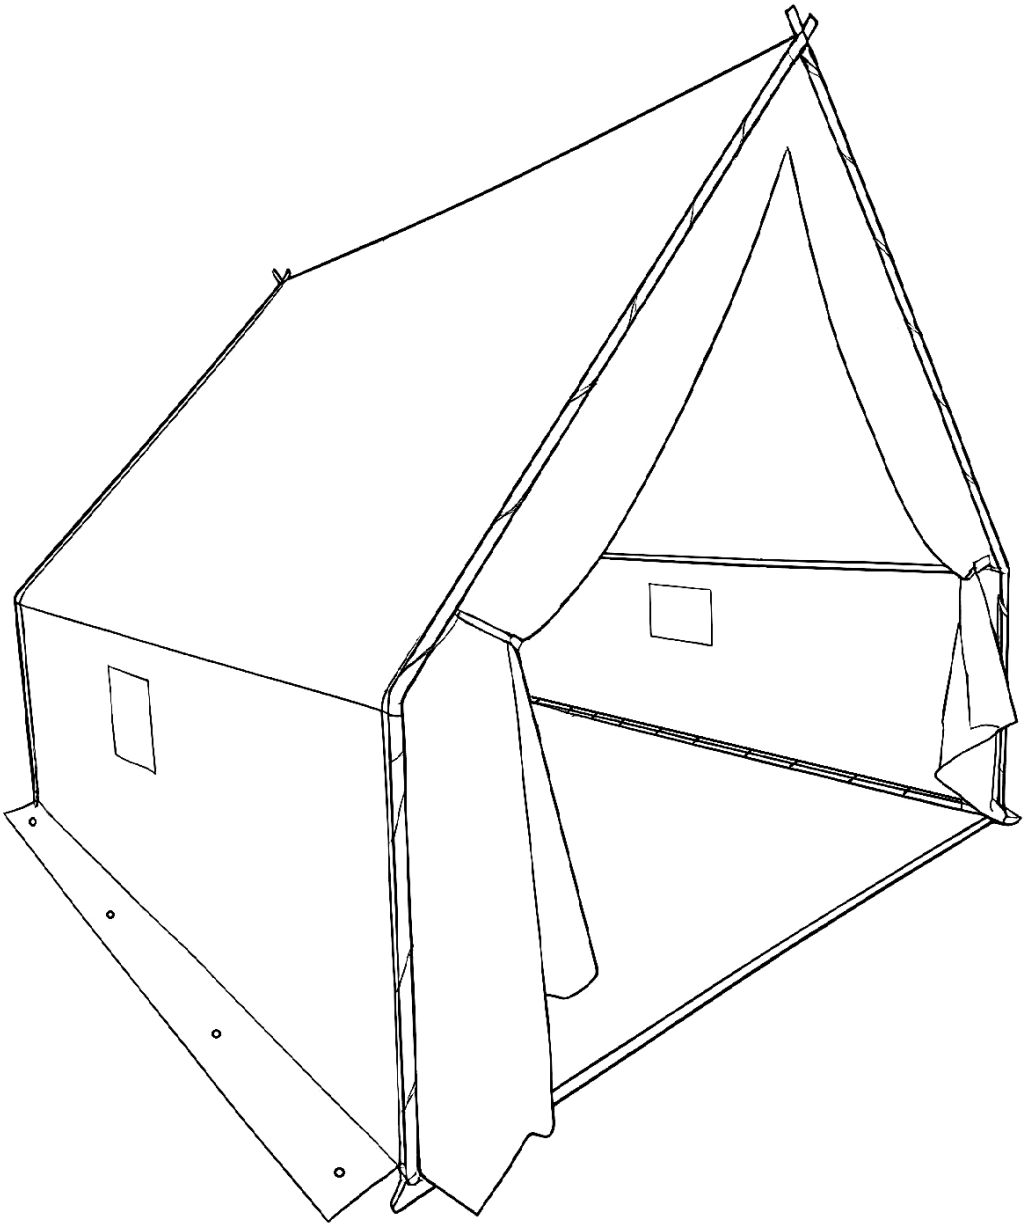

Installation instructions

⚠ Safety Warning:

Never work alone when using ladder for high- altitude assembly. Two- person operation is mandatory: one person works on ladder, another person holds and guards ladder on ground to avoid slipping or tipping- over. Place ladder on firm and flat ground. Do not stand on the top two rungs of ladder.

SEVERAL ATTEMPTS


- When you install this product, please refer to the following diagram.
- the following tools are not included and needed for assembly.




Ladder




scissors

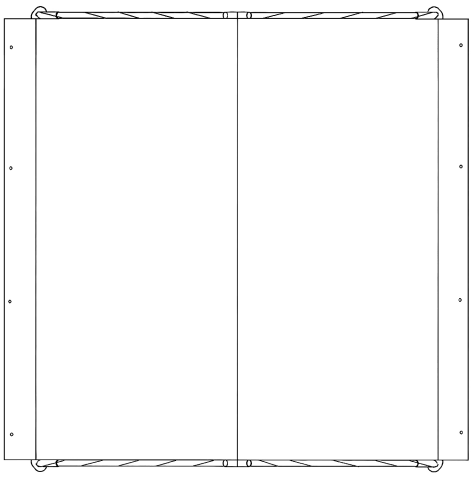

Top

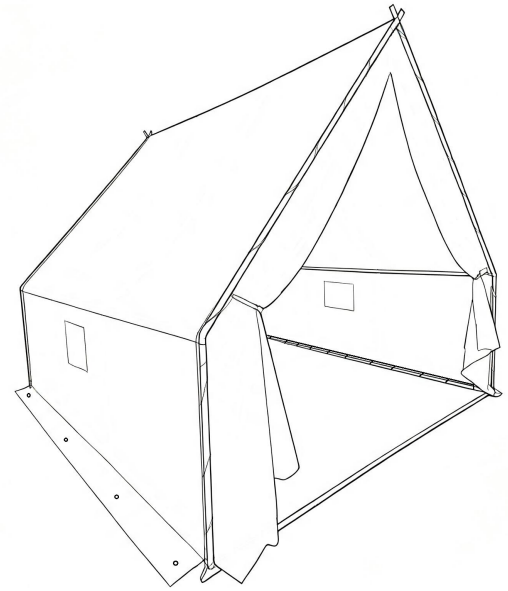


Left

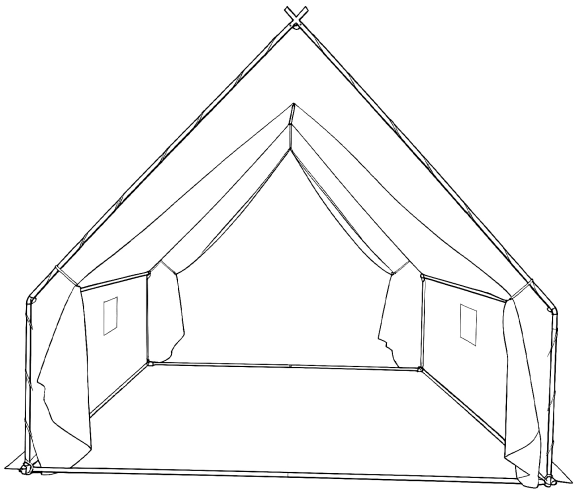


Front


ACCESSORIES LIST Hardware Included



A
(2PCS)



B
(4PCS)




C
(4PCS)




D
(4PCS)



E
(4PCS)




F
(7PCS)



G
(4+7PCS)



H
1PC



1
(30PCS)



2
(30PCS)




3
(1PC)



4
(4PCS)



5
(12PCS)



6
(2PCS)




7
(2PCS)

ACCESSORIES LIST Hardware Included

Part	Description	Quantity
A	5-way top connector	2
B	3-way connector	4
C	Base 3-way hub	4
D	ϕ38×750mm short diagonal tube (single-telescoping)	4
E	ϕ38×1085mm upright tube (double-telescoping)	4
F	ϕ38×1955mm cross tube (single-telescoping)	7
G	ϕ38×1955mm long diagonal / cross tube (double-telescoping, with spring-loaded ball)	4+7
H	Tent Canopy	1
1	8×45 screw	30
2	Nut	30
3	30m Long Rope	1
4	1.85m Guy Rope	4
5	L-Shaped Ground Peg	12
6	Wrench	2
7	Gloves	2


EXPLODED VIEW

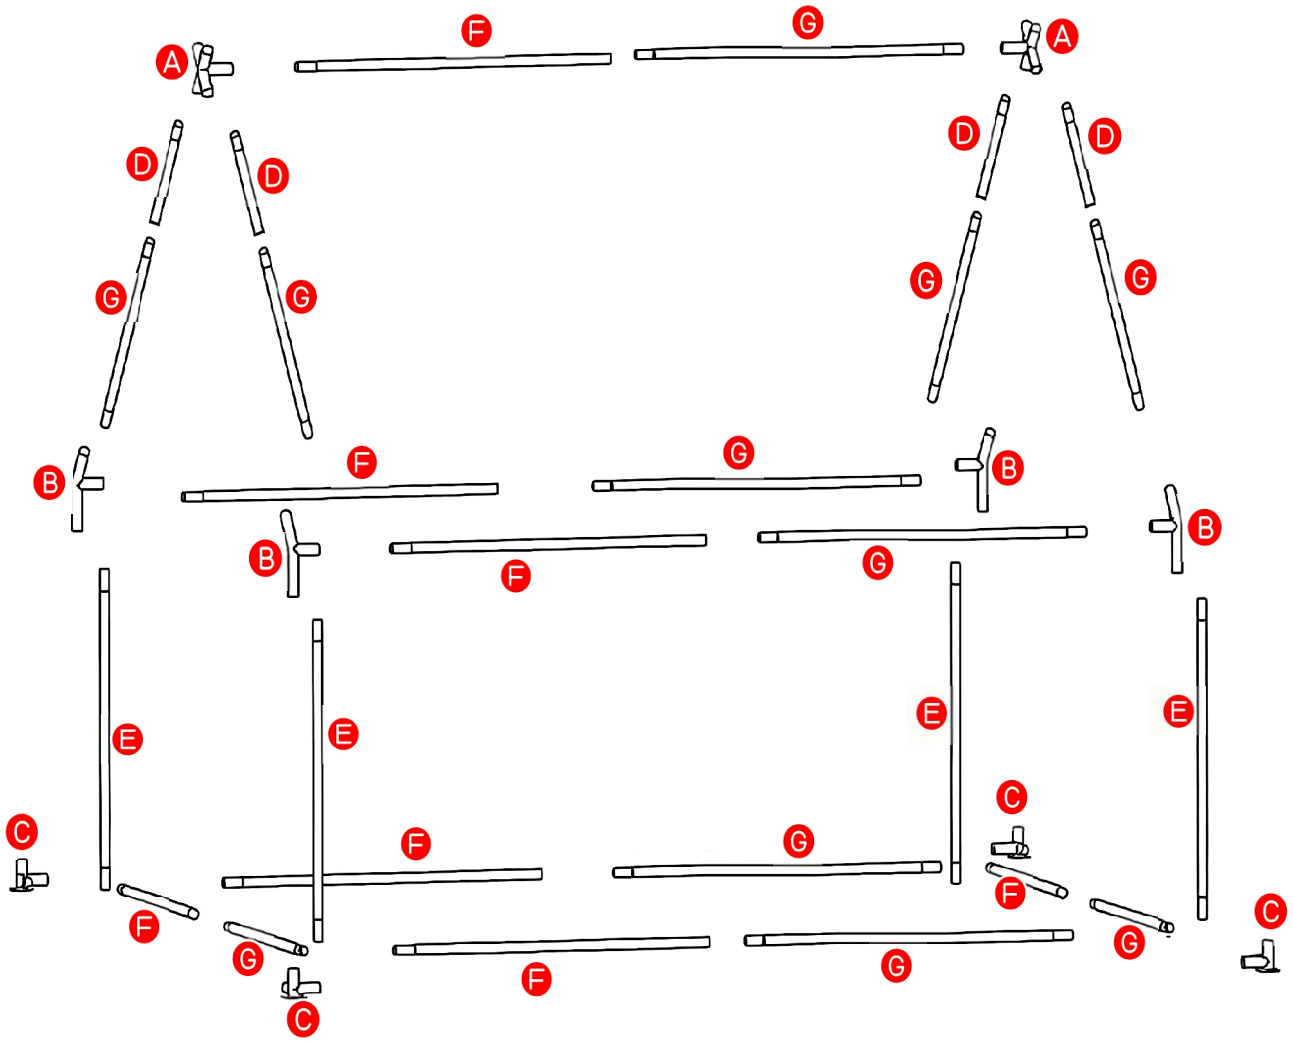

ASSEMBLY STEP 1

MANDATORY: Wear gloves during assembly.

1. Align the two holed legs of the top five-way connector A with the connecting holes at the reduced end of tube D respectively, insert Screw No.1 and fit Nut No.2; then connect the other plain end of tube D to the reduced end of tube G with spring button, insert Screw No.1 and fit Nut No.2.
2. Tighten all nuts with a wrench to lock all joints. Set aside for later assembly.




A (2PCS)



D (4PCS)



G (4PCS)



1 (4PCS)




2 (4PCS)



6 (2PCS)



7 (2PCS)

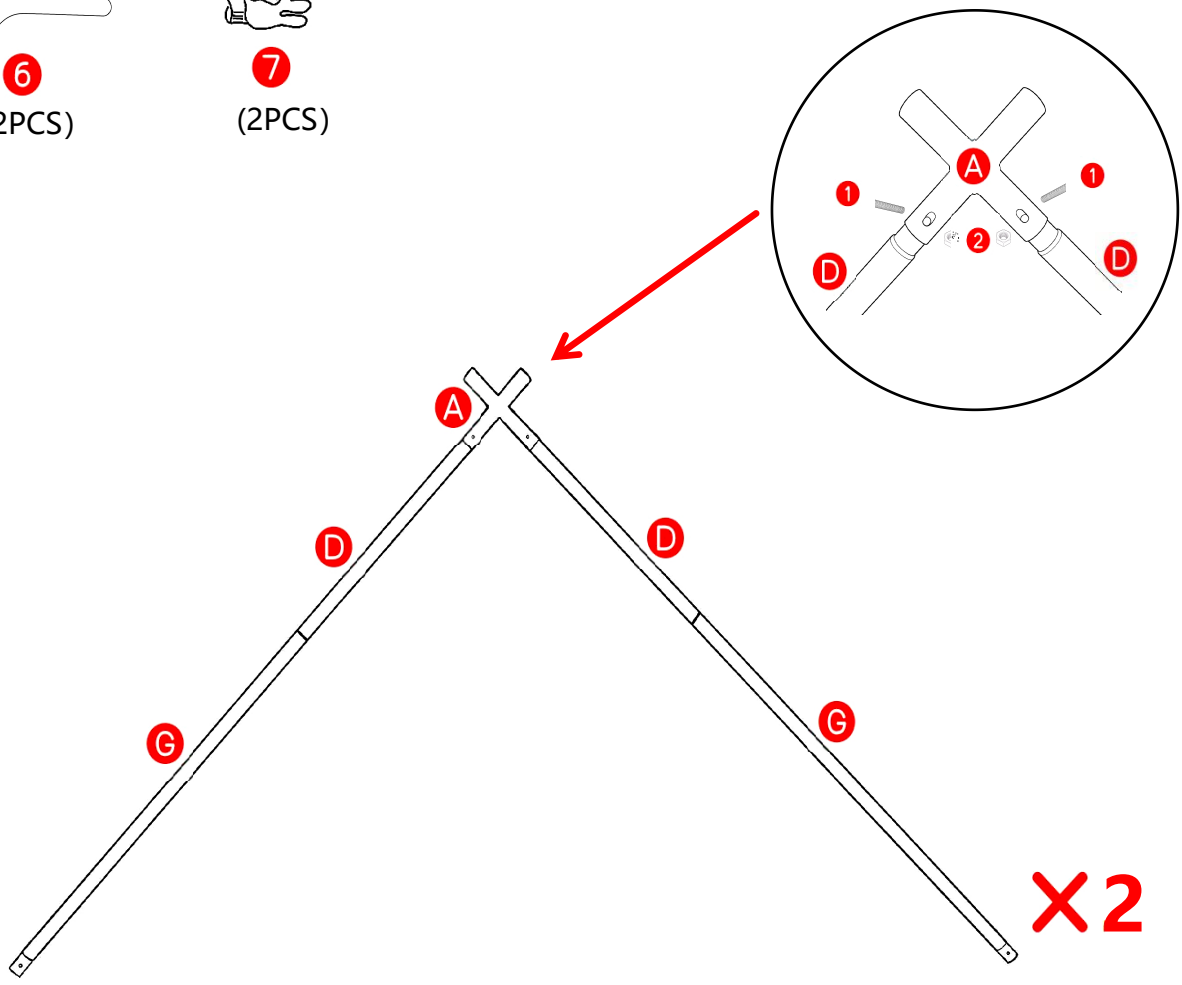


ASSEMBLY STEP ②

MANDATORY: Wear gloves during assembly.


1. Take another tube G, insert its spring- clip end into the plain end of tube F until it snaps into place;

2. Set aside for later assembly.



Ⓕ

(7PCS)




Ⓖ

(7PCS)



❼

(2PCS)

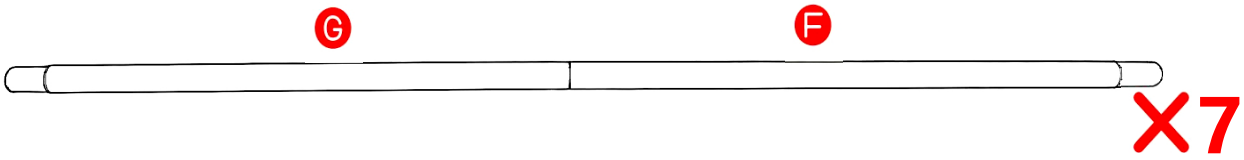

X7

ASSEMBLY STEP 3

MANDATORY: Wear gloves during assembly.


1. Lay the tent tarp on a clean and flat surface. Pass the pre- assembled GF assembly through the top opening of tarp H. Align the holed end of top five- way connector A on the two pre- assembled ADG steel tube assemblies with the connecting holes. Insert screw Part 1 and fit nut Part 2 using wrench Part 6.
2. As shown in the figure, butt- connect the lower ends of tube G of the two ADG assemblies to 3- way connector B respectively, ensuring the middle ports of part B face inward. Align the middle port of 3- way connector B with the mounting hole of the GF tube assembly. Insert screw Part 1 and fit nut Part 2 using wrench Part 6.



B
(4PCS)




H
1PC



1
(10PCS)




2
(10PCS)



6
(2PCS)



7
(2PCS)

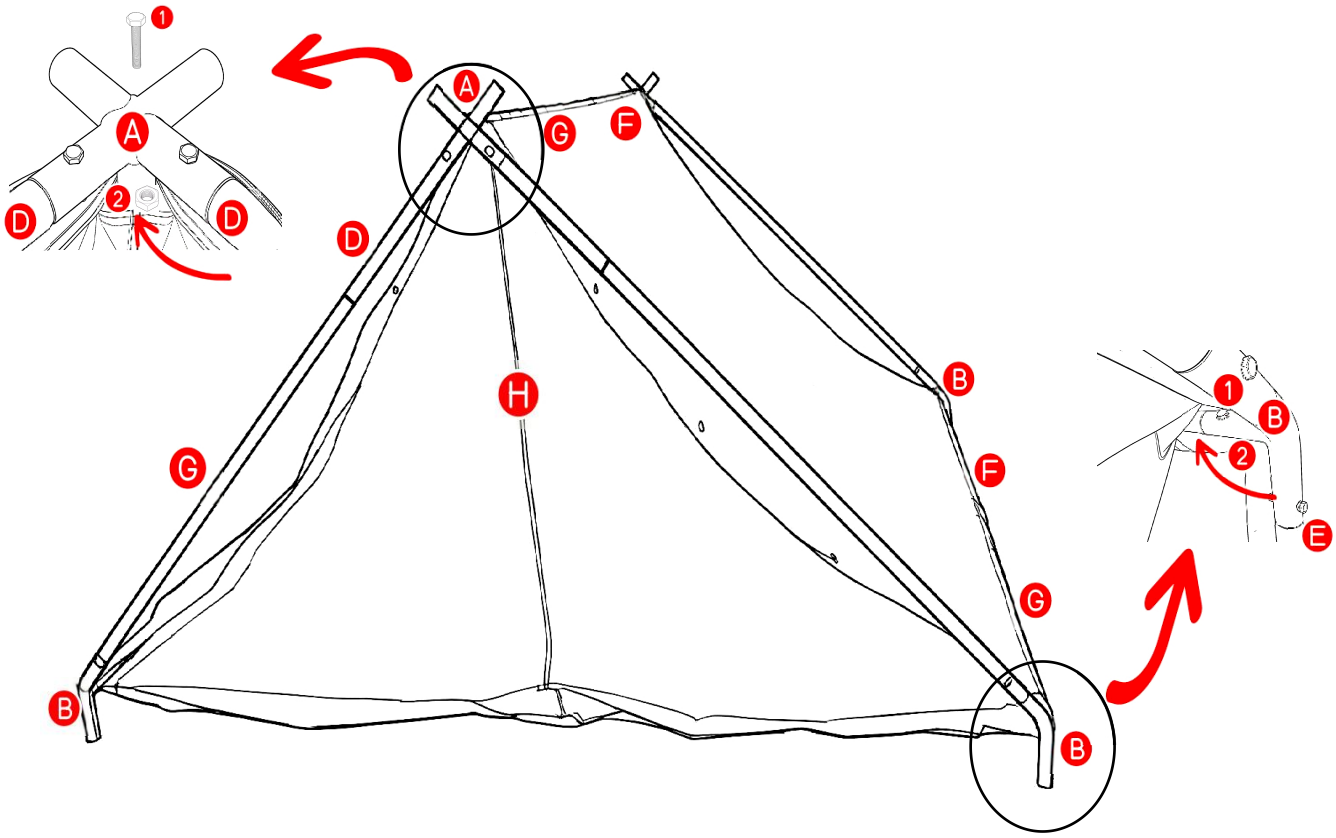

ASSEMBLY STEP 4

MANDATORY: Wear gloves during assembly.

1. Connect the lower port of 3- way connector B to upright tube E. Connect the lower end of upright tube E to base 3- way connector C.
2.Attach the GF tube to the horizontal port of base 3- way connector C. Connect the remaining three pre- assembled GF tube sections to one another horizontally via base 3- way connector C to form the bottom frame.
3. Align the connecting holes, insert screw Part 1, and fit nut Part 2 with wrench Part 6 to secure the frame.




C

(4PCS)



E

(4PCS)



1

(16PCS)




2

(16PCS)




5

(2PCS)



6

(2PCS)

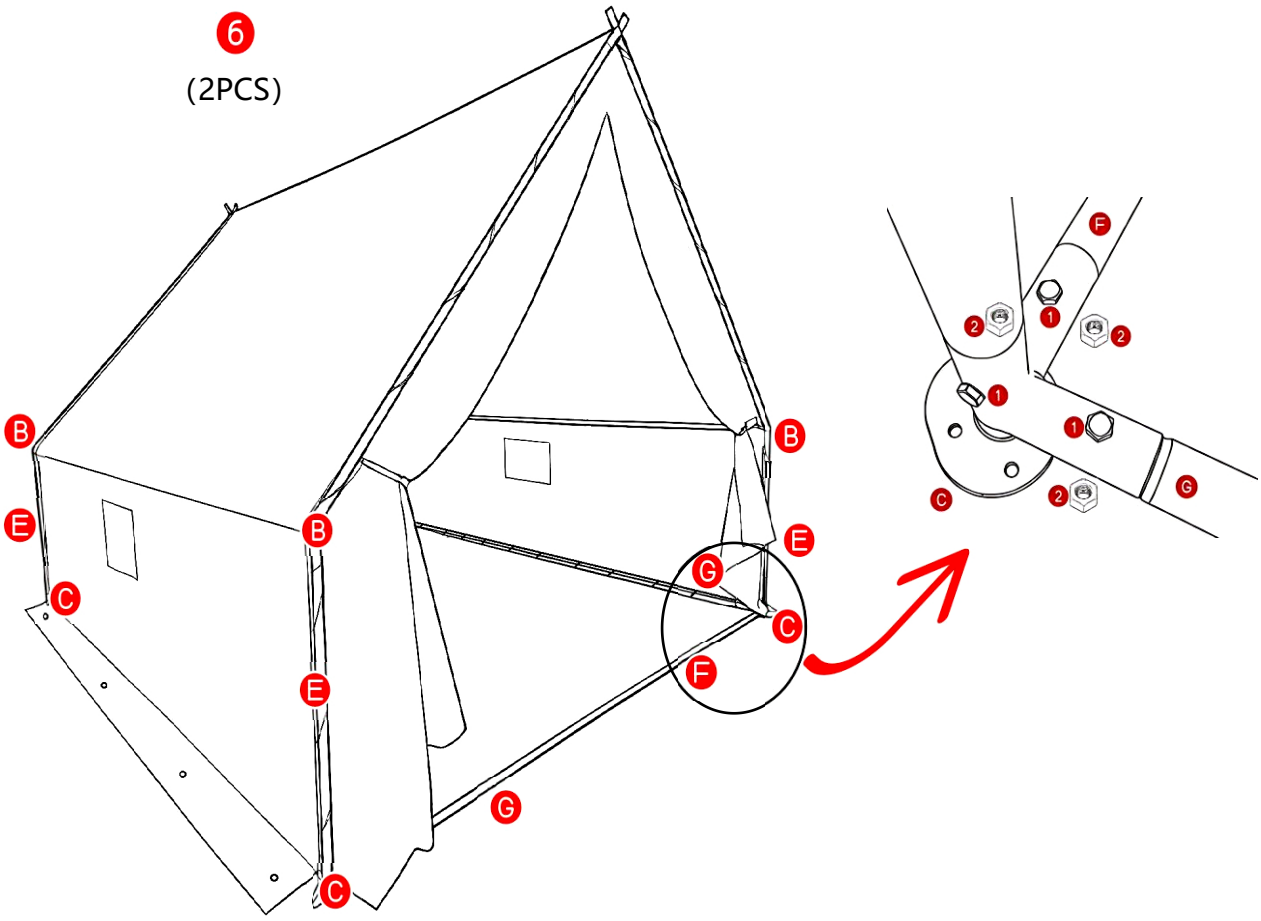

ASSEMBLY STEP 5

MANDATORY: Wear gloves during assembly. Use a ladder for overhead work.

1. Cut rope Part 3 into two equal sections with scissors. Take one section and wrap it circularly following the arrow. Wrap both tent webbing and metal pole together. Keep the rope tight while wrapping, and continue down to bottom position C to firmly secure the tent fabric on the frame.
2. Take the other cut rope section, follow the same circular - wrapping method along the arrow, and wrap down to bottom position C to finish fixation.




3

(1PC)



5

(2PCS)

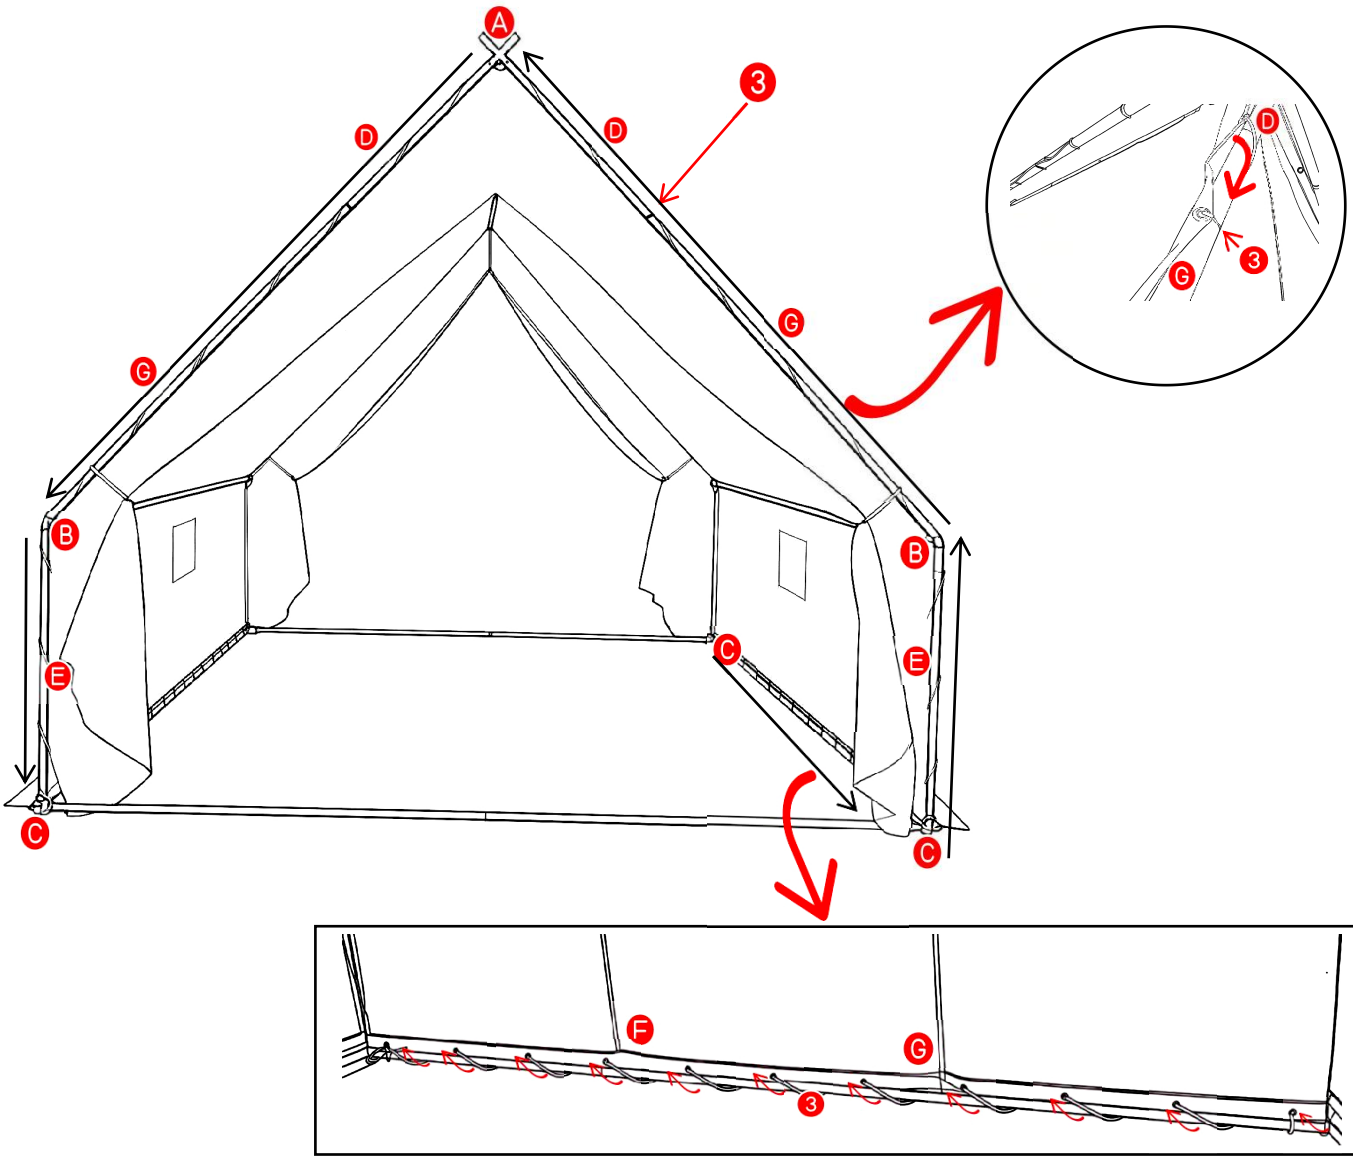

ASSEMBLY STEP 6

MANDATORY: Wear gloves during assembly.

1. Tie four guy ropes Part 4 respectively to each of the four 3- way connectors B and pull them out. Attach L- shaped ground stakes Part 5 to the ends of the guy ropes. Insert the stakes into soft soil and tension the guy ropes to secure the tent.
2. There are 4 eyelets along the bottom edge on each side of the tent. Insert ground stakes Part 5 through the eyelets into soft soil.
3. Open the tent doors as shown in the figure, then gather and secure each door with the fabric straps.




4
(4PCS)




5
(10PCS)



7
(2PCS)

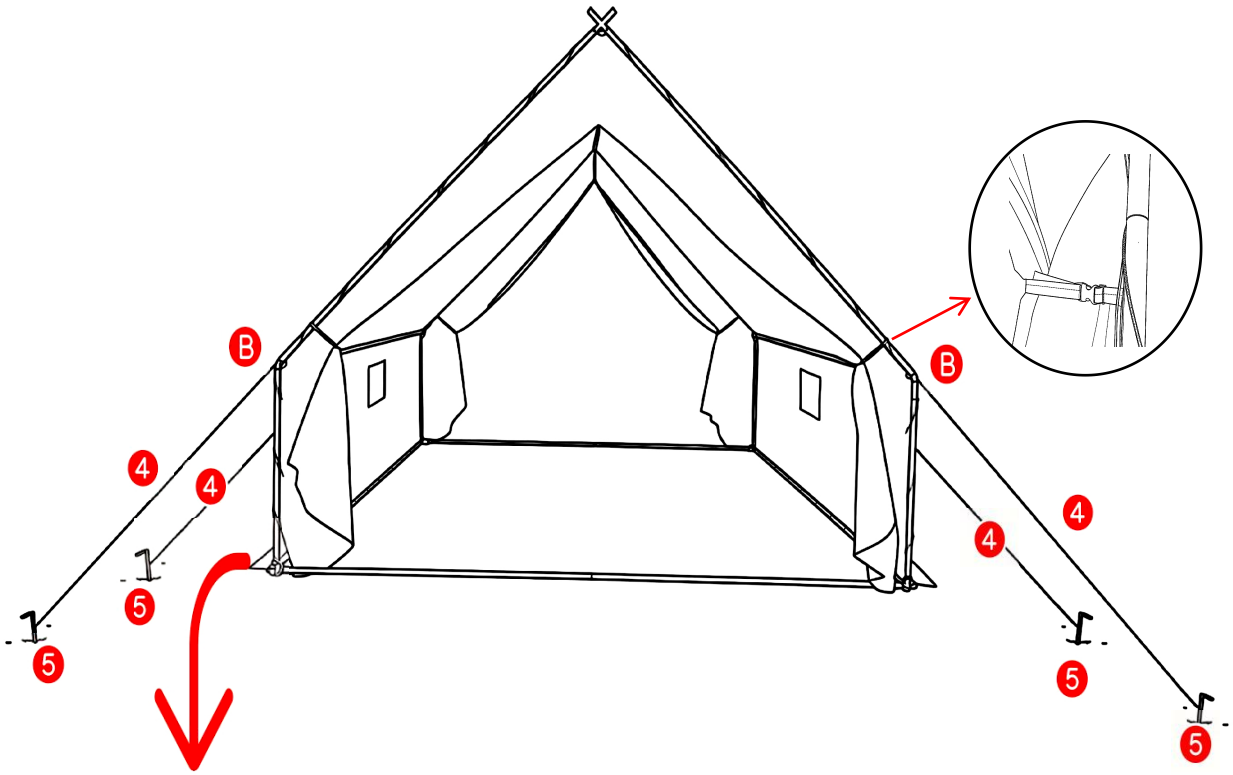

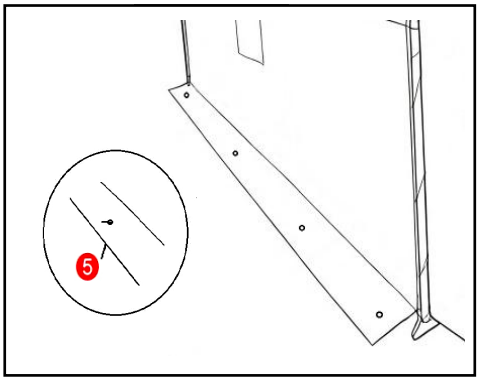

INSTALLATION SUCCESSFUL

