



CAUTION: Read all instructions prior to installation.

Failure to read these instructions prior to installation may result in personal injury, property damage, or product failure. Manufacturer assumes no responsibility for product failure due to improper installation.

• Before Installation

- Make sure you have all necessary parts by checking the diagram and parts list.
- Turn off the hot and cold water supply hose at the angle and turn on the old faucet to release any built up pressure. Remove old faucet.
Clean sink or counter top preparation for new faucet.
- Shut off angle stops valve.
- Pre-drilled hole size requirement: 1.02" (min.)-1.22" (max.)
Max counter top thickness with deck plate: 1.1"


Hole Size:
Φ1.02" (26mm) min
Φ1.22" (31mm) max

Deck Thickness:
1.1" (28mm) max


You may need:




• Installation Steps

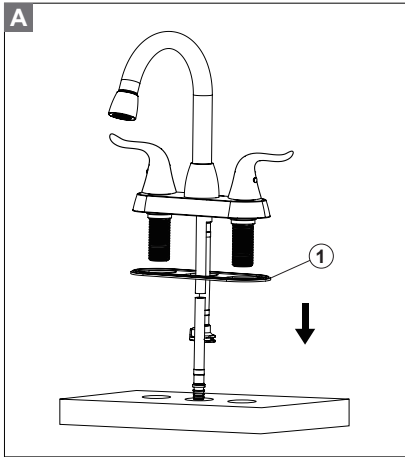


Place plastic gasket ① on bottom of faucet.
Place faucet through mounting holes in sink.

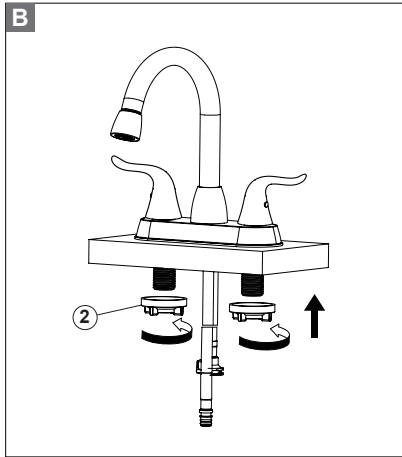


Attach the mounting nuts ② to the hot and cold threaded mounting shanks and tighten faucet to sink.

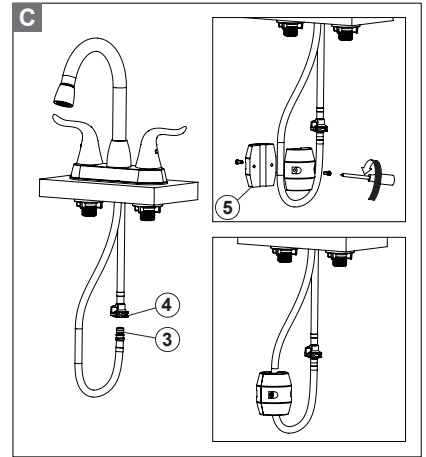


Snap the quick connect hose assembly ③ onto hose ④. Pull down moderately to ensure the connection has been made.
Attach the zinc weight ⑤ to the hose assembly in the approximate area.
(labeled with "Install Weight Here")

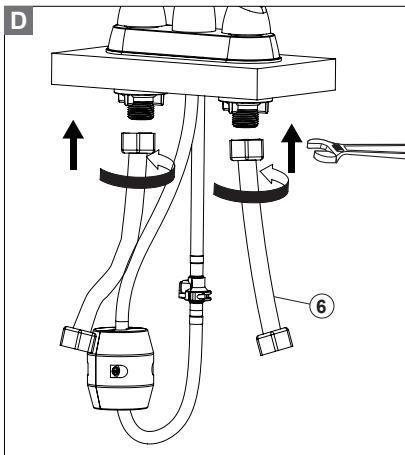

Connect Hot & Cold supply lines ⑥ provided to the faucet and tighten with a wrench.
Do not overtighten.

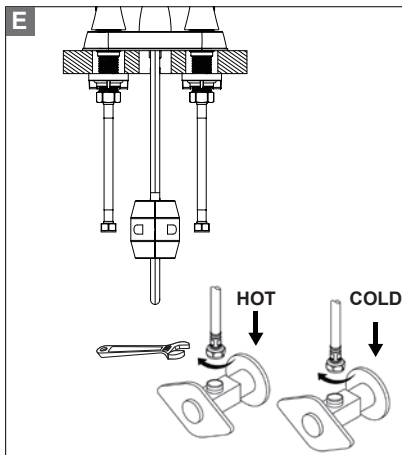

Attach the hot supply on the left side to the hot water shut off valve and tighten with a wrench.
Repeat these steps for the cold side.

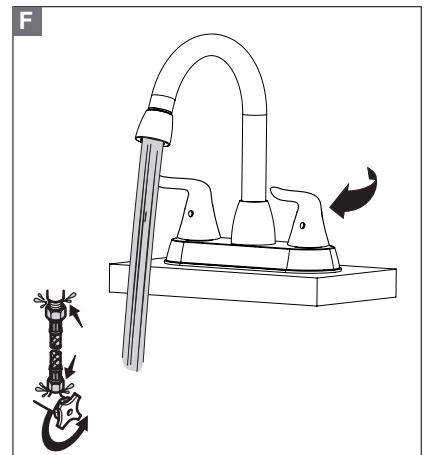


Turn on the water supplies.
Check all connections for leaks.




NOTES:


- Fits for sink WITH overflow hole.
- Clean the sink hole, make sure to remove debris.
- Please avoid using plumber's putty. The seal on top is leak-free. Plumber's putty might cause damage.
- Silicone and plumbing tape can be used for sealing requirement.

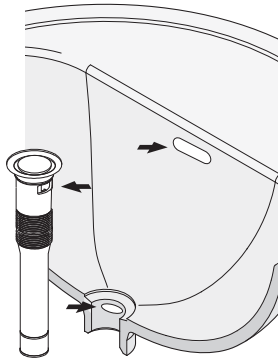


1 Unscrew components A & B to the seal.

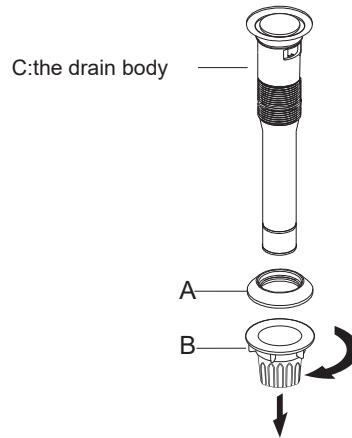


2 Slide the drain body C through the hole in the sink.

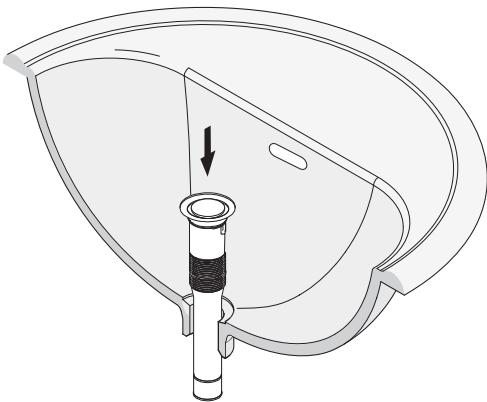

3 Screw components A & B back on as shown.

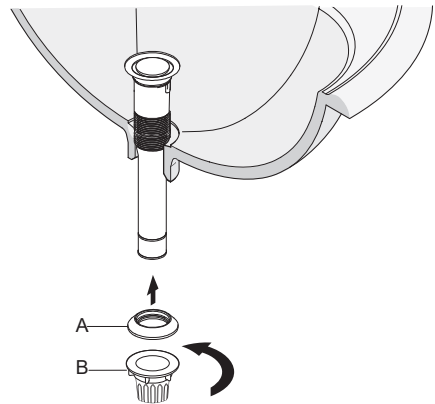

4 Connect the rear end of the drain to the Drain Pipe.

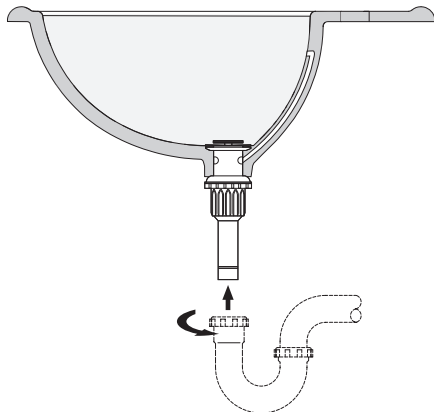

5 Push to activate.

