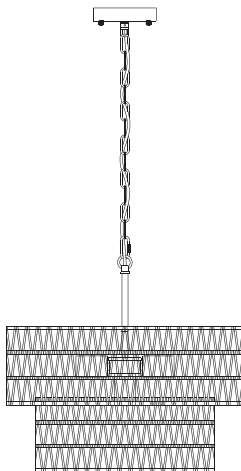


edishinē

Chandelier

SKU: HHPL25A
[Instruction Manual]



Please pay attention to the warning signs
Read the instructions with caution before operating
and keep it properly

V50716

Warning:

Risk of fire. Min 167°F/75°C supply conductors. Consult a qualified electrician to ensure correct installation. Before installation, please turn off the main power of the circuit breaker to prevent possible electric shock.

Installation Instructions

FIG.1. Turn the wall switch to the "OFF" position. Depending on which type of fuse box in your home:

FIG.2. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or turn off the individual switch that supplies power to where the fixture will be installed.

OR

FIG.3. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or unscrew the fuse that supplies power to where the fixture will be installed.




FIG.1 WALL SWITCH




FIG.2 BREAKER PANEL


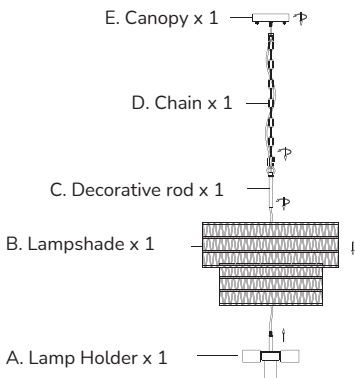







FIG.3 FUSE BOX

PACKING LIST




1. Pass the power cord of the Lamp Holder (A) through Lampshade (B) and Decorative rod (C) as shown in the picture and tighten it.
2. Loosen the activity clip of Chain (D), hook it onto Decorative rod (C), and then tighten the activity clip.
3. Pass the wires through Chain (D) and Canopy (E) and tighten it.

INSTALLATION KIT

AA  Mounting Bracket x 1	BB  Wire Nut	CC  Outlet Box Screw
DD  Ground Screw	EE  Knurled Nut	

1. Ground Screw (DD), Knurled Nut (EE) have been pre-installed on Mounting Bracket (AA).

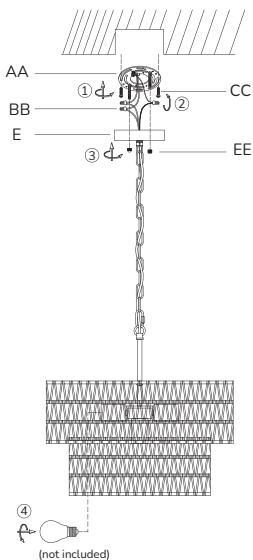INSTALLATION



Step 1.

1. Loosen the Knurled Nut (EE) from Canopy (E), and take out the Mounting Bracket (AA).
2. Take off the screws from the outlet box, and secure the Mounting Bracket (AA) onto the box with the screws taken off or Outlet Box Screw (BB).

Step 2.

1. Wrap the ground wire from the outlet box around the Ground Screw (DD) on the Mounting Bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.
2. Connect the wires from the fixture to the house supply wires, neutral wire (white) to neutral wire, and hot wire (black) to hot wire.
3. Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other side.

Step 3.

1. Fix the Canopy (E) onto the Mounting Bracket (AA) with the Knurled Nut (EE).

Step 4.

1. Install the E26 x4 bulbs (not included).

Specifications

- Input Voltage: 120VAC 60Hz
- Max.Load Power: incandescent Bulb 60W
- Socket Type: Standard Medium E26

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date. Please note that the warranty does not cover damage caused by personal misuse or improper installation. Please attach your Order ID and Name so that our dedicated customer service team can help you better.



Made in China