




Air Gap Installation Instructions

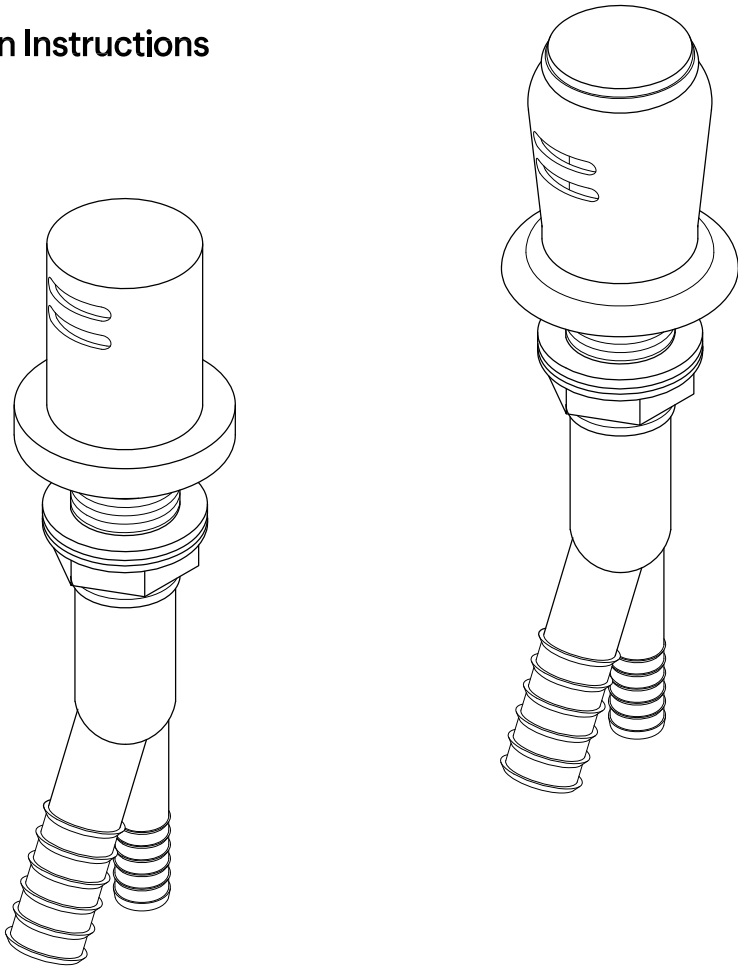

www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710

NOTICE

Failure to follow all directions may cause leaks
which may result in water damage


⚠ DANGER

Hazardous voltage (120v).
Contact may cause electrical shock and injury.
Disconnect power before servicing
This equipment is to be serviced by trained
personnel only

Tools Required




Hose Clamp




Screwdriver


Installation Steps:

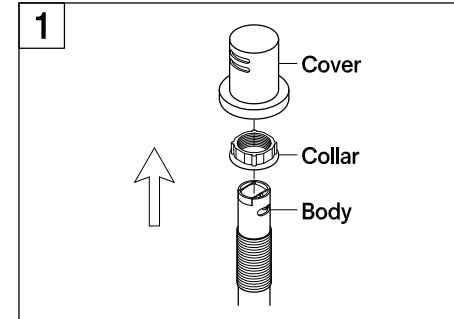


1. Remove cover and collar from body.

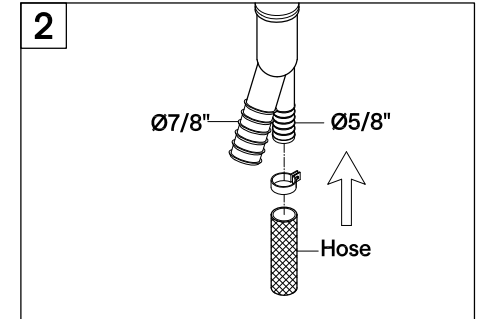


2. Attach 5/8" dishwasher drain hose to 5/8" leg. Secure with hose clamp.

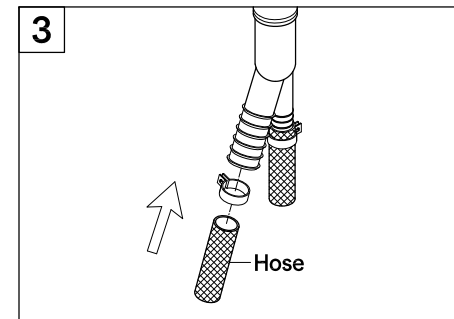


3. Attach 7/8" garbage disposal hose or side inlet sink trap drain hose to 7/8" leg. Secure with hose clamp.

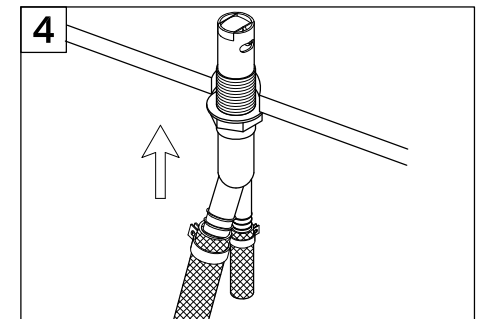

4. Air gap should appear above sink rim surface.
Push body through mounting hole.

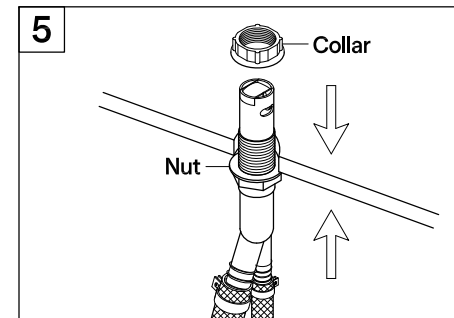

5. Tighten the nut and collar.

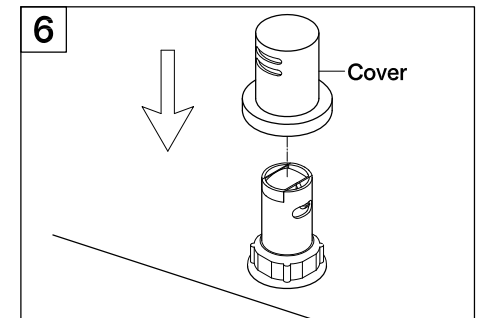

6. Place cover over the body collar.