


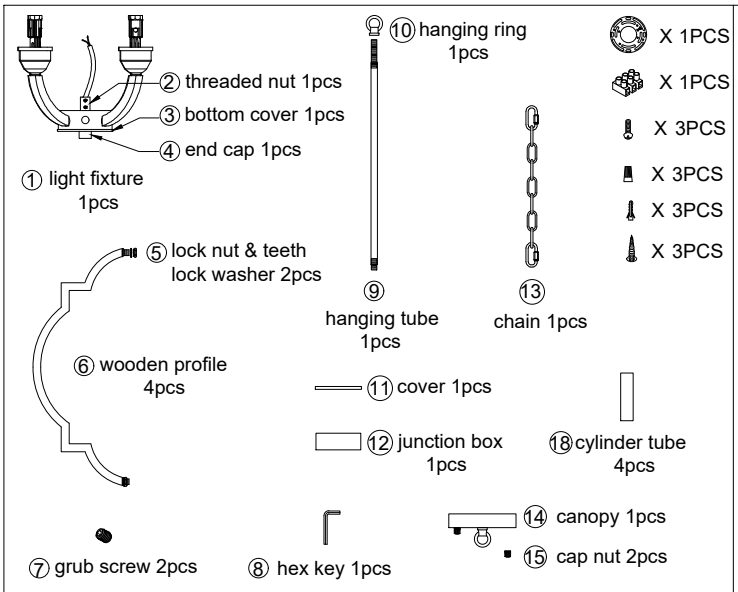


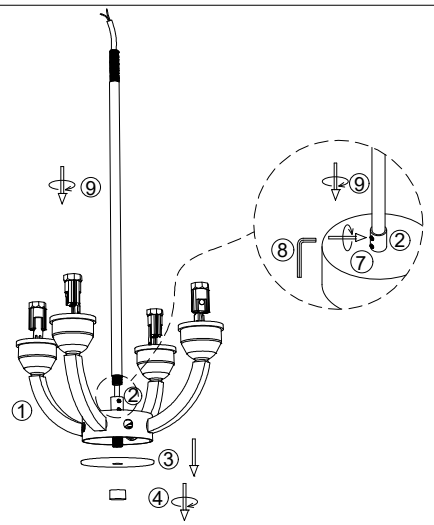


1.Let the wire of fixture ① go through the hanging tube ⑨, rotate to install the tube ⑨ to the fixture, fix it with grub screw ⑦ by hex key ⑧, loosen end cap ④ to remove out the bottom cover ③.

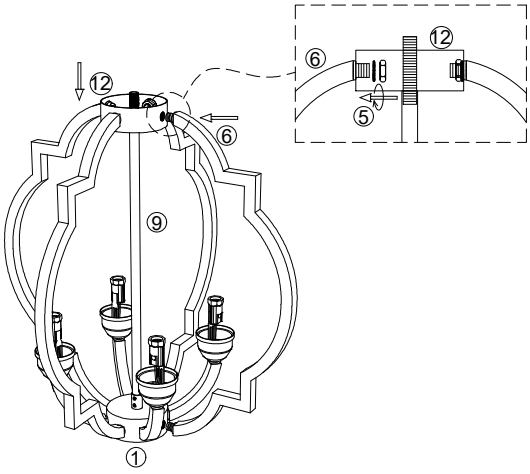


2.Install the junction box ⑫ on the tube ⑨, after that install the profile ⑥ to the bottom box and junction box ⑫ with lock nut and teeth lock washer ⑤, please don't tighten the nuts ⑤ until all profiles installed to the fixture.

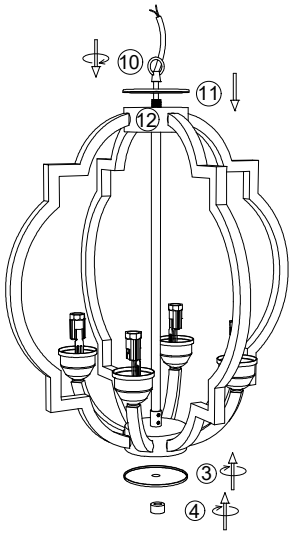

3.Close the bottom cover ③ with end cap ④, let the wire go through the cover ⑪ and ring ⑩, rotate the ring ⑩ to close the cover ⑪ to the junction box ⑫.

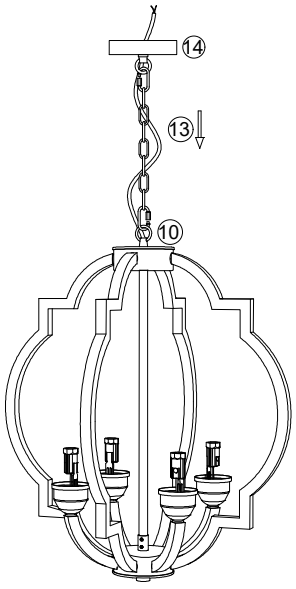

4.Hang the fixture to the canopy ⑭ with chain ⑬, let the wire go through the chain ⑬ and canopy ⑭.

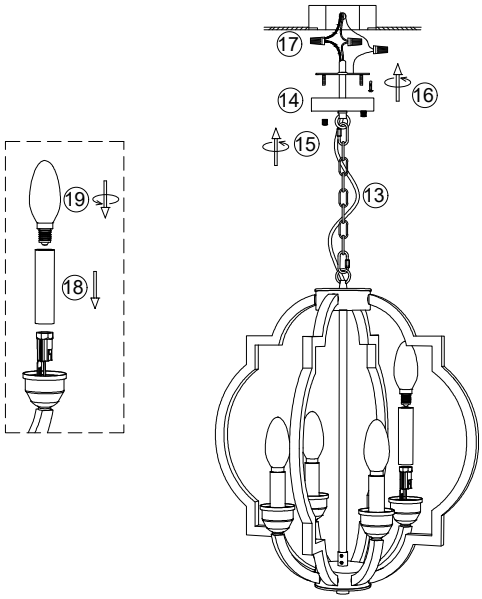

5.Install the bracket to the ceiling junction box with screw ⑯.
6.Connect the wire to your home line with cap connector ⑰.
7.Install the fixture to the bracket with cap nut ⑮.
8.Put the cylinder tube ⑱ on the bulb holder and install the bulb ⑲.

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !