


Installation & Assembly

To avoid scratches and swallowing parts, please do not install by children!

Hardware List		Hardware List	
	1		1
	1		1
	1		2
	1		1
	4		4
	1		Connecting buckle x1 8x20mm screws x2


1 Cover the hole with a cover plate.

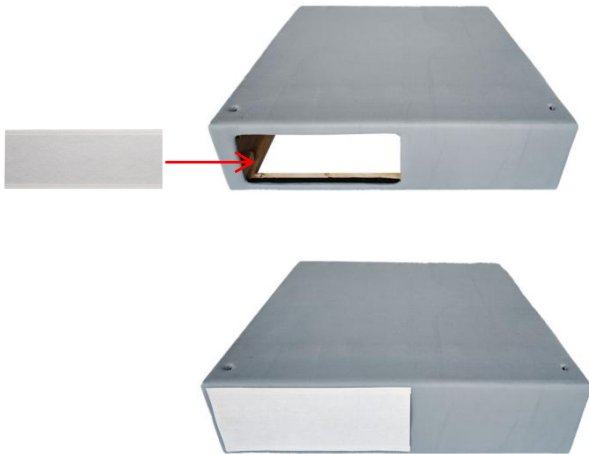


2 Seal the bottom with the base cloth. And then screw the sofa Legs into the reserving holes on the seat.



3 As shown in the figure: Insert the rod into the corresponding positions of the backrest and armrest.

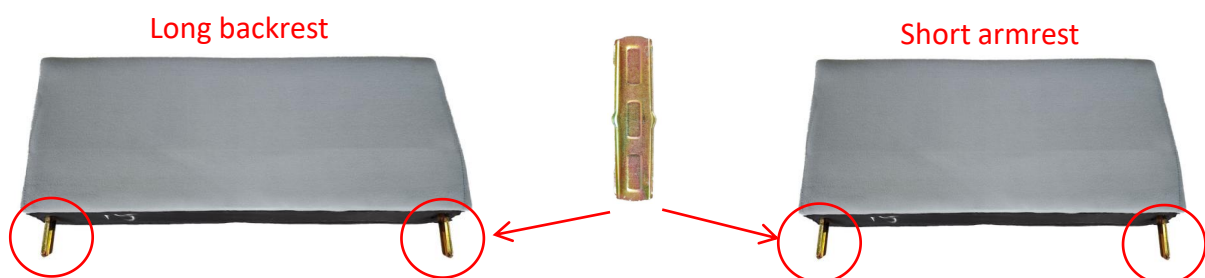

4

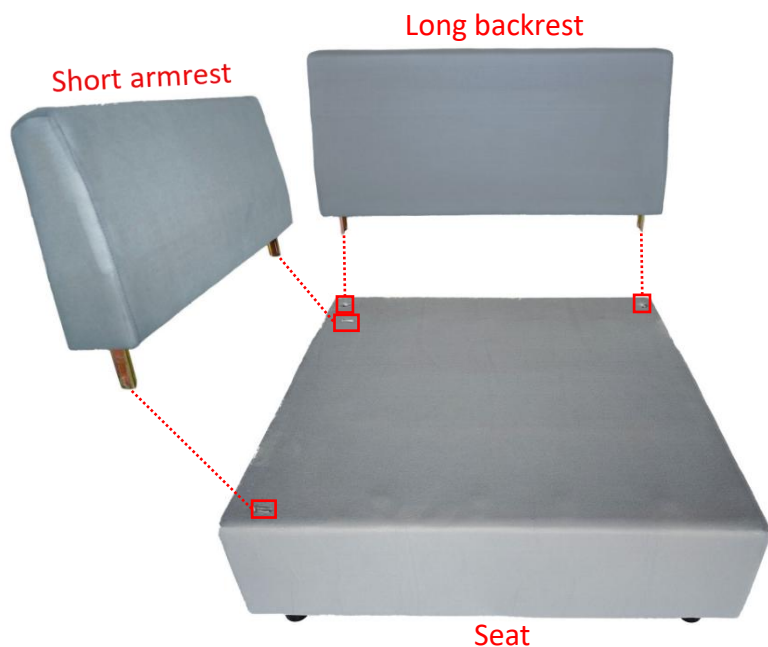


Please note that you need to install the backrest first. Insert the backrest first. Make sure the flat side is level with the side edge of the seat frame, and the curved side faces inward.



5

Put on the sofa cover.


Suggestion: you'd better not remove the protective strip before finish putting the cover on.

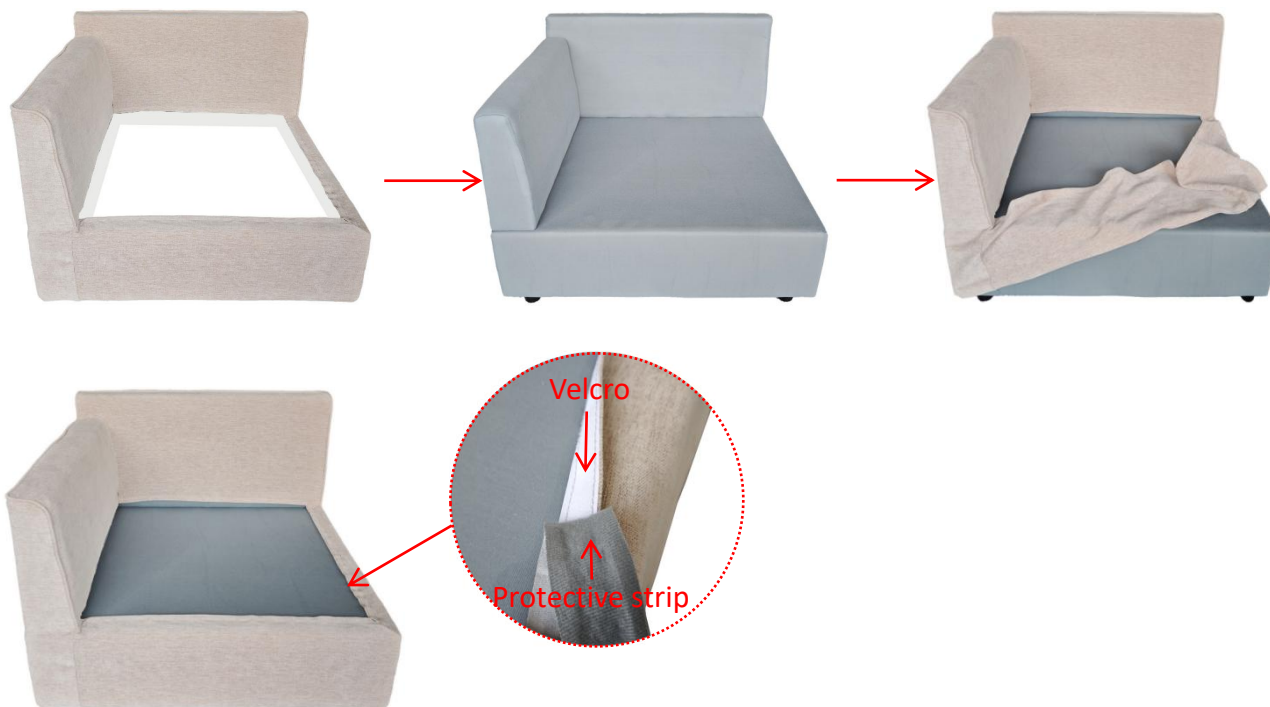

6

Place the seat cushion and back cushion.

The seat cushion can be attached using Velcro.

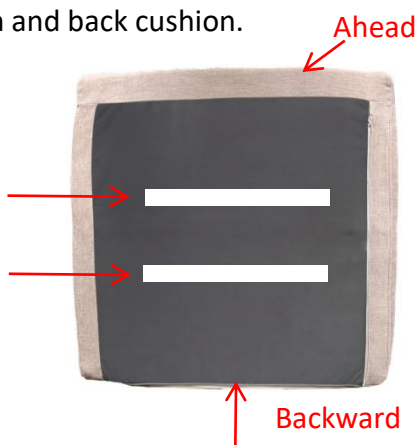

Note: The side of the grey magic cloth that is flush with the edge of the seat cushion should be facing backward.



7 Apply the connection buckles to connect the seats together(or not, it's totally up to users).

