
MAHOGANY DBL-DOOR CURIO **Assembly Instruction**

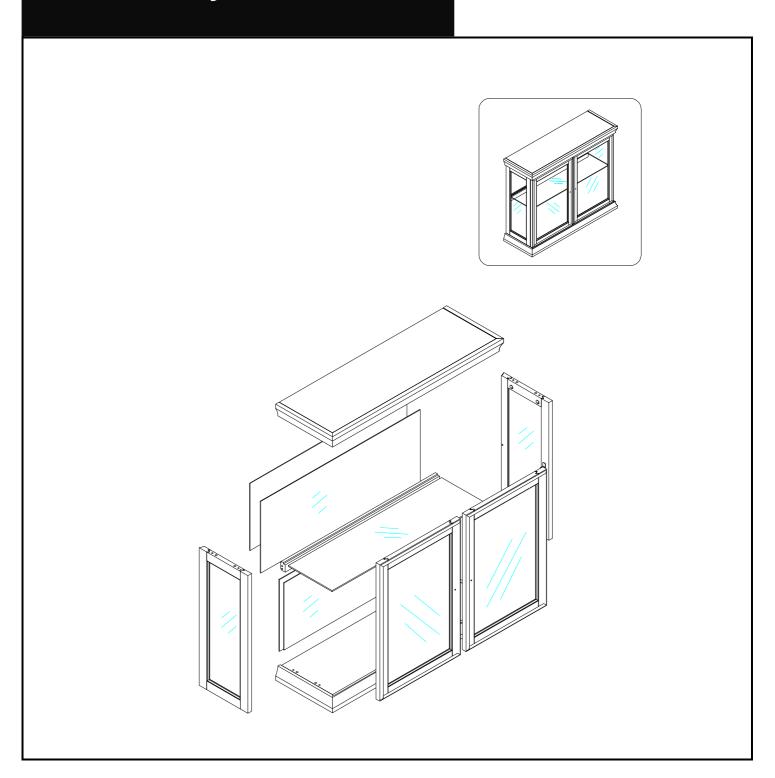

HARDWARE LIST

Please review all parts and hardware before disposing of any packaging.

Call Customer Service if missing hardware. Do not return to store/retailer.

Using a screw that is too long will cause damage. Before beginning assembly, separate each type of screw. Carefully study the screw diagrams below. You may receive extra hardware with your unit.

Α	В	С
CAM BOLT X 6PCS	WOOD DOWEL X 10PCS	CAM LOCK X 6PCS
D CAM NUT X 4PCS	E HEXAGONAL BOLT X 4PCS	F METAL SHELF BRACKET X 2PCS
G FLAT HEAD LONG SCREW X18 PCS	H ROUND HEAD SCREW X 29PCS	THE SLICE OF IRON X 5PCS
J		L
HANDLE X 1PC	LONG BOLT X2PCS	MAGNETC CATCH X 1PC
MACNET VADOS	N:	O CO
MAGNET X2PCS P	HINGE X 4PCS Q	KNOB X 2PCS
SP WASHER X 4PCS	EVEN WASHER X 4PCS	


Parts List

Please review all parts and hardware before disposing of any packaging.

Call Customer Service if missing hardware. Do not return to store/retailer.

Using a screw that is too long will cause damage. Before beginning assembly, separate each type of screw. Carefully study the screw diagrams below.

You may receive extra hardware with your unit.

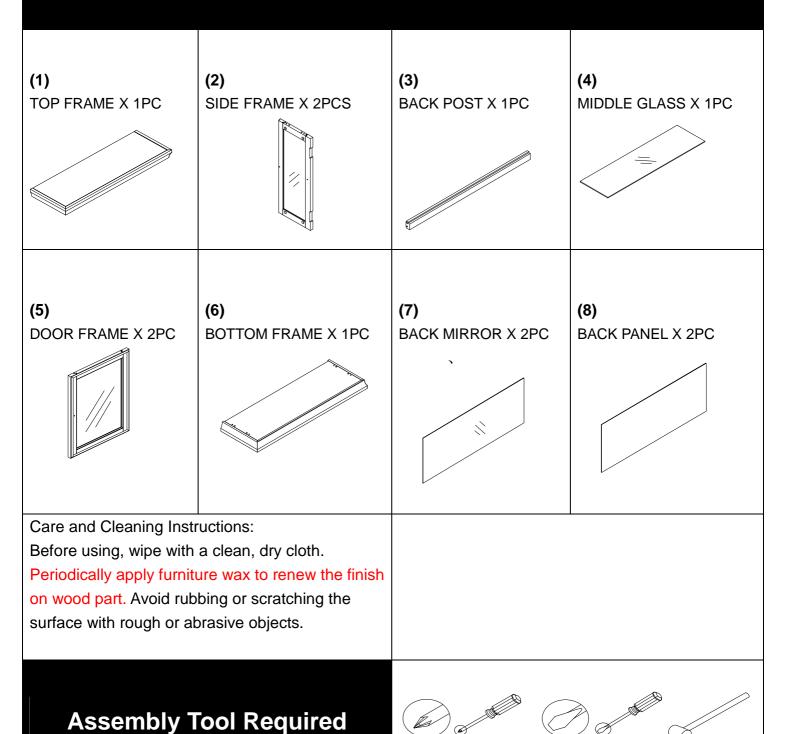

1"+" Screw driver

"-" Screw driver

Rubber Mallet

HIDDEN CONNECTOR ASSEMBLY TECHNIQUES FOR LOCK NUT & LOCK PIN

1 SET INCLUDES: (C) CAM-LOCK 1PC. (A) CAM BOLT 1PC.

TOOL NEEDED: "+"SCREW DRIVER


STEP 1: SCREW CAM BOLT(A) ONTO PRE-SET PLASTIC NUT ON PANEL.USE A "+" SCREW-DRIVER FOR TIGHTENING. ATTENTION: DO NOT OVERTIGHTEN THE CAM BOLT(A)

STEP 2:ATTACH BOTH PANELS, MAKE SURE YOU HAVE INSERTED THE CAM BOLT TO THE VERY DEPTH OF THE HOLE WITH RUBBER MALLET GENTLY. CAUTION: DO NOT USE HAMMER. THEN INSERT CAM-LOCK(C) INTO PRE-DRILLED HOLE ON PANEL.

MAKE SURE THE ARROW ON CAM-LOCK(C) SET IN PANEL POINT TOWARD THE HOLE INTO WHICH THE CAM BOLT(A) HAS BEEN INSERTED AND INSERTED THE CAM-LOCK(C) TO THE VERY DEPTH OF THE HOLE.


STEP 3:ROTATE THE CAM-LOCK(C) CLOCK WISE TO SECURE CAM-BOLT(A) TIGHTEN BY A "+" SCREWDRIVER

DETAIL STEP PLEASE SEE THE BELOW PICTURE.

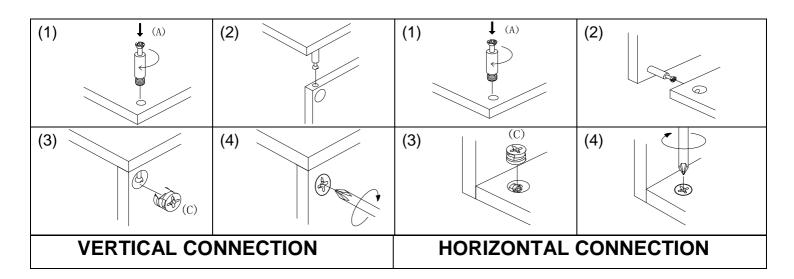

WOODEN DOWEL INSTALLATION PROCEDURE

(1)GENTLY TAP DOWEL INTO HOLE
WITH RUBBER MALLET OR USE HAND
PRESS IN.
DO NOT USE HAMMER



Assembly Instructions


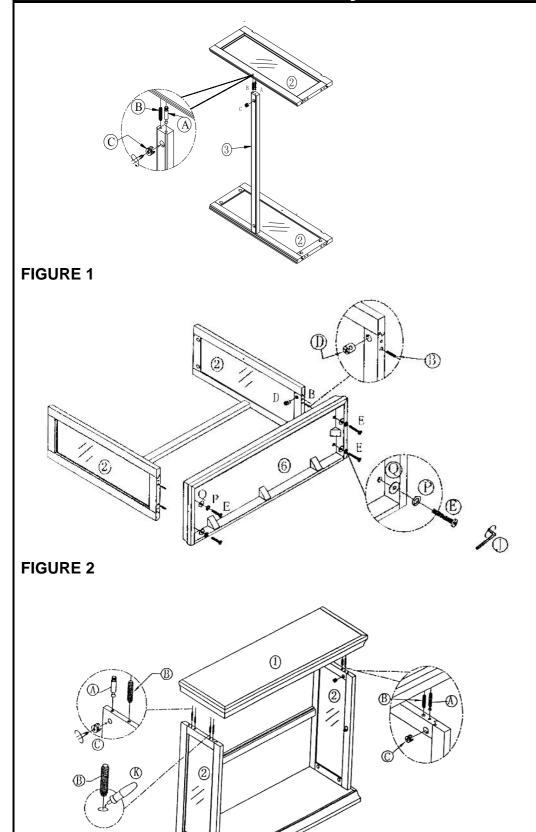



FIGURE 3


Step 1 : Affix side frame (2) to Back post (3) with wood dowel(B),cam bolt (A) and cam lock (c). (Please read the "BEFORE ASSEMBLY" part at the beginning of the instructions first and follow it in the FIGURE 1).

Step 2: See
FIGURE2 ,Fix Bottom
frame (6) to the
assembled unit with
(B) and(D), as noted in
BEFORE ASSEMBLY,
then insert (E) into the
pre-drilled holes of
Bottom frame (6)with
(P)and (Q),then tighten
it clockwise with (J)

Step 3: Fit Top frame (1) and the unit Assembled in FIGURE 2 together with (A), (B) and (C).

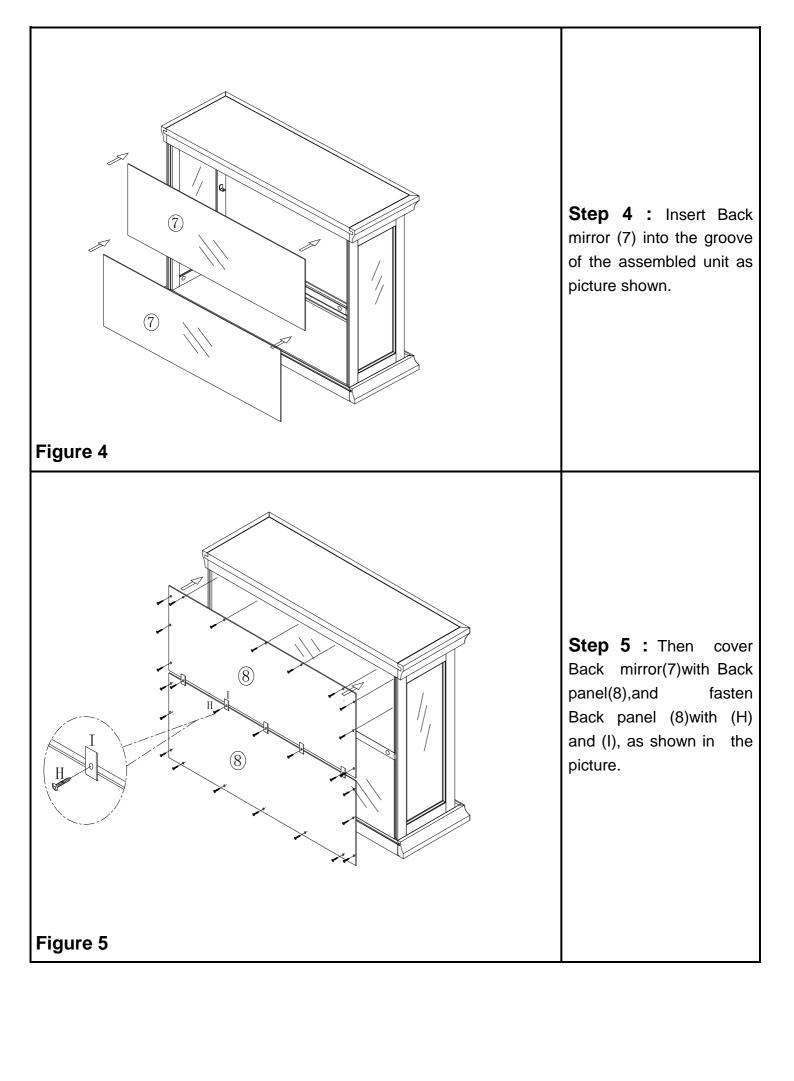

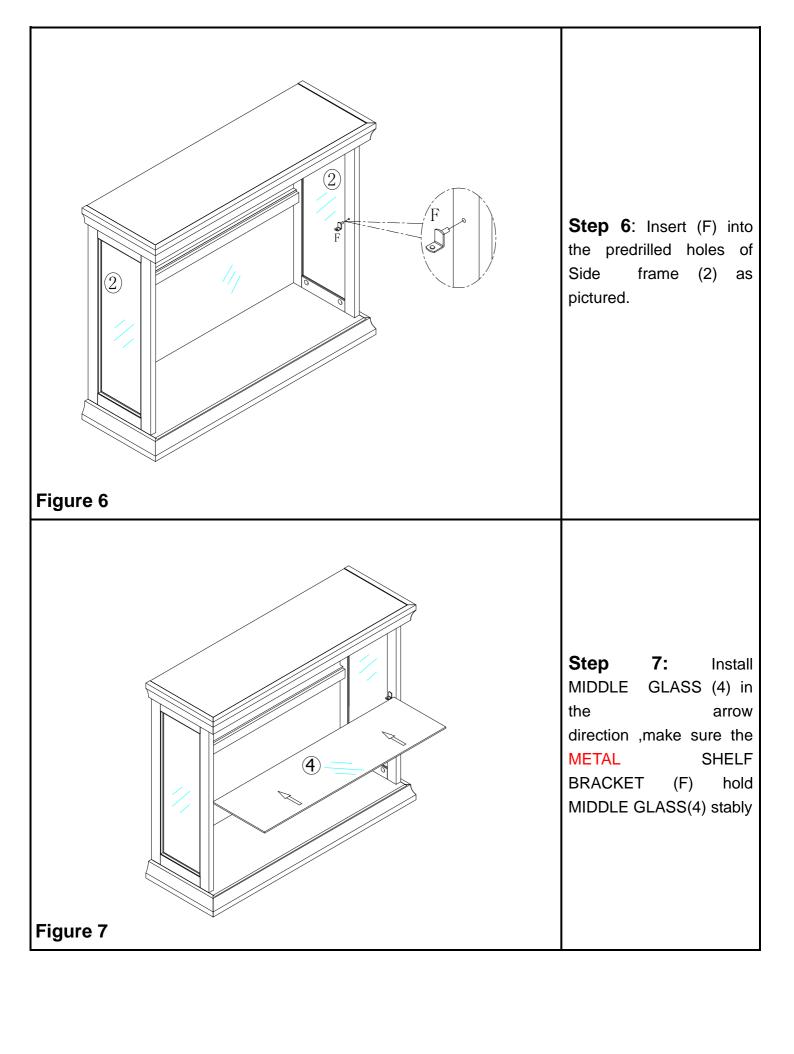

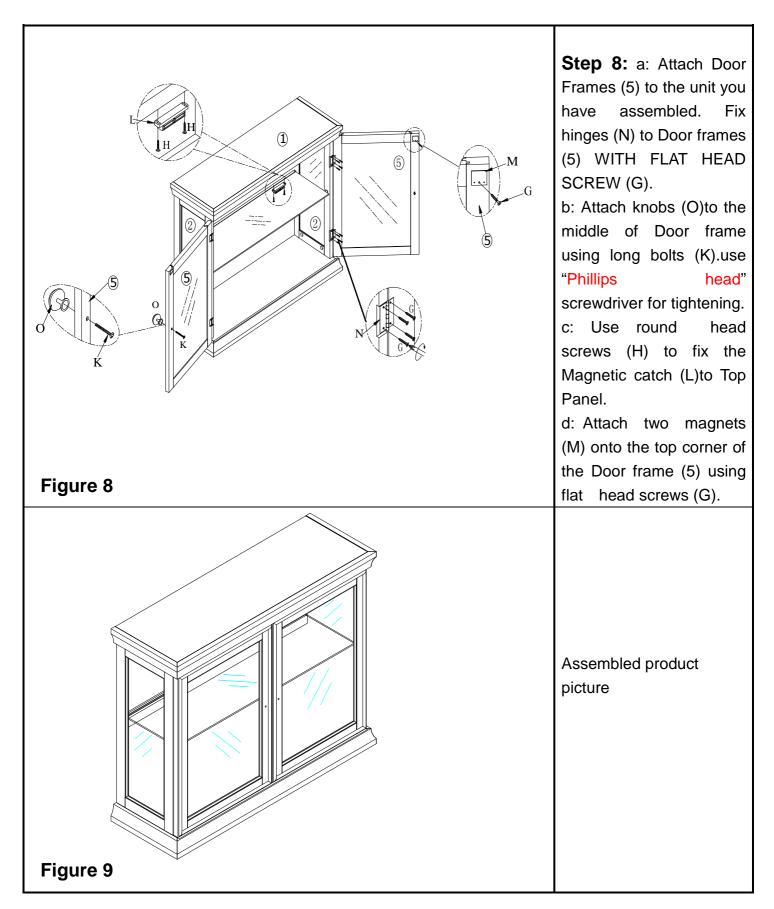

Warning: Max top load 50 lb. Max weight on glass shelf 10 lb.

"PARTS WILL BE SENT IF AVAILABLE" "THIS IS NOT A WARRANTY"

Customer Information

Name

Address

City/State/Zip Code

Phone Number

Please indicate where you purchased this item: Store/ Website/ Catalog

Please indicate color/size/style number:

Style No Parts Letter Parts Description Quantity Needed

Please count, identity and compare parts and hardware list to be sure all parts are present.