



Bria™ 6734 Freestanding Experience Bathtub

Letter	Description	Whirlpool	Pure Air®
-	Drain Location	Universal	
-	Equipment Location	Opposite of Drian	
-	Cutout Template	RA17000	
-	Drop-In Cutout Dimensions (L x W)	--	
-	Total Weight	863 lbs (391 kg)	860 lbs (390 kg)
-	Floor Loading	55 lb/ft² (269 kg/m²)	55 lb/ft² (269 kg/m²)
-	Operating Gallons (Min./Max.)	47/60 Gal (178/227 L)	60 Gal (227 L)
-	Product Weight	115 lbs (52 kg)	112 lbs (51 kg)
-	Soaking Depth	15.6" (396 mm)	
L	Outer Length	67" (1702 mm)	
W	Outer Width	33.5" (851 mm)	
H	Overall Height	22.7" / 28.3" (577 mm / 719 mm)	
A	Overflow Height	16" (406 mm)	
B	Long Edge to Drain Center	13.5" (343 mm)	
C	Short Edge to Drain Center	16.7" (424 mm)	
D	Drain Shoe Length	--	
E	Flange Height	--	
F	Deck Width*	5.5" (140 mm)	
G	Service Access Dimensions	No Service Access	
I	Floor Cutout for Drain	4" x 4" (102 mm x 102 mm)	
J	Interior Dimensions Bottom of Bath (L x W)	43.8" x 21.5" (1113 mm x 546 mm)	
K	Interior Dimensions Top of Bath (L x W)	60.1" x 30.7" (1527 mm x 780 mm)	
L2	Interior Depth - Drain End	17.9" (455 mm)	
M	Backrest Angle	18.8°	
N	Footprint (L x W)	56.8" x 28.1" (1443 mm x 714 mm)	

NOTE

The overall dimensions are nominal with a tolerance of +0 and -.25" (6 mm).


Electrical Specification (requires a separate, dedicated GFCI protected circuit):

Model with Components	GFCI (60Hz)
Whirlpool	Motor/Pump 120V 20A
Pure Air®	Motor/Pump 120V 15A

KEY DIMENSIONS

*Deck width reflects only area indicated on detail.

NOTE: Drawing not to scale
Pure Air® model shown

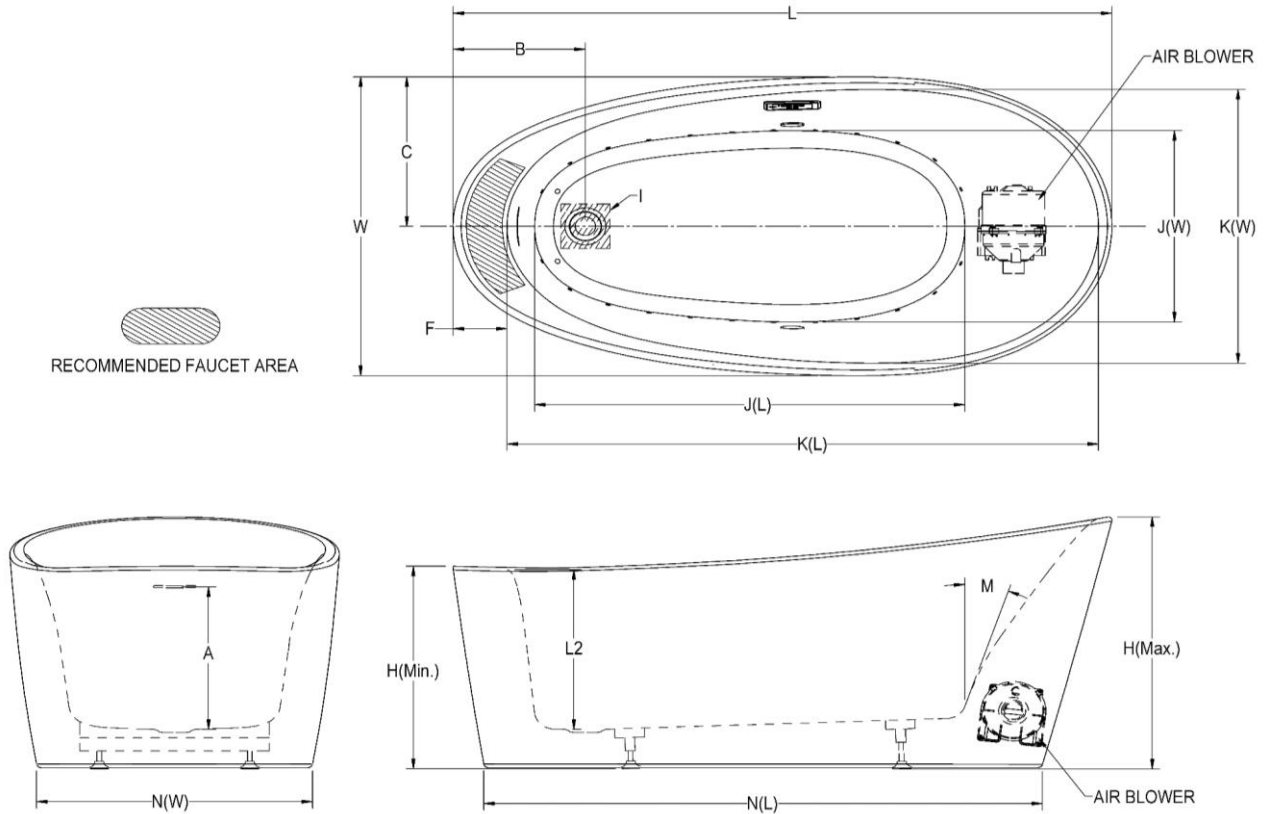

©2025 Jacuzzi Luxury Bath • For additional information, call Customer Service 800-288-4002 • www.jacuzzi.com/baths
Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.
PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE