

NOTE:

This brochure contains IMPORTANT safty info. Please read and keep for future reference.




MAINTAINANCE AND WARNING

- 1.Keep furniture away from heat sources.
- 2.Do not clean furniture with harsh cleaner or polishes.Do not use detergents,solvents,abrasives,spray packs or leather cleaner. Use non-color mild soa with warm water to clean spills(Mix 1:10 soap to water).
- 3.Do not place furniture under direct sunlight, material will possibly fade over time.
- 4.Do not use on site dry cleaning machine.Children should not climb or jump on the furniture.
- 5.Do not write on furniture that is not protected by a padded barrier.
- 6.Not for commercial use, only for residential use.





EXPLOSIVE VIEW

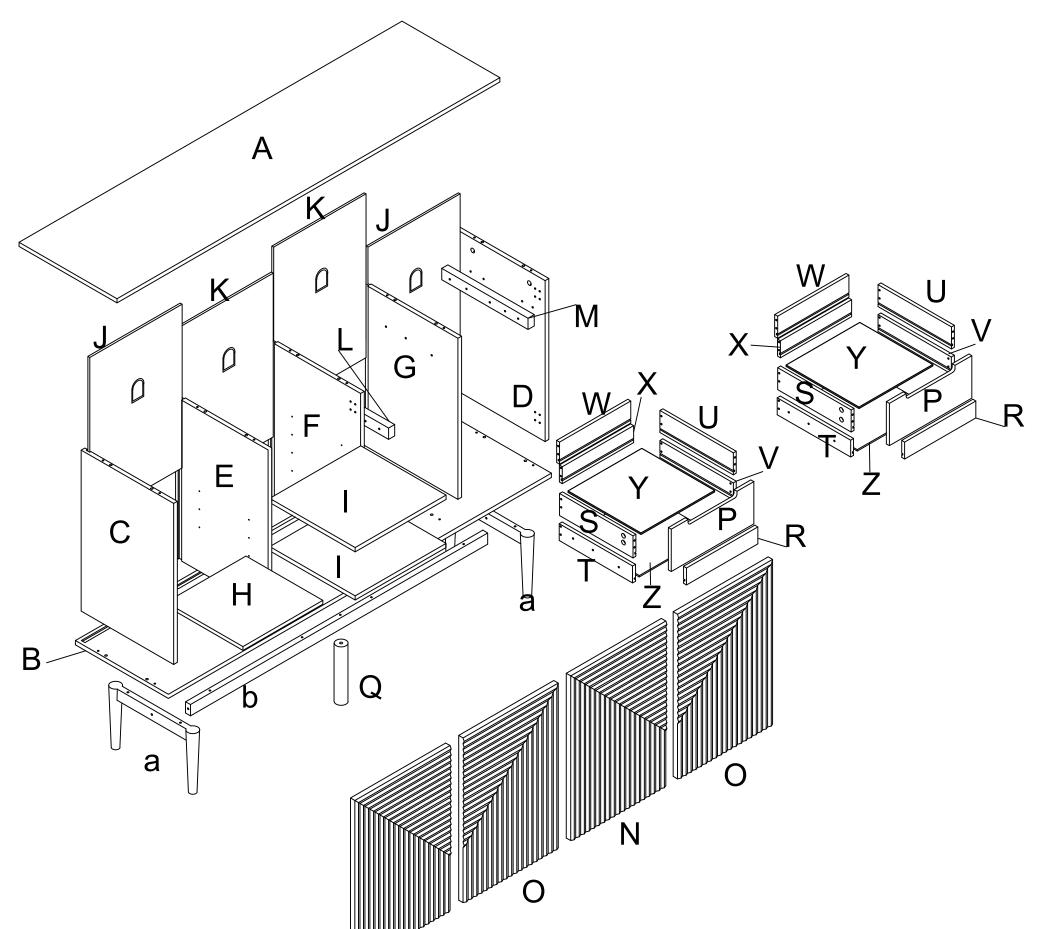









PARTS LIST

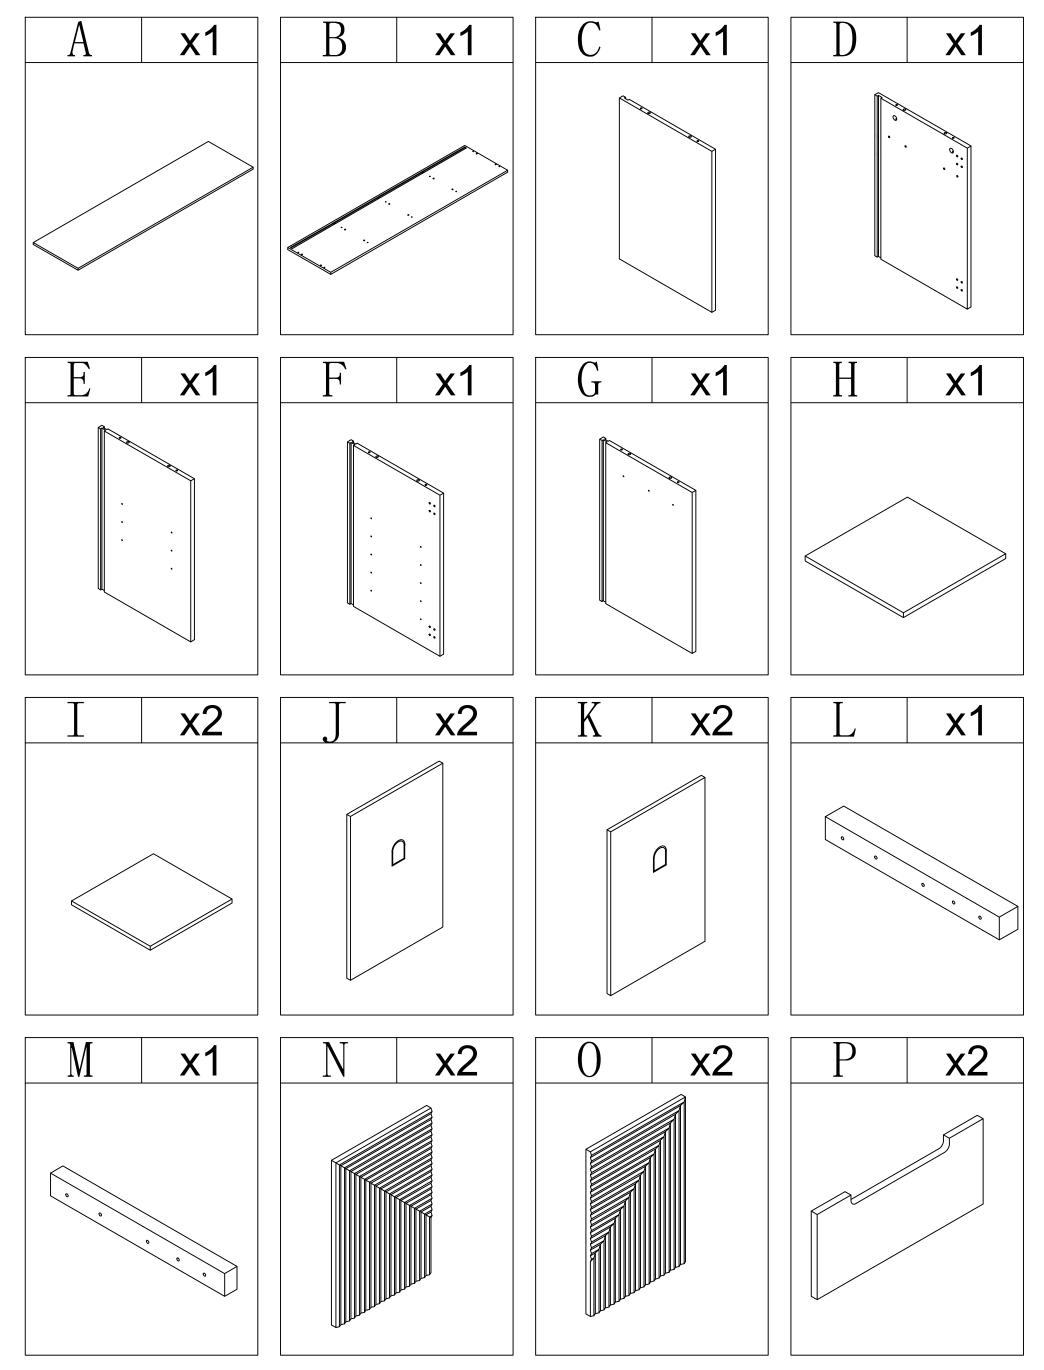


04/41

PARTS LIST

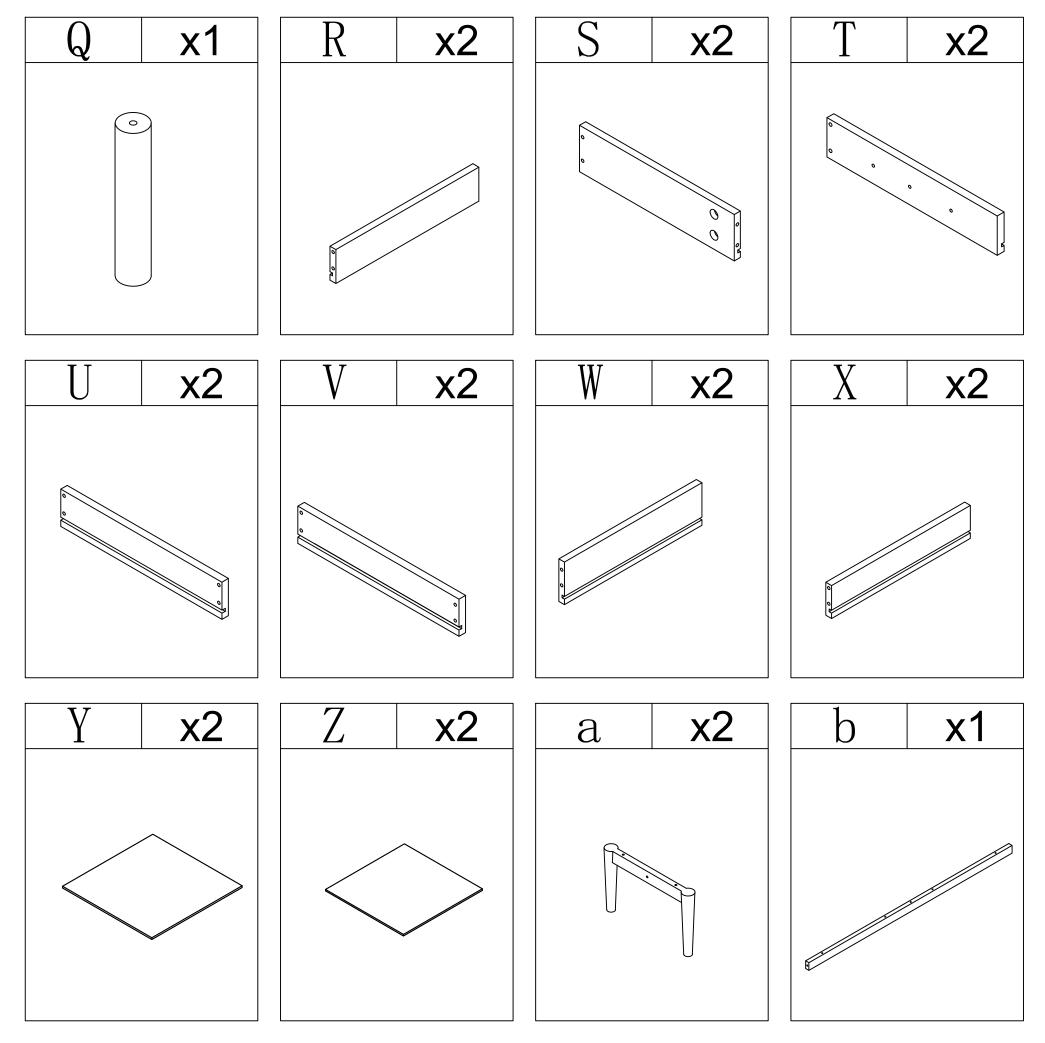




HARDWARE LIST

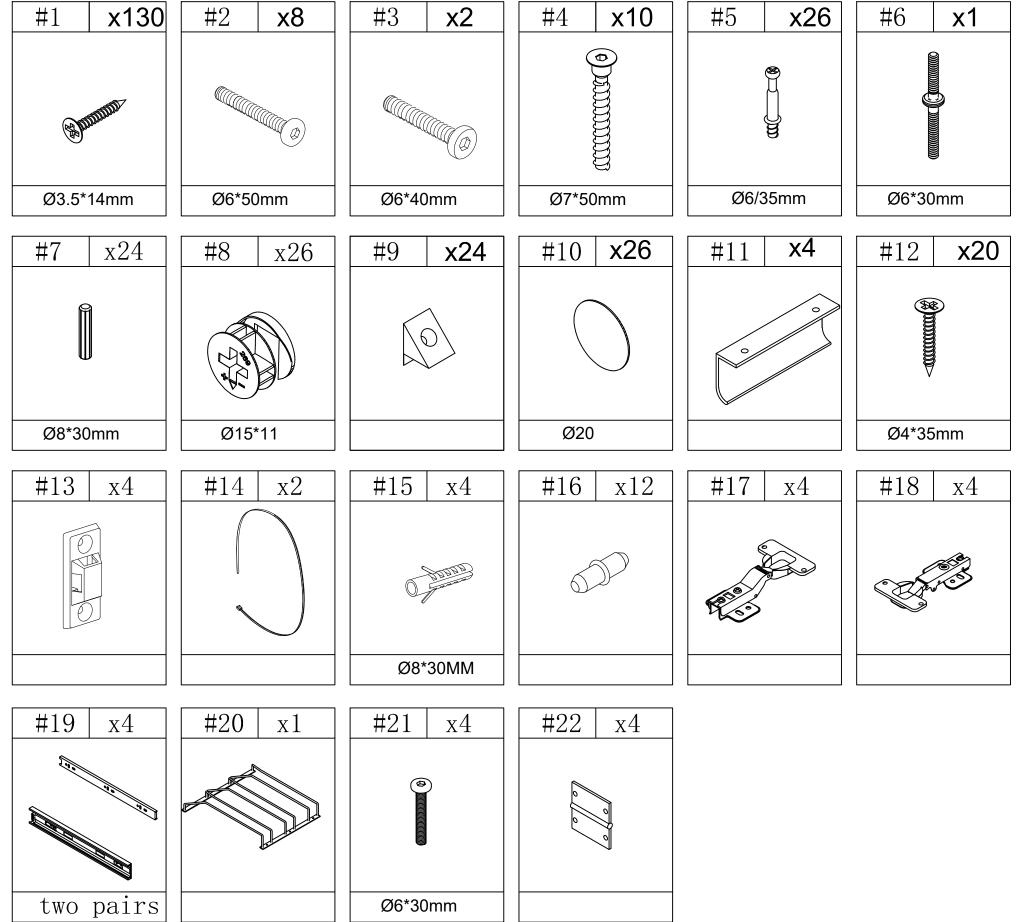


TOOL LIST

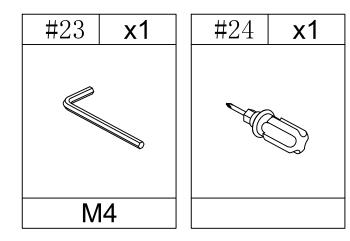





HARDWARE SPARE LIST

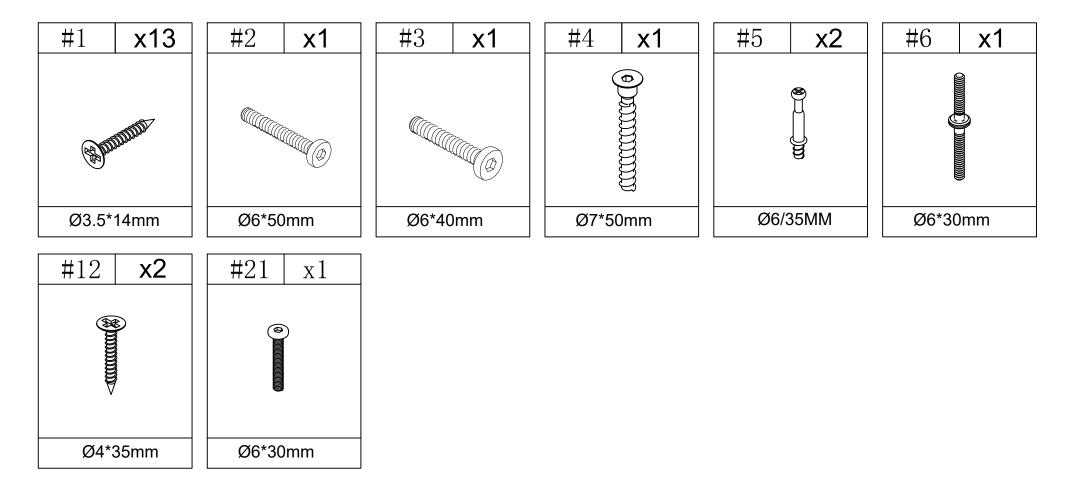




Align the holes in part D&F, insert wooden dowel #7 by hand.

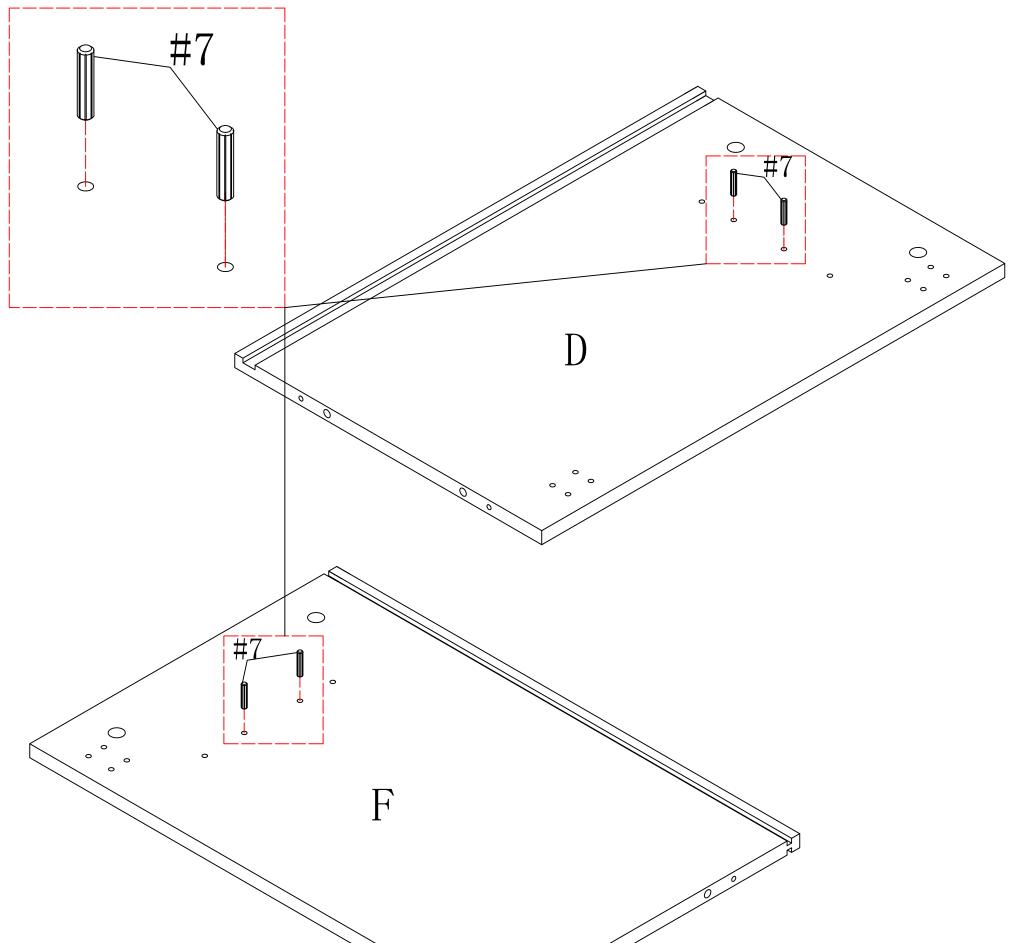











Use #21 screws to fix the wood M to the corresponding position of the panel (D), and tighten the screws with a #23 Allen key. Use #21 screws to fix the wood L to the corresponding position of the panel (F), and tighten the screws with a #23 Allen key.

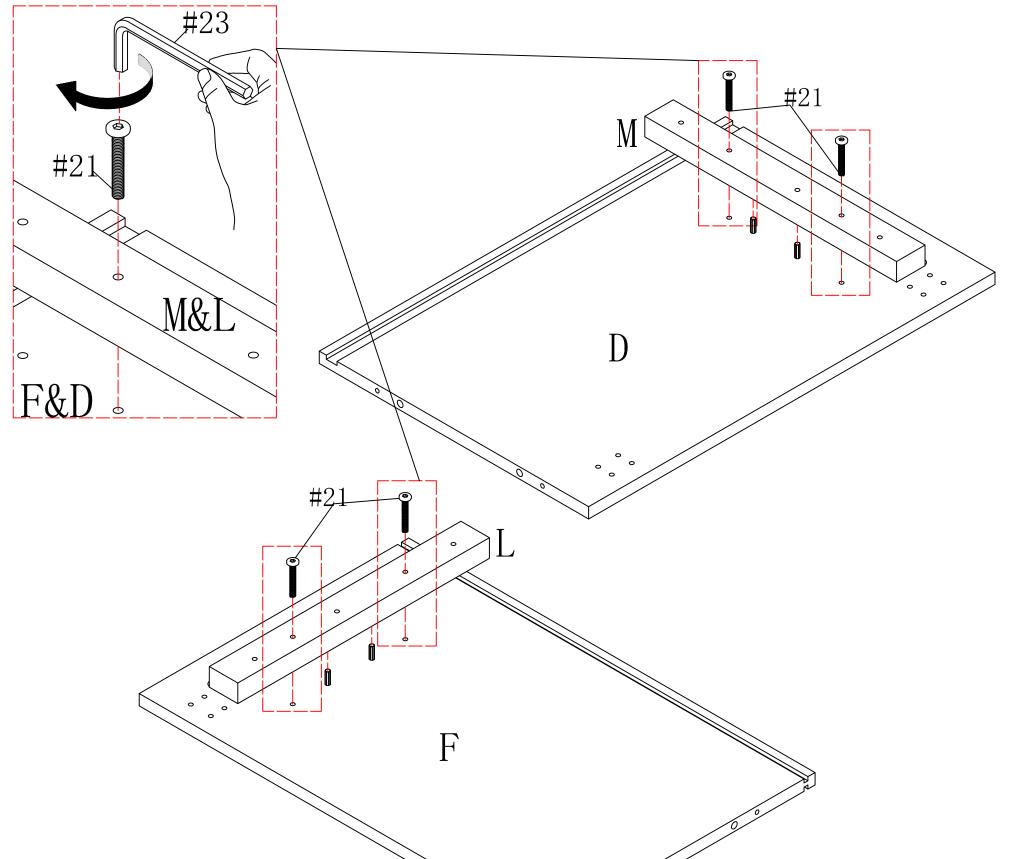


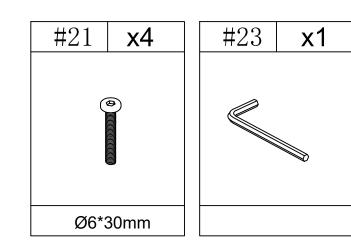





Lift the black button up with your hand and pull out the movable rail.

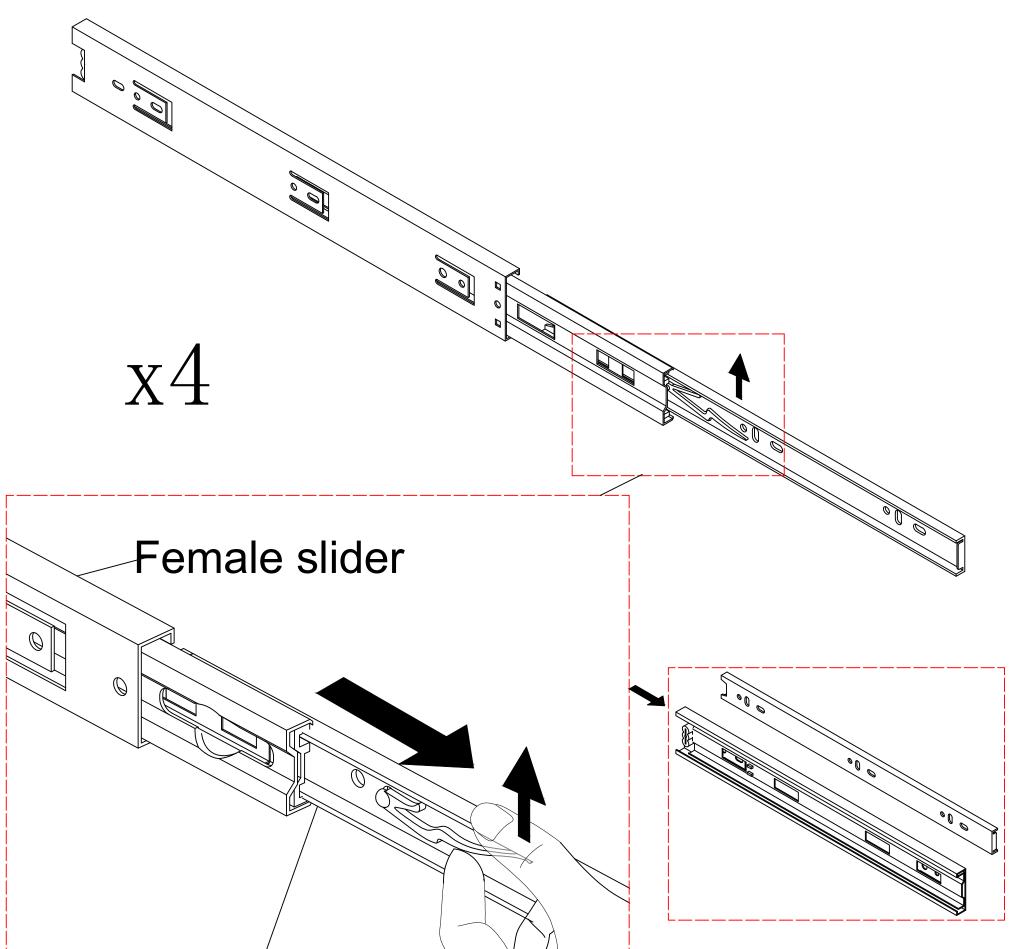




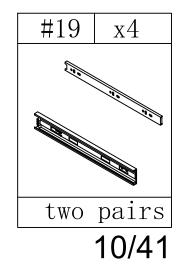


Use #1 screws to fix the slide rail #19 to the corresponding position of the part (M&L), and tighten the screws with a screwdriver#24.

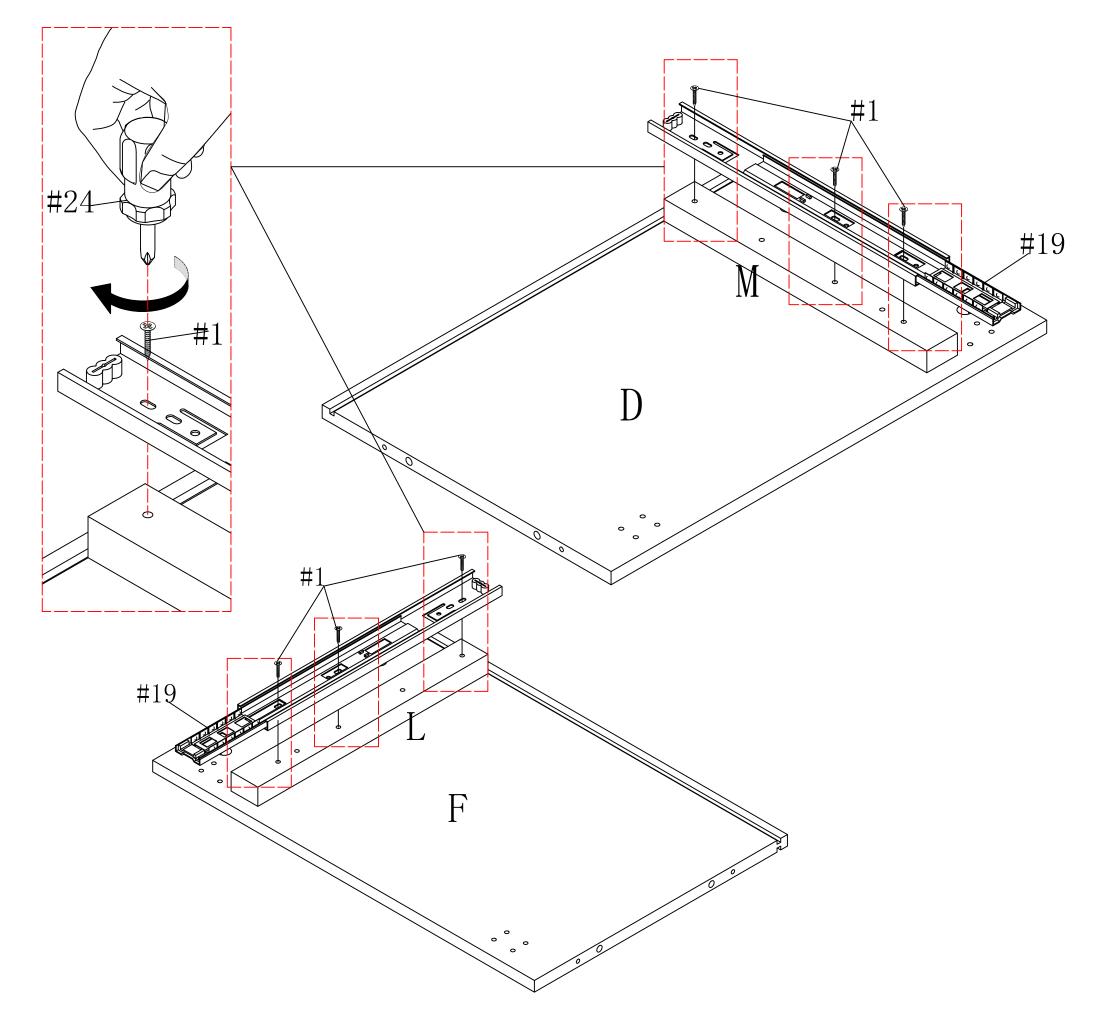

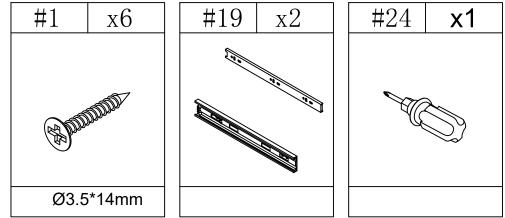



STEP-5

Use #1 screws to fix the slide rail #19 to the corresponding position of the part (G), and tighten the screws with a screwdriver#24.

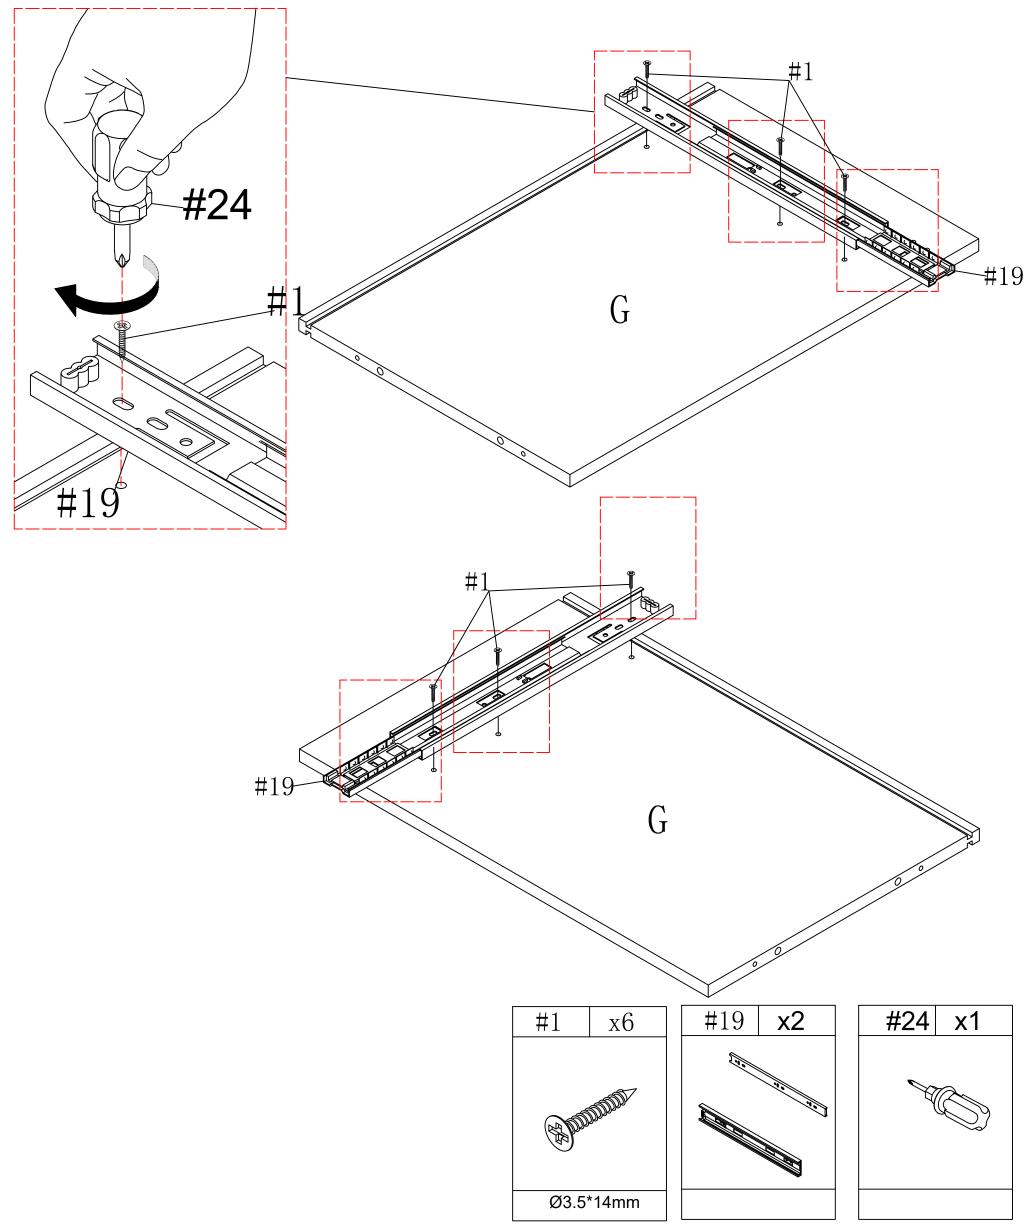


Prepare for part A. Align the holes in part A, insert wooden dowel #7 by hand, tighten with screwdriver #24 tighten #5.

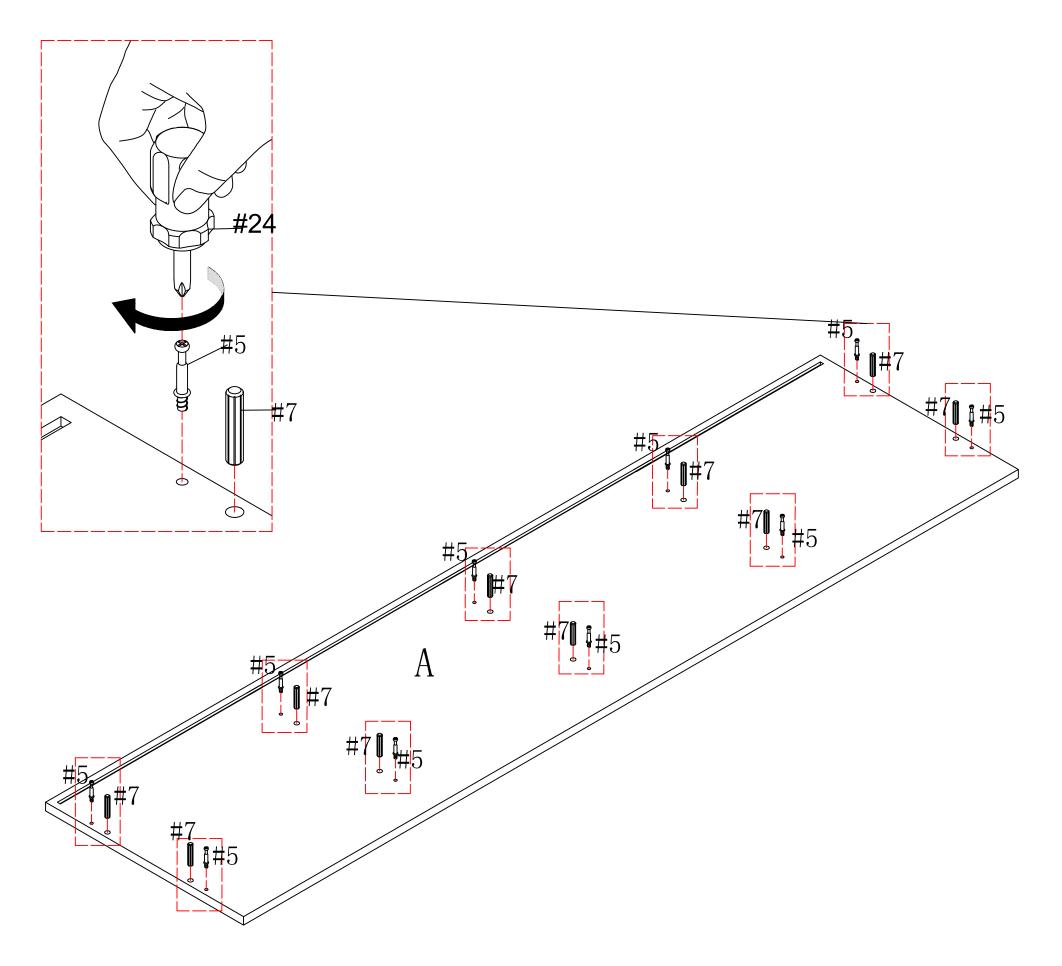


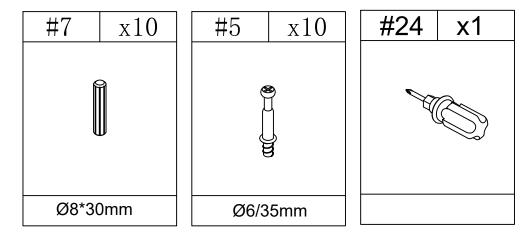

Connect the part A with part C&D&E&F&G. align the hole in the part C&D&E&F&G. ,insert the bolt #5 and wooden dowel #7 in part A into part C&D&E&F&G . insert cam bolt #8 into the corresponding hole of side panel C&D&E&F&G,and tighten the nuts #8 with a screwdriver #24. After installation, cover the screw holes with #10. Make sure the groove is in same side as picture show.

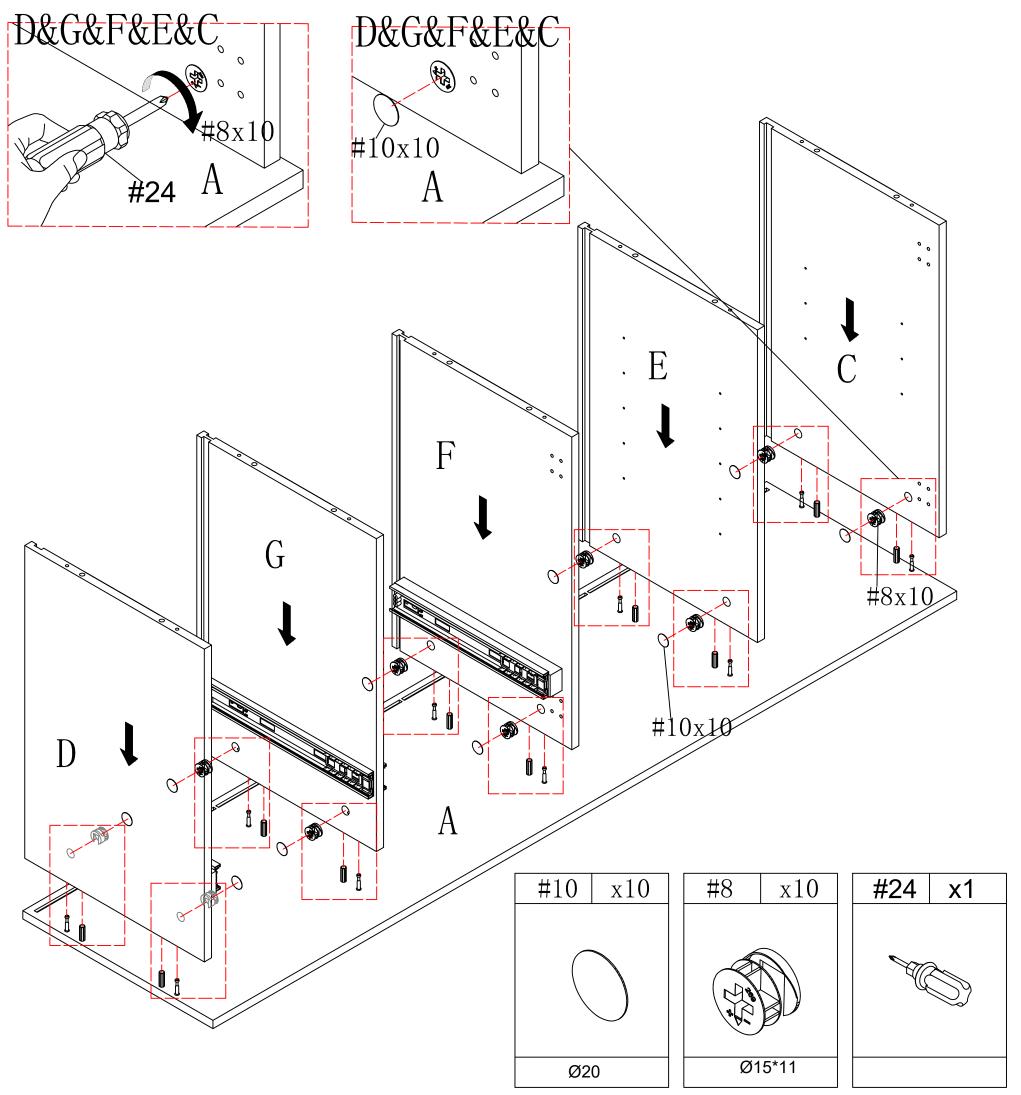


1.Manually insert #7 wooden dowels (C&D&E&F&G),Use screw #1 to attach wine glass holder #20 to the corresponding hole of panel(A), tighten screw with screwdriver #24.

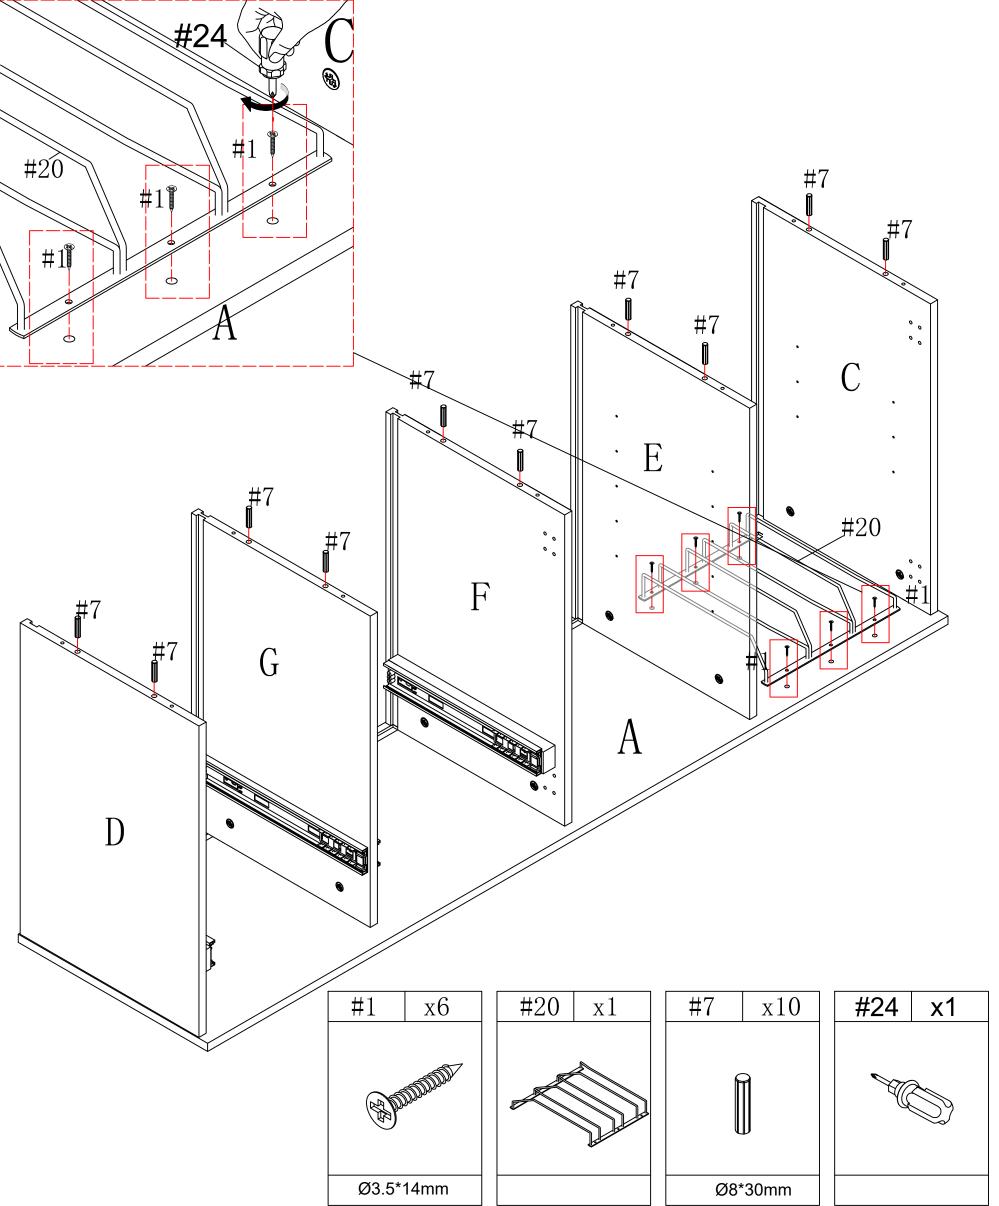

STEP-9

1.slide in the part J into the groove in part D,G and C&E ,slide in the part K into the groove in part G&F and F&E. make sure they are also in groove in part A.

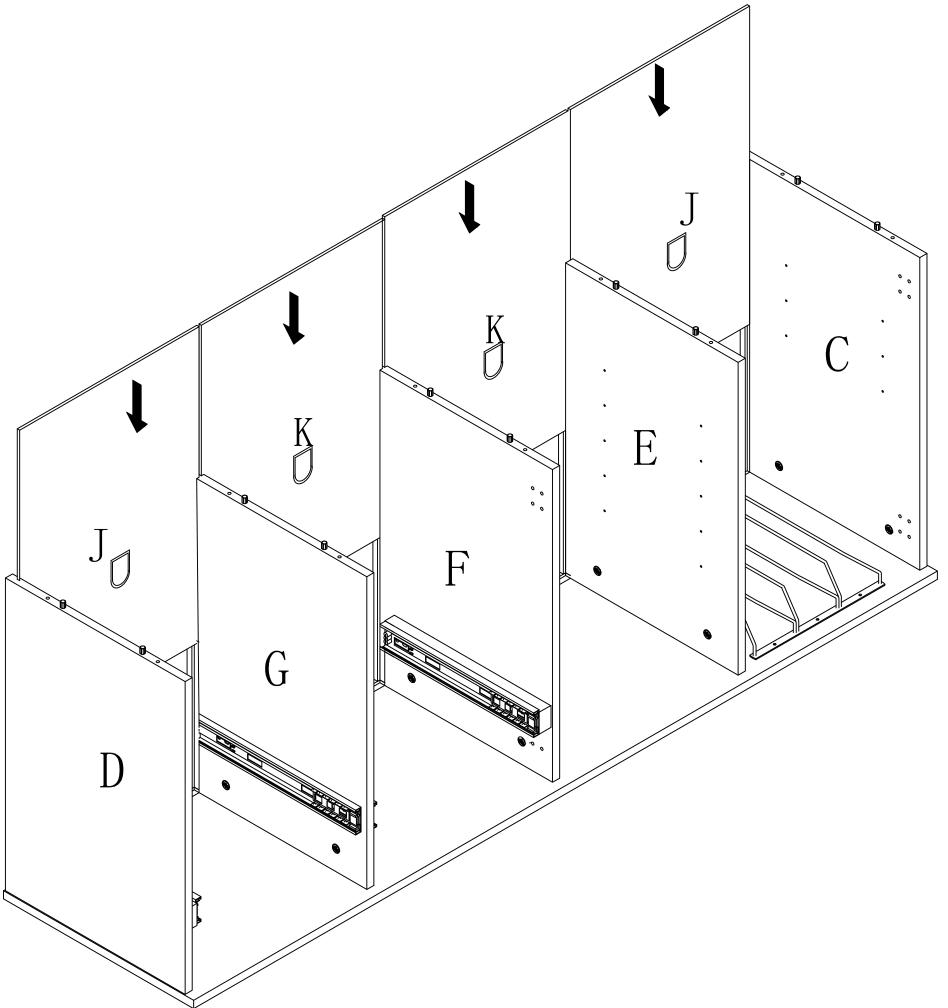





STEP-10

Connect the part B the pre-assembled unit in step 8.

Then align the holes in part B,Insert screw #4 and push it down so that it connects to parts C&D&E&F&G. Next,and tighten the screw #4 with an Allen key #23.

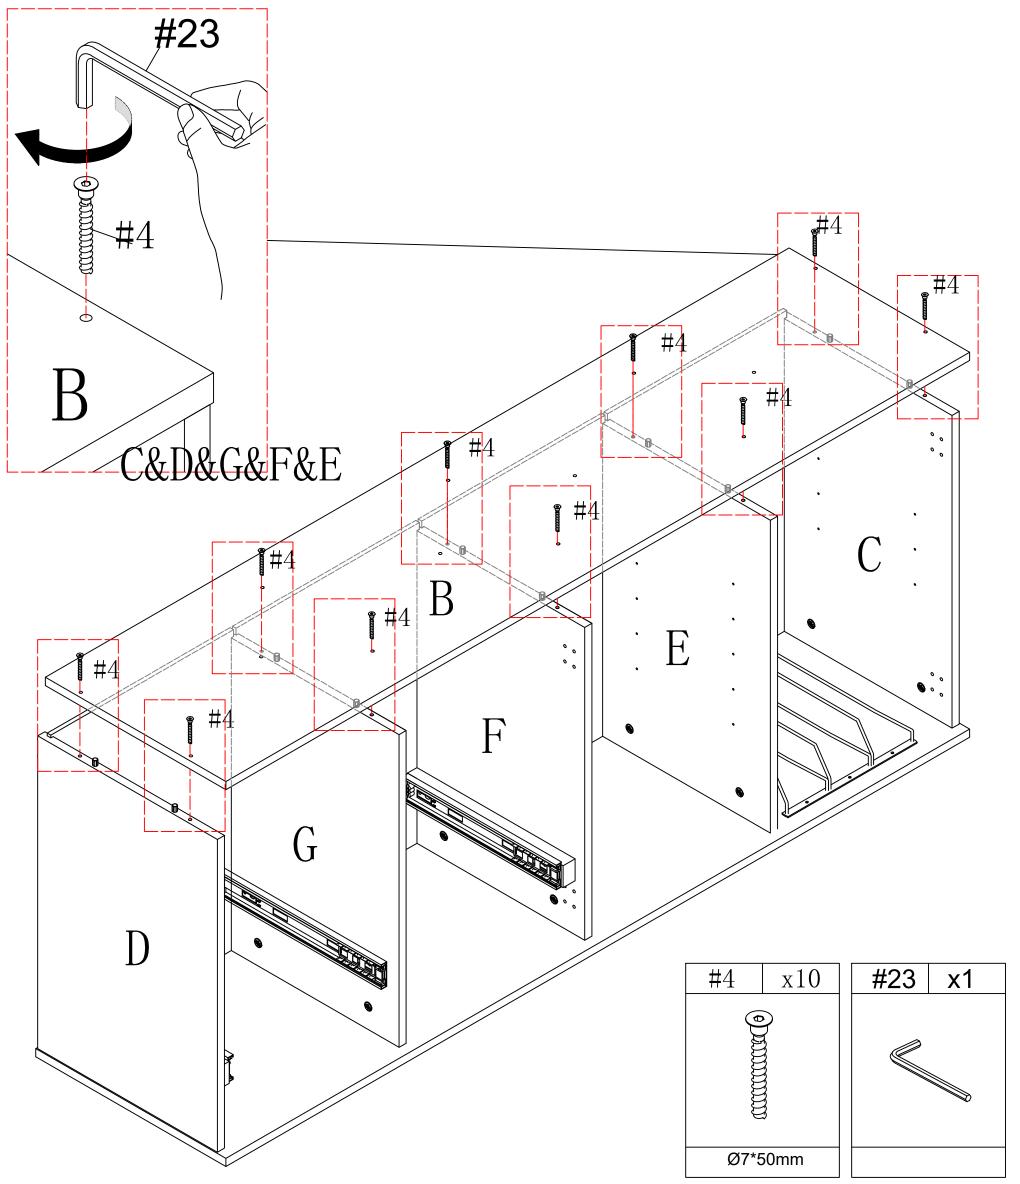



1.Align the holes of part b, insert the bolt #6, and bolt the middle foot into the bolt #Q.

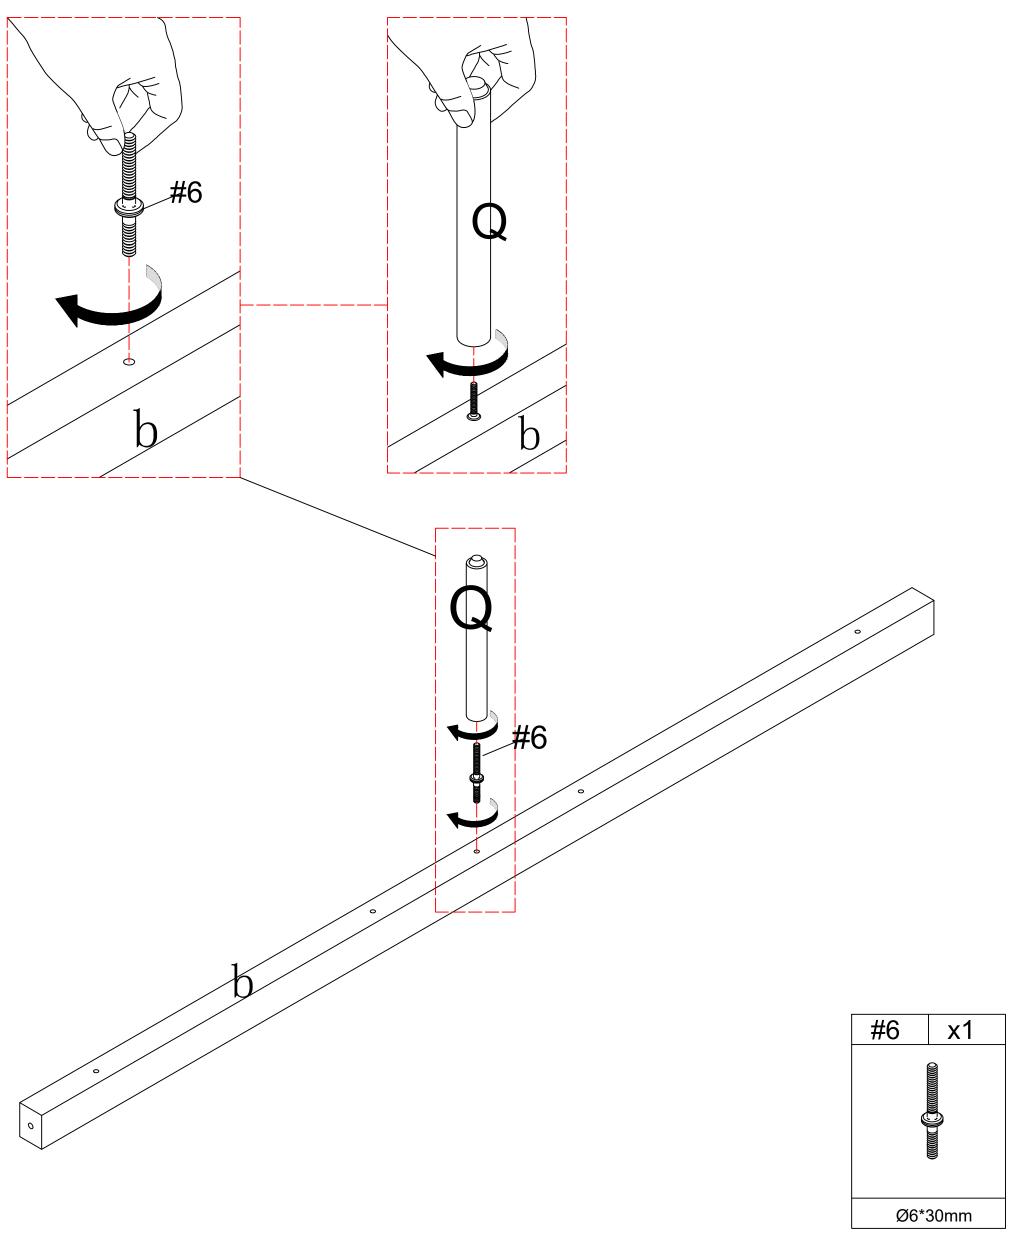




1.Prepare the leg racks. Align the holes of the a part with the holes of the b part, insert the screw #3, and tighten the screw #3 with the allen key #23.

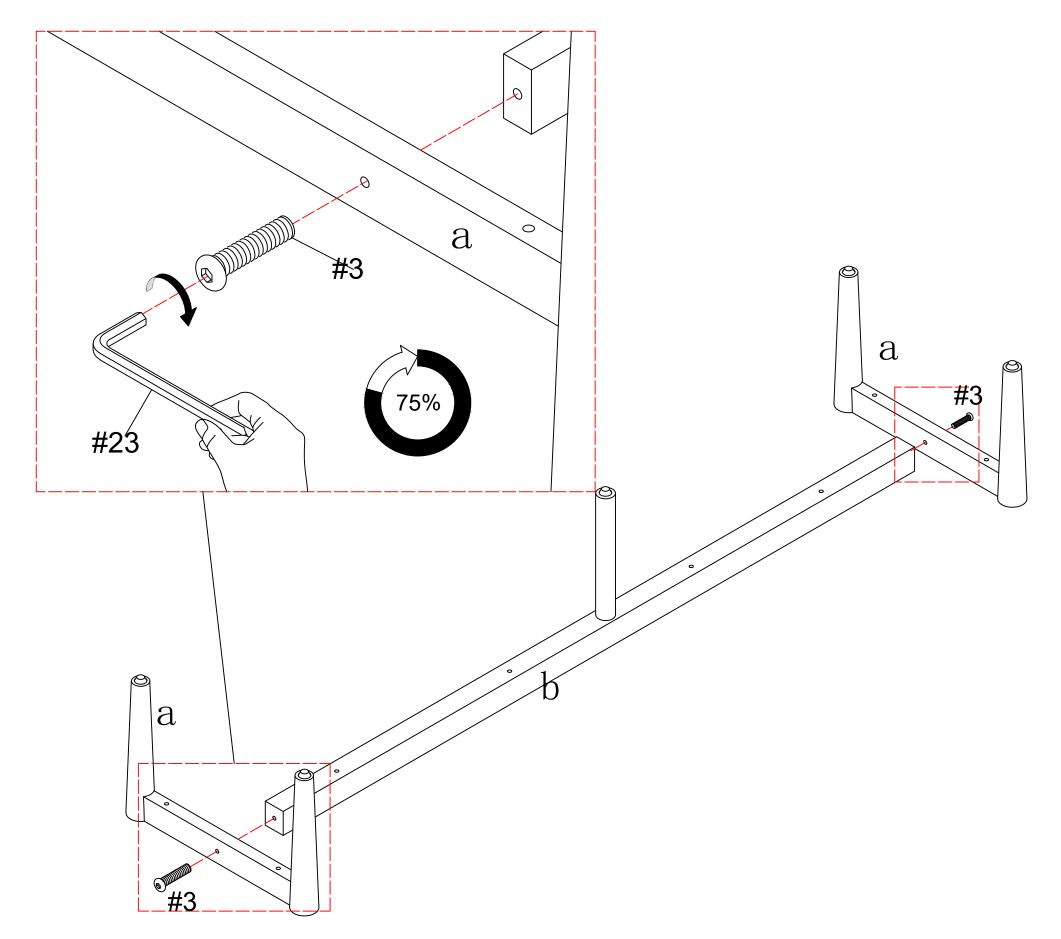

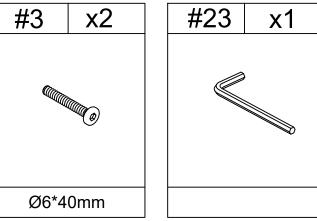

STEP-13


1.connect the leg frame to the cabinet.Attach the leg frame to the pre-assembled unit in step 9 with a screw #2 and tighten #2 with a allen key #23.

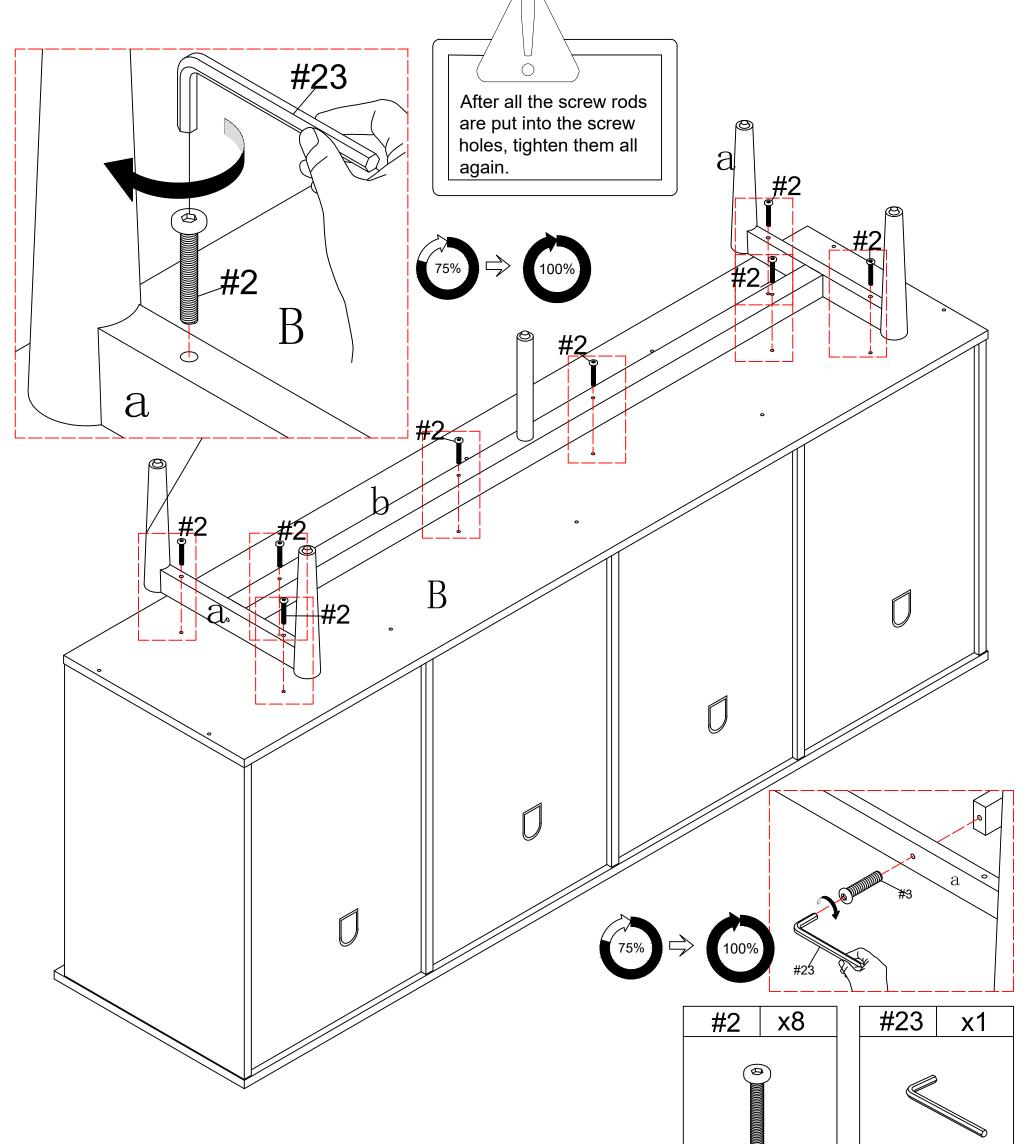



20/41

Ø6*50mm

1.Insert hardware #9 into part K&J as shown, screw in screw #1 using screwdriver #24 and tighten fully.

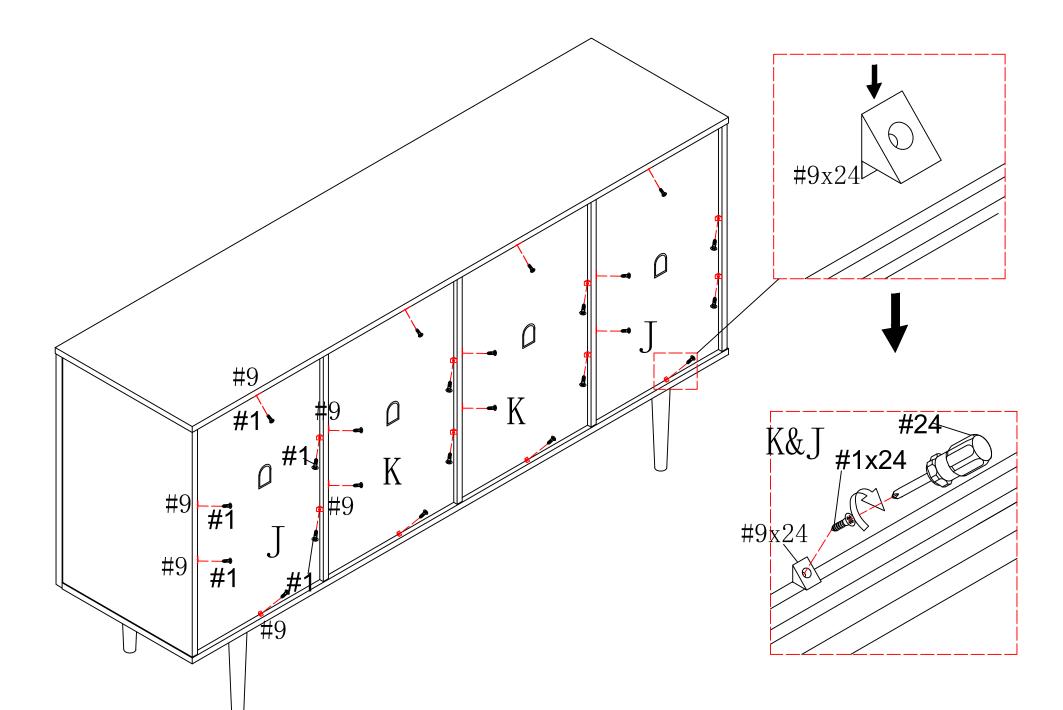


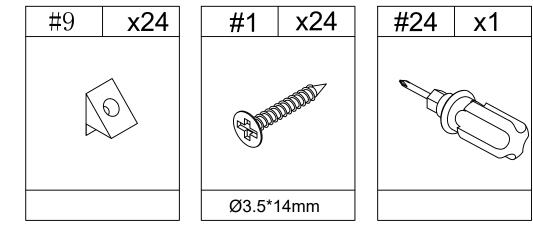


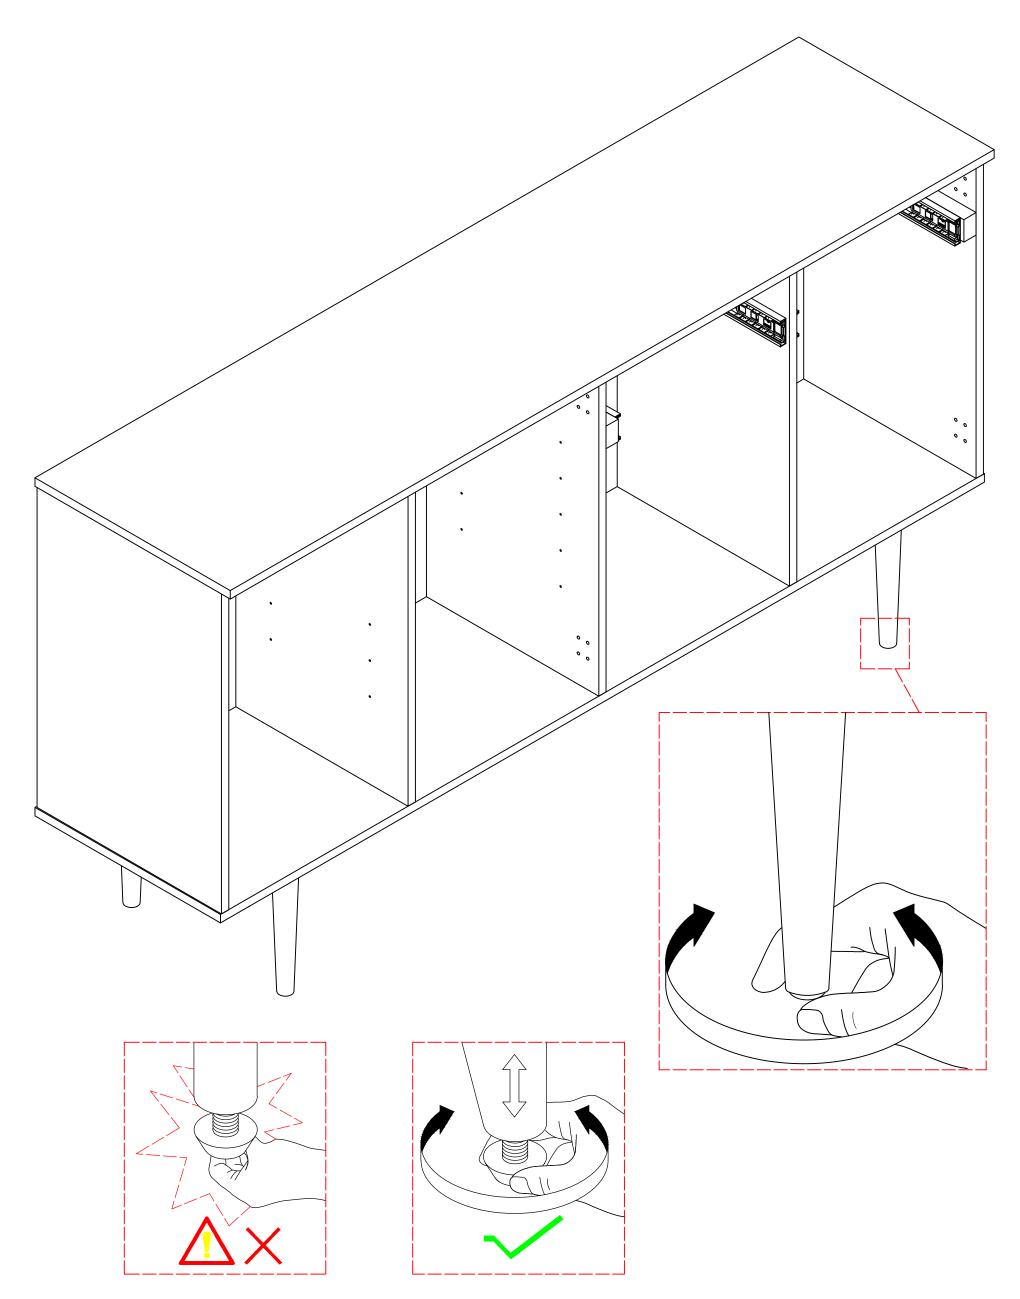




Prepare for part T&V. Align the holes in part A, i tighten with screwdriver #24 tighten #5.

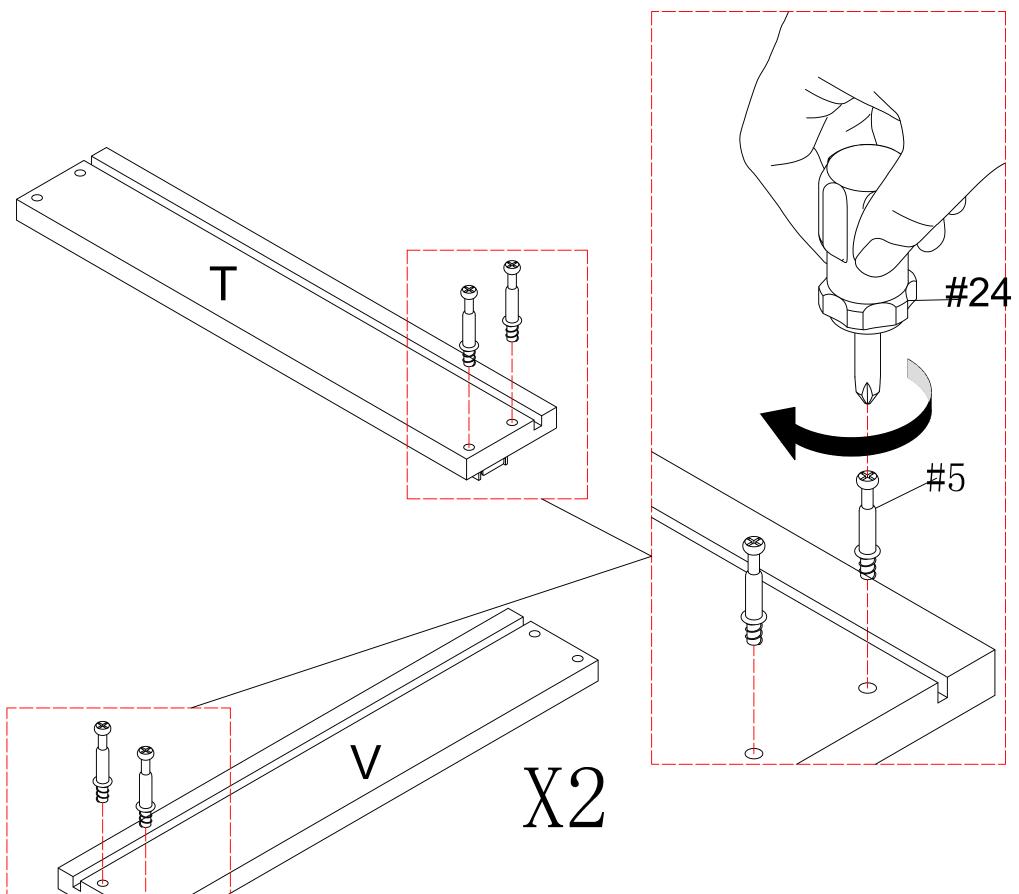




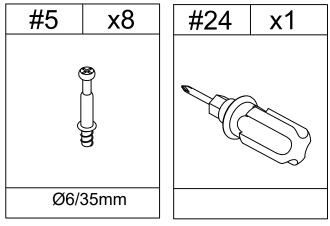


Connect the part R with part T&V align the hole in the part R., insert the bolt #5 in part T&V into part R . insert cam bolt #8 into the corresponding hole of side panel R, and tighten the nuts #8 with a screwdriver #24. After installation, cover the screw holes with #10. Make sure the groove is in same side as picture show.


slide in the part Z into the groove in part T&V. make sure they are also in groove in part R.

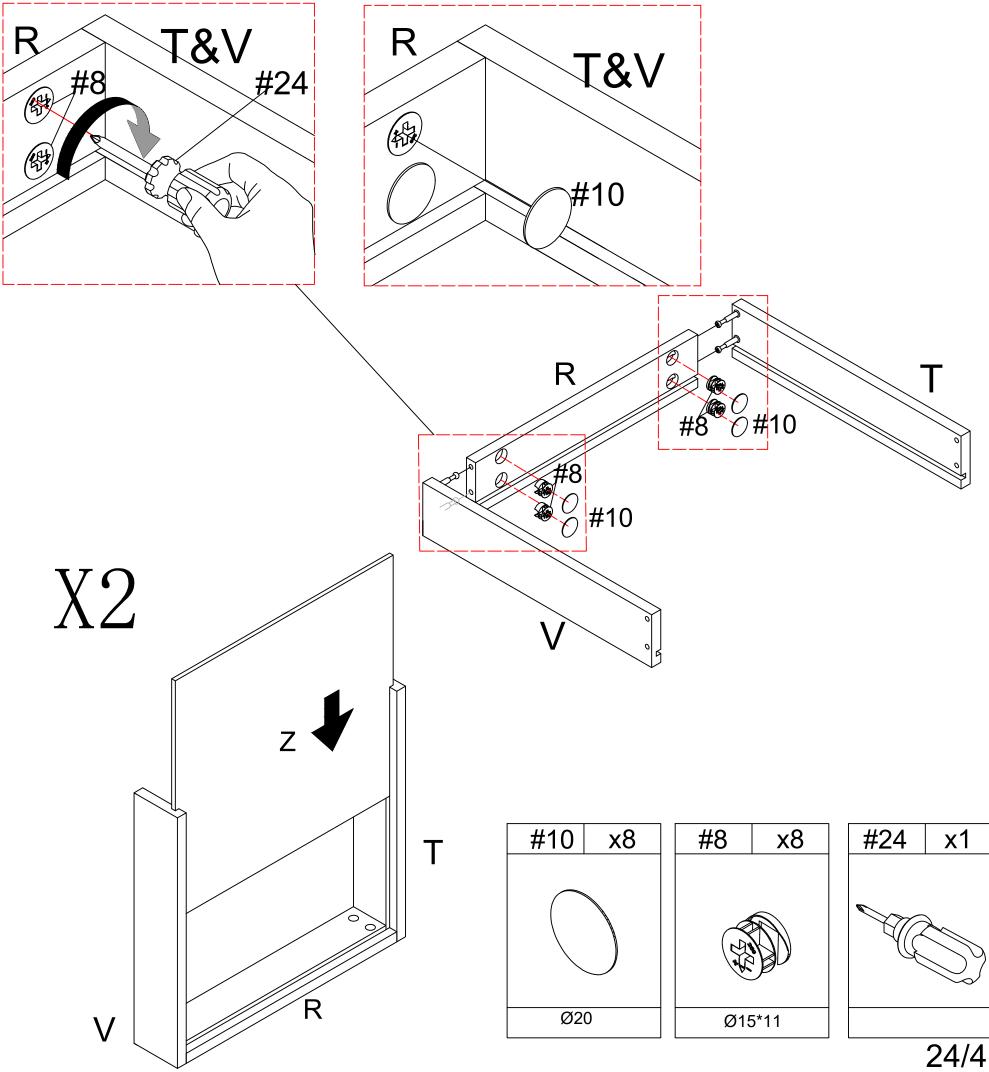


1.Attach the part X to the pre-assembled unit in step 16 with a screw #12 and tighten #12 with a screwdriver #24

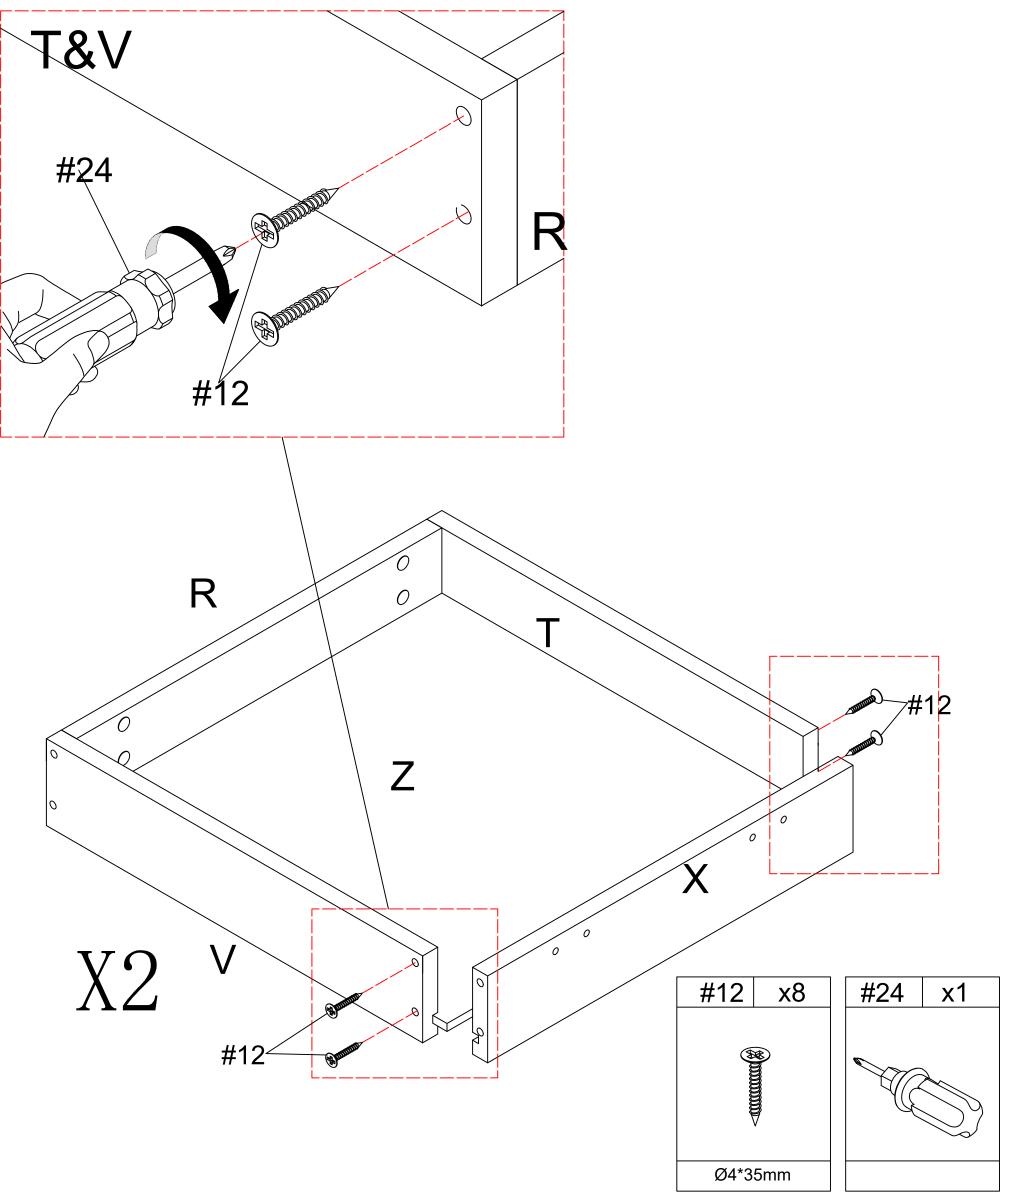


Use #1 screws to fix the slide rail #19 to the corresponding position of the part (T&V), and tighten the screws with a screwdriver#24.

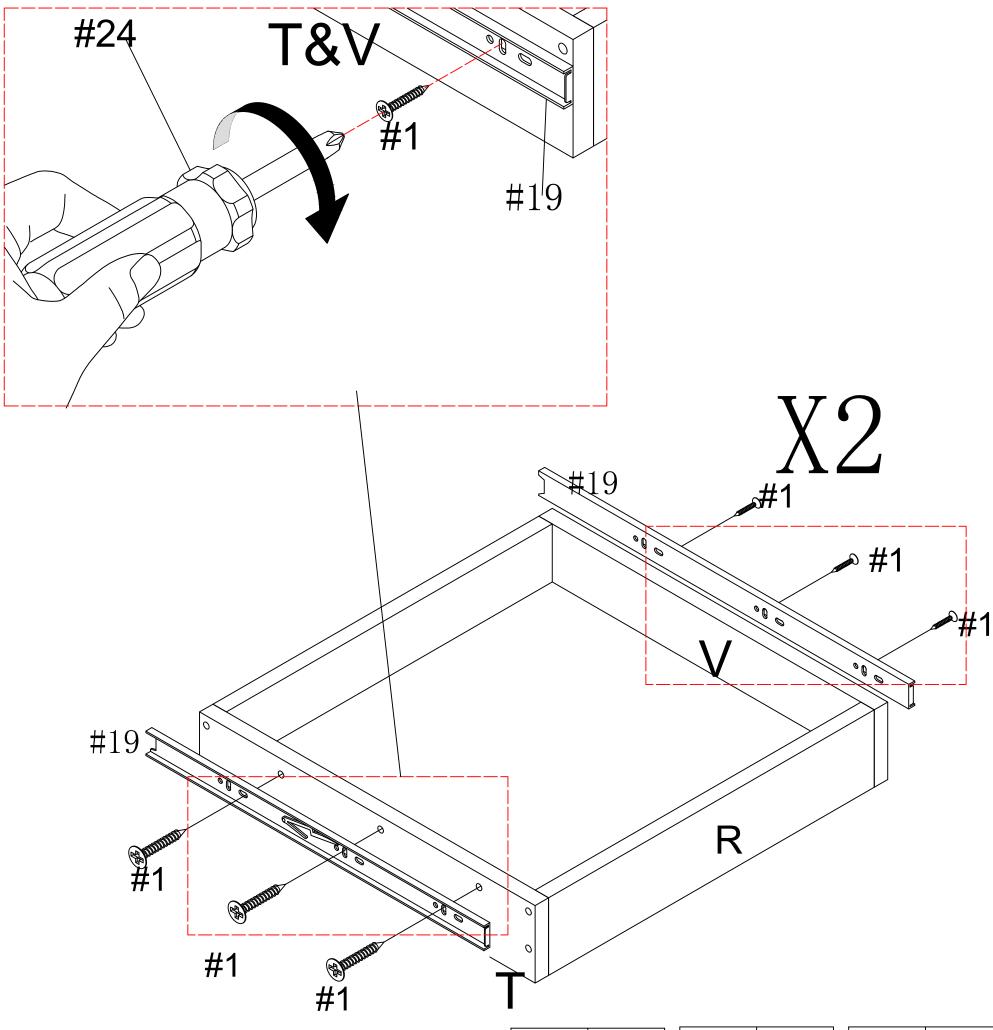


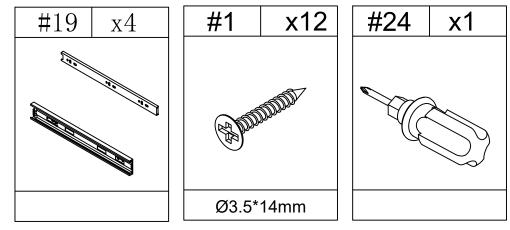


1.Connect part (U&S) to part W using screw #12 and tighten it with screwdriver #24 .Slide in the part (Y) into the groove in part (S&U). make sure they are also in groove in part (W).

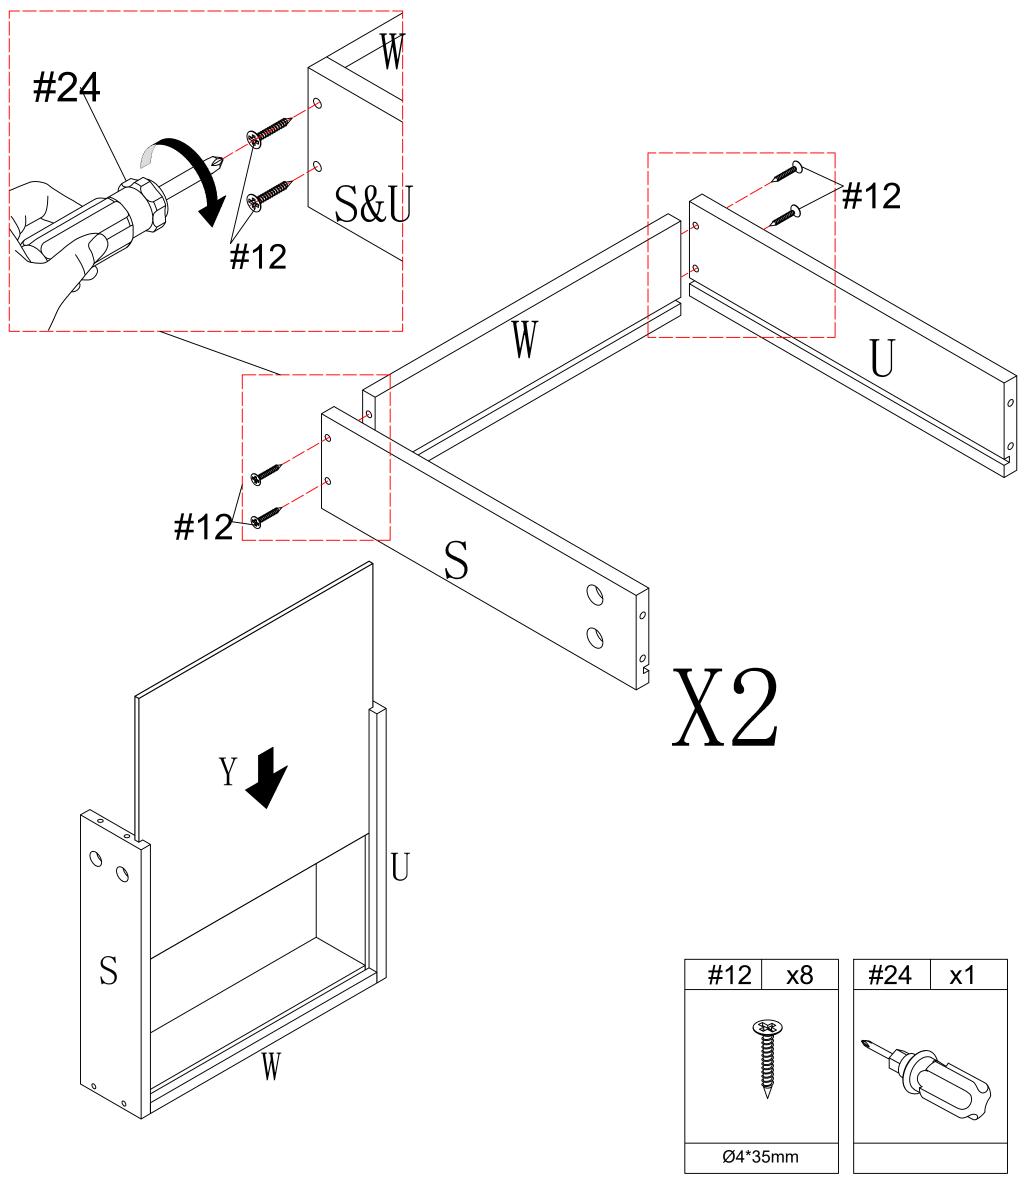

Align the holes in part P, tighten with screwdriver #24 tighten #5. Connect the part P with part S&U align the hole in the part <u>S&U</u>., insert the bolt #5 in part P into part S&U . insert cam bolt #8 into the corresponding hole of side panel S&U ,and tighten the nuts #8 with a screwdriver #24. After installation, cover the screw holes with #10. Make sure the groove is in same side as picture show.

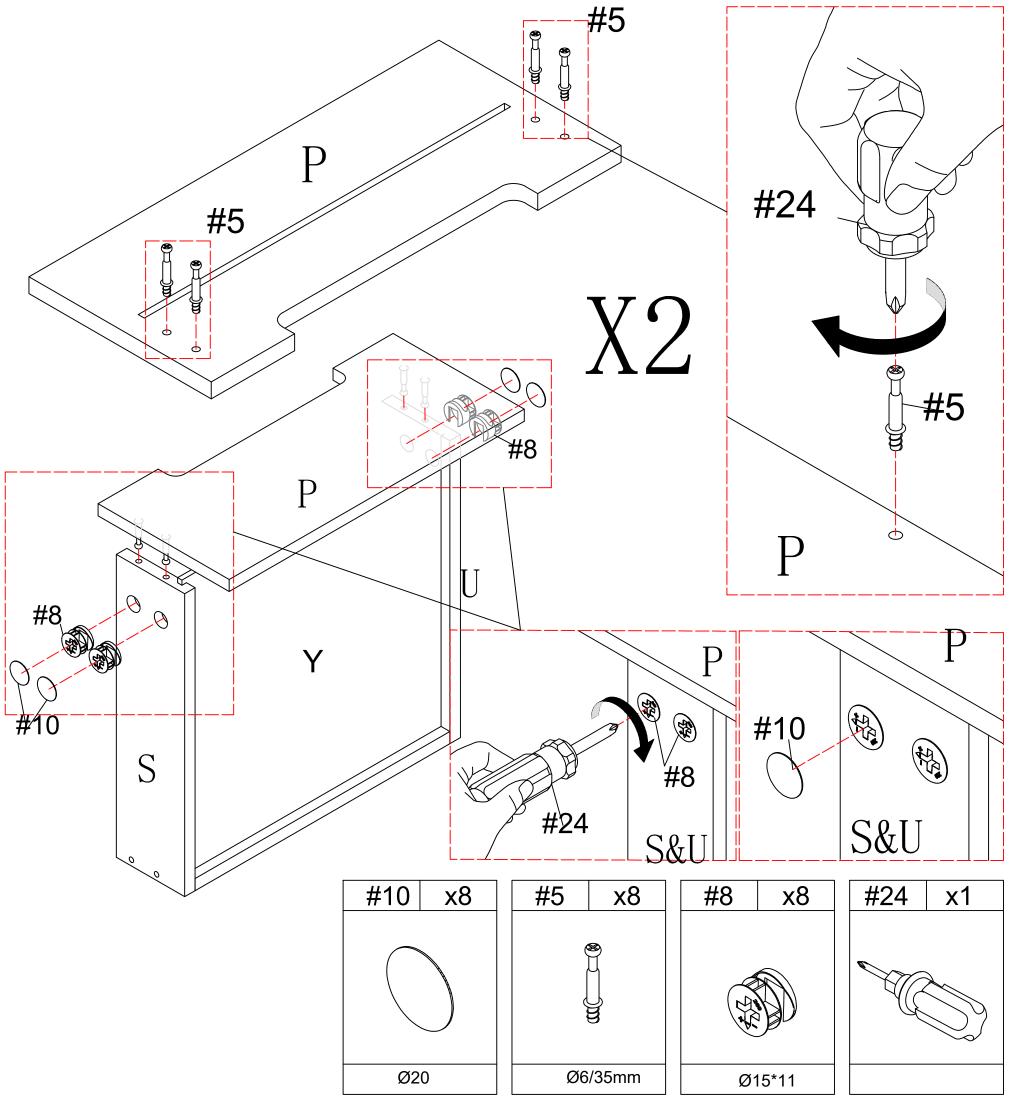


1.Use screw# 1 to attach hinge #22 to the corresponding hole of panel(W&X), tighten screw with screwdriver #24.

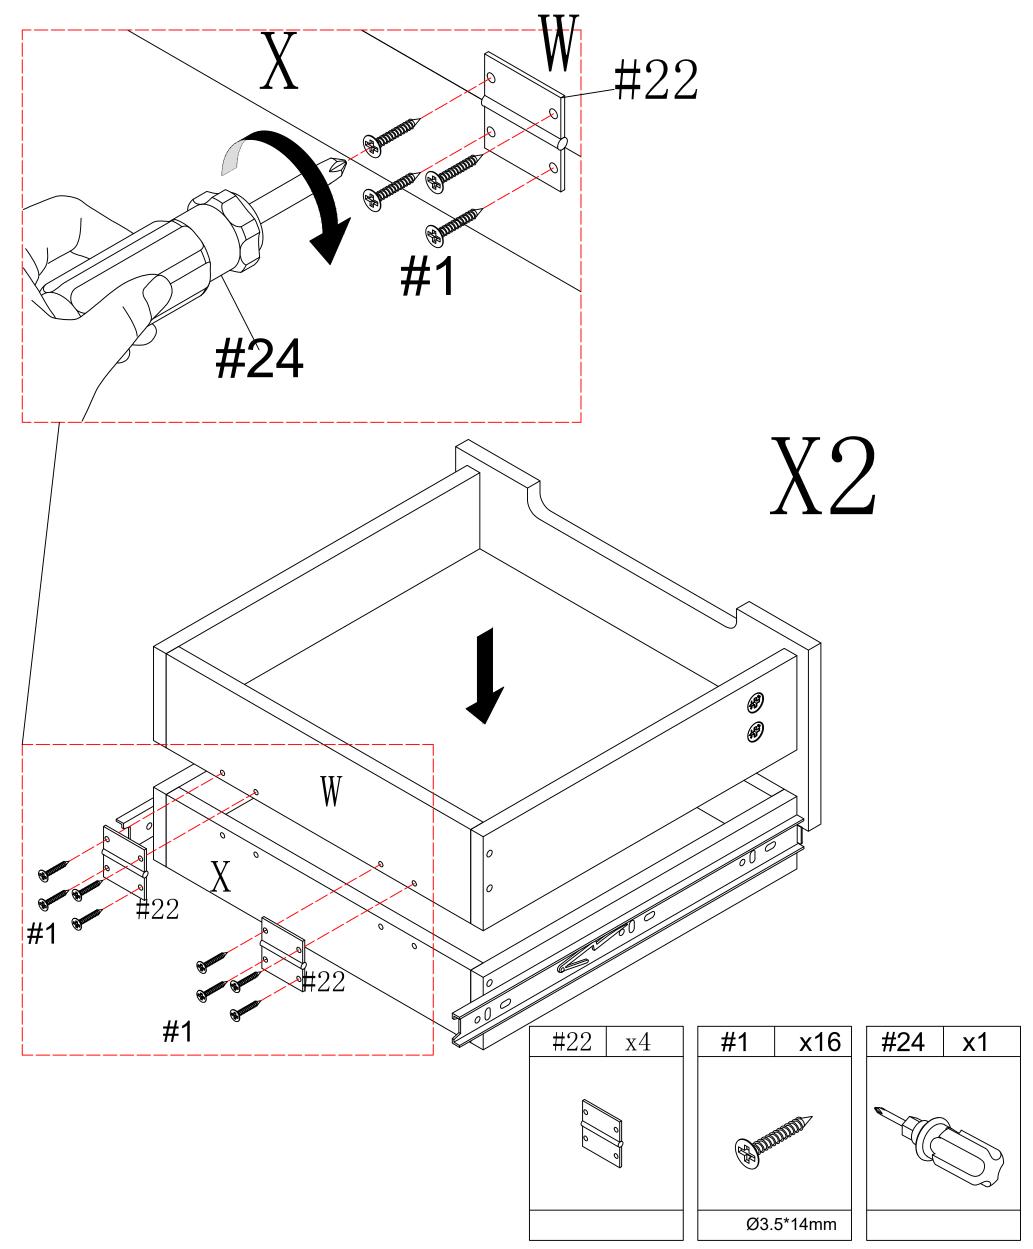


STEP-23

1.Use screw #1 to attach the hinges #18 to door panel (O&N), tighten screws #6 with screwdriver #24.


1.Use screw# 1 to attach handle #11 to the corresponding hole of panel(O&N), tighten screw with screwdriver #24.

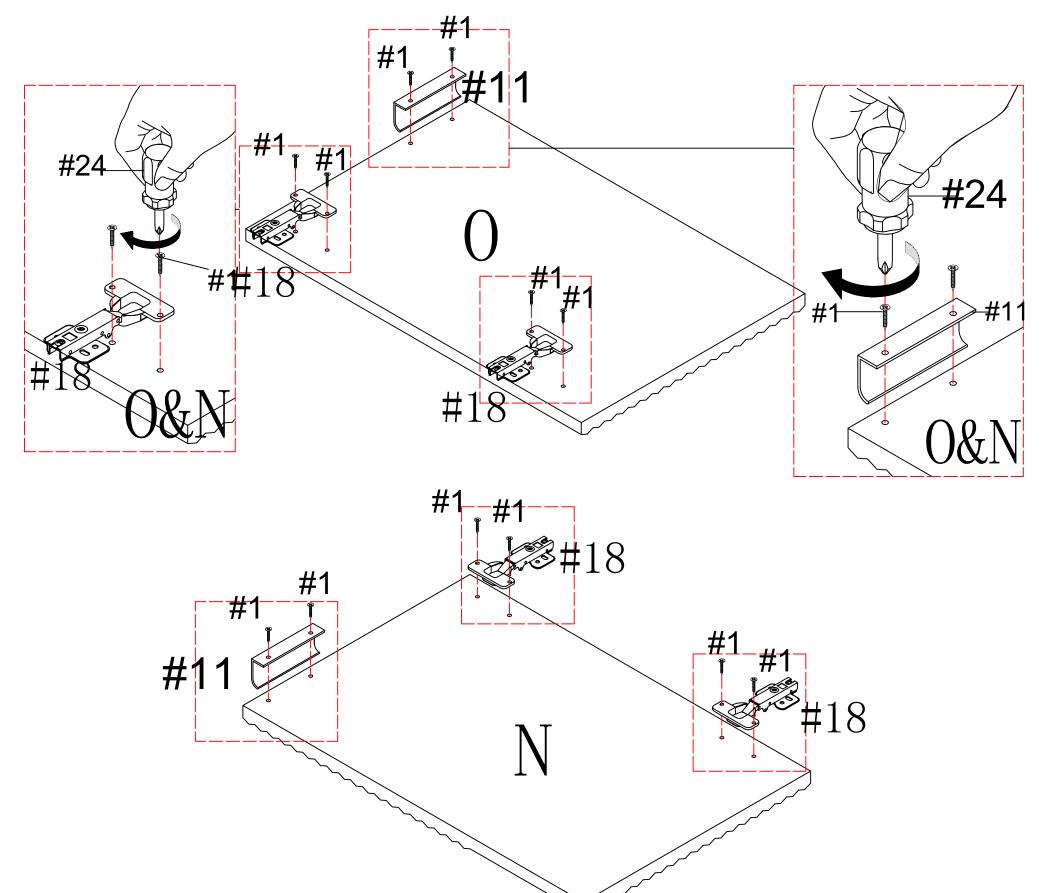



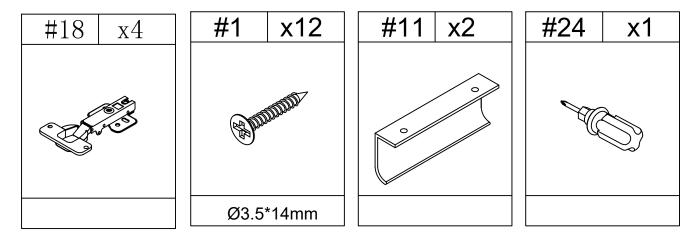


1.Use screw #1 to attach left door (N) and right door (O) to pre-assemble unit at step 14, tighten screw #1 with screwdriver #24.

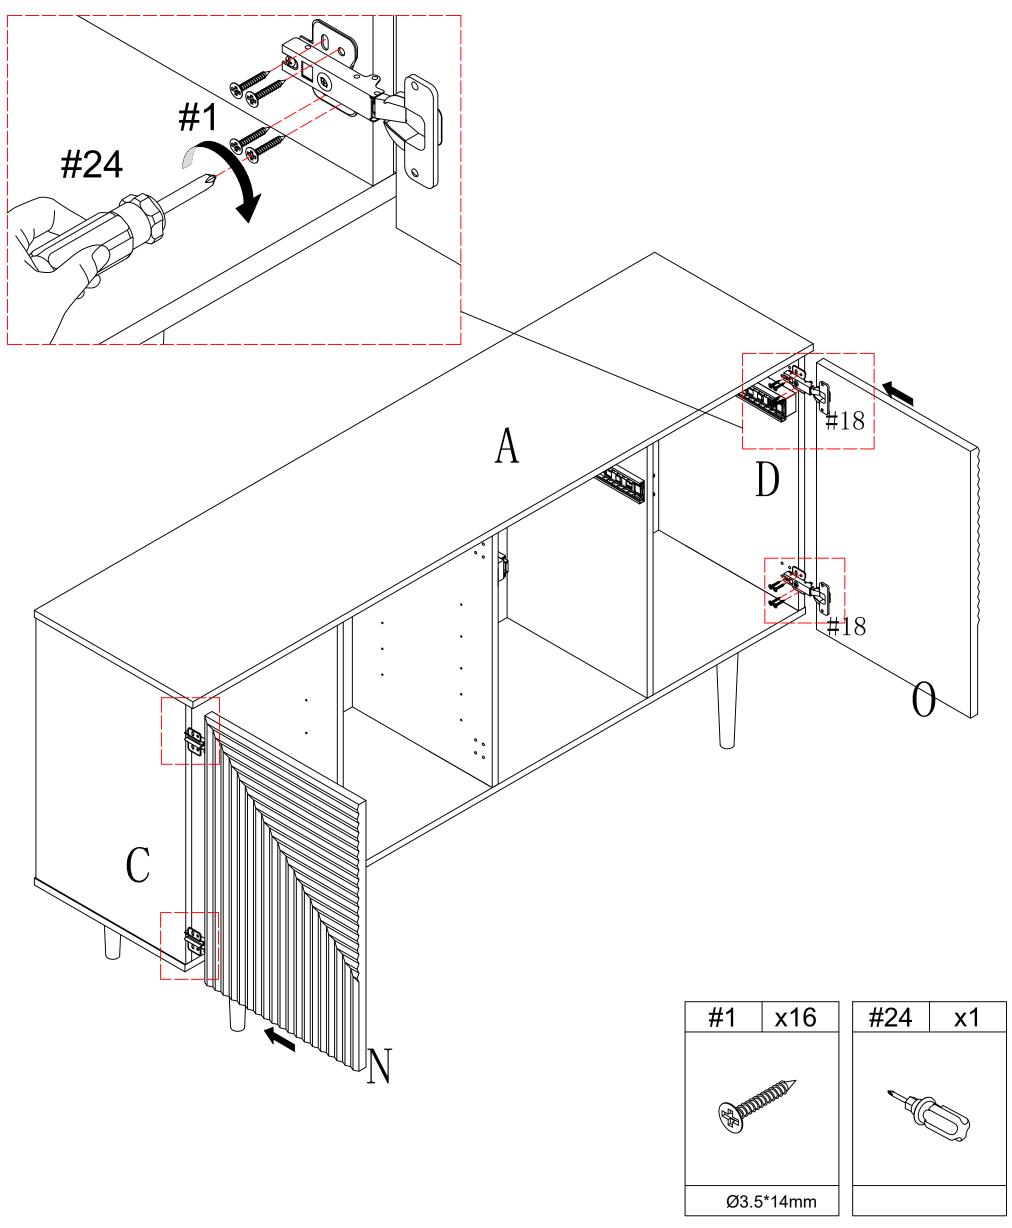


STEP-25


1.Use screw #1 to attach the hinges #17 to door panel (O&N), tighten screws #6 with screwdriver #24.

1.Use screw# 1 to attach handle #11 to the corresponding hole of panel(O&N), tighten screw with screwdriver #24.

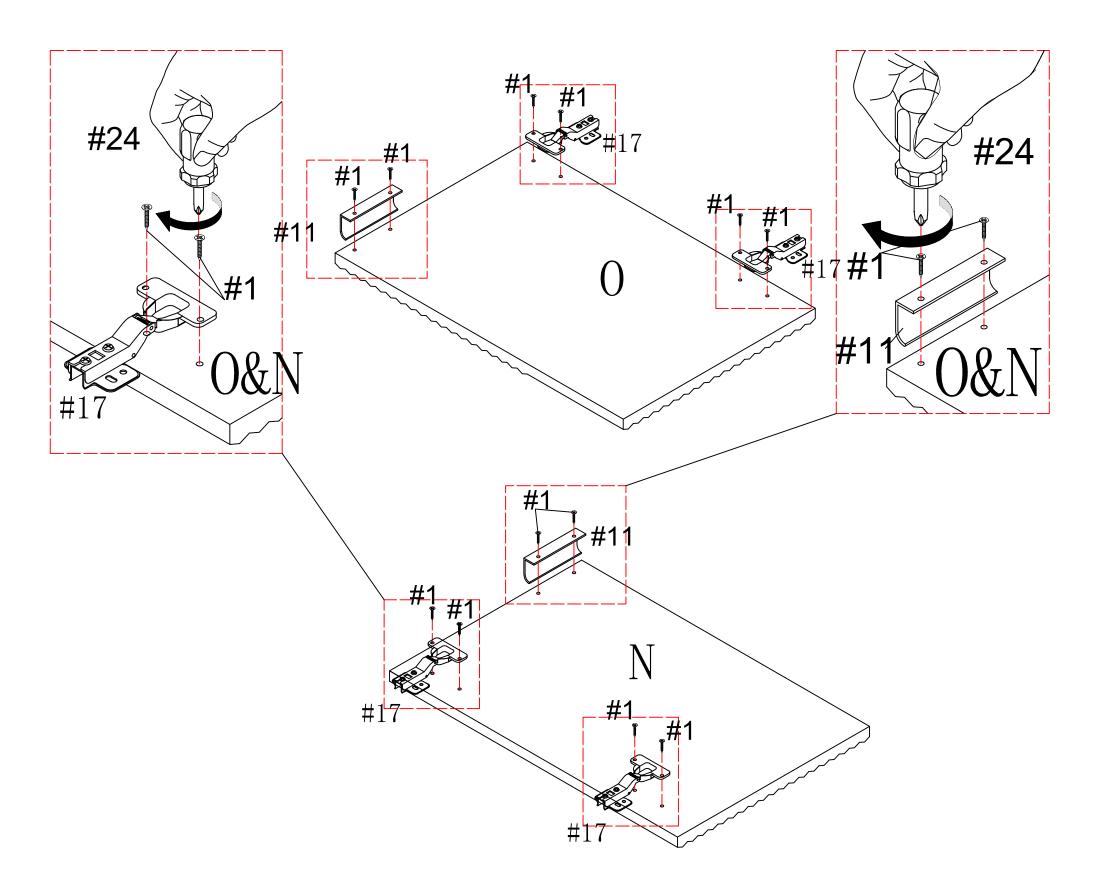


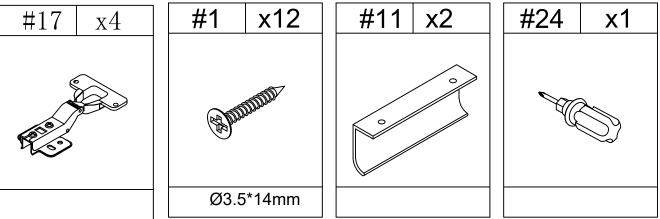


1.Use screw #1 to attach middle door (O) to pre-assemble unit at step 25, tighten screw #1 with screwdriver #24.

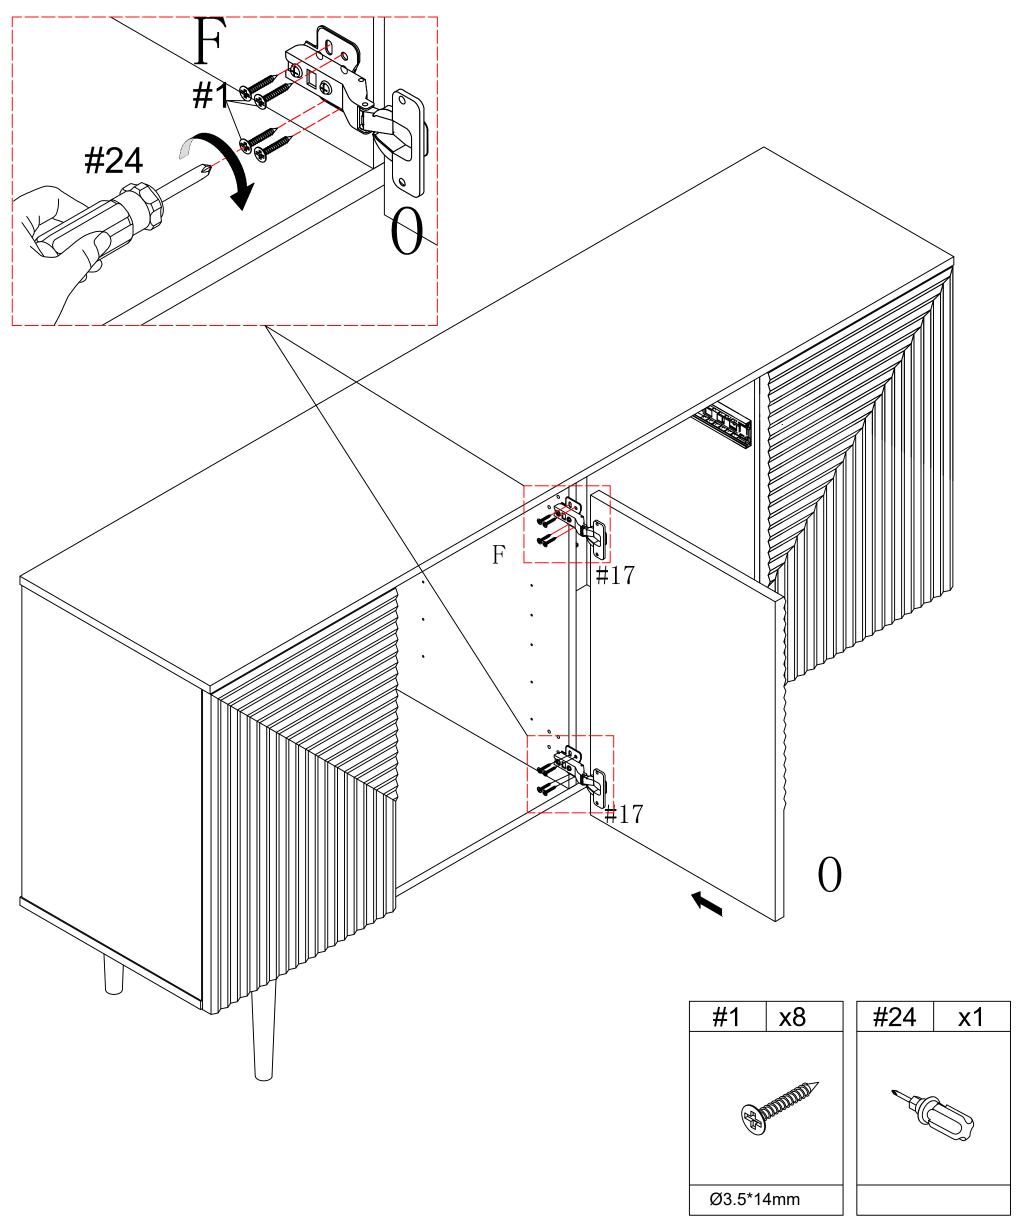


1.Use screw #1 to attach middle door (N) to pre-assemble unit at step 27 ,tighten screw #1 with screwdriver #24 .

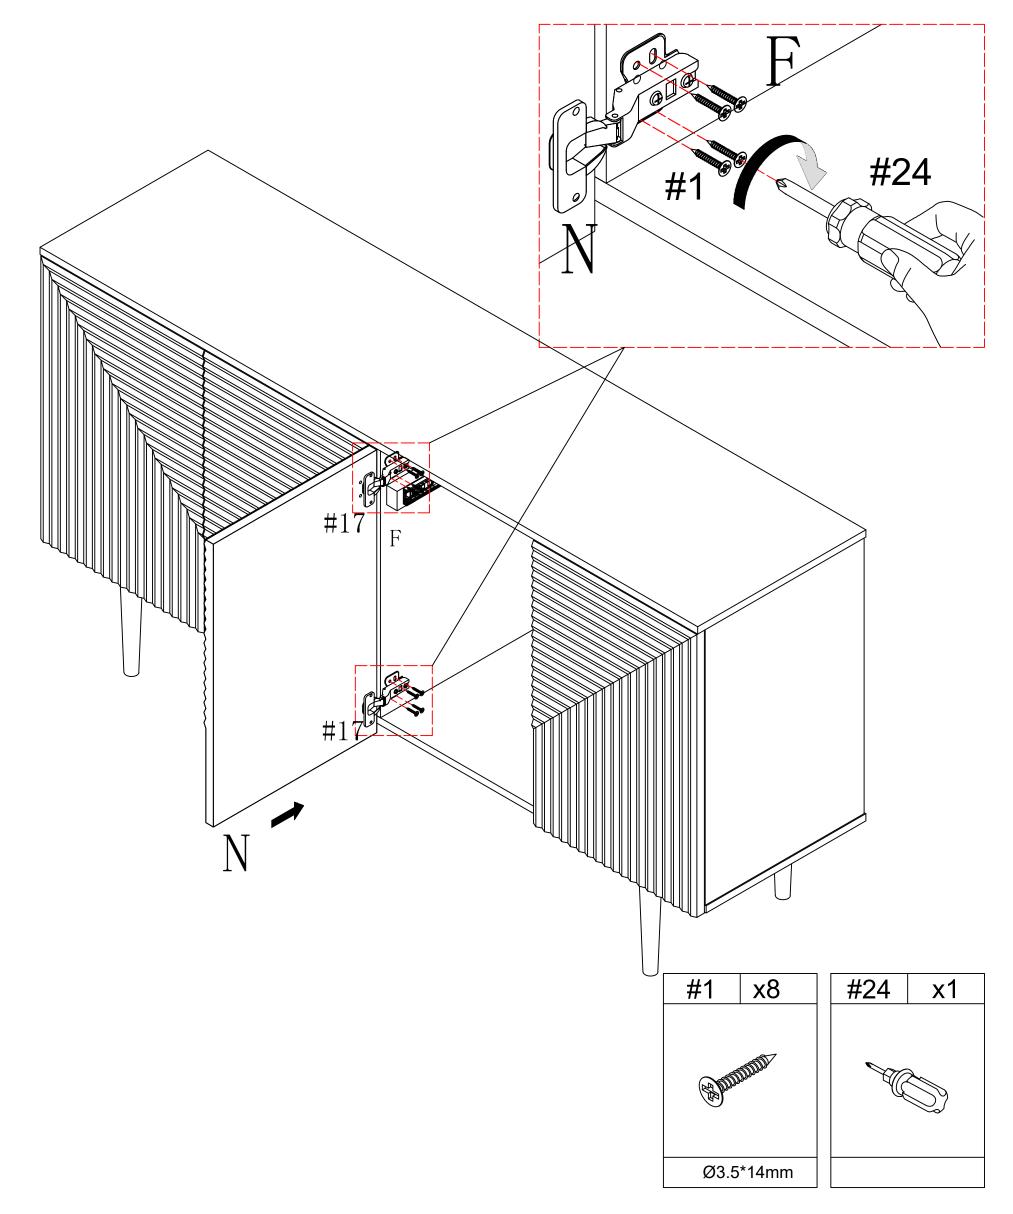


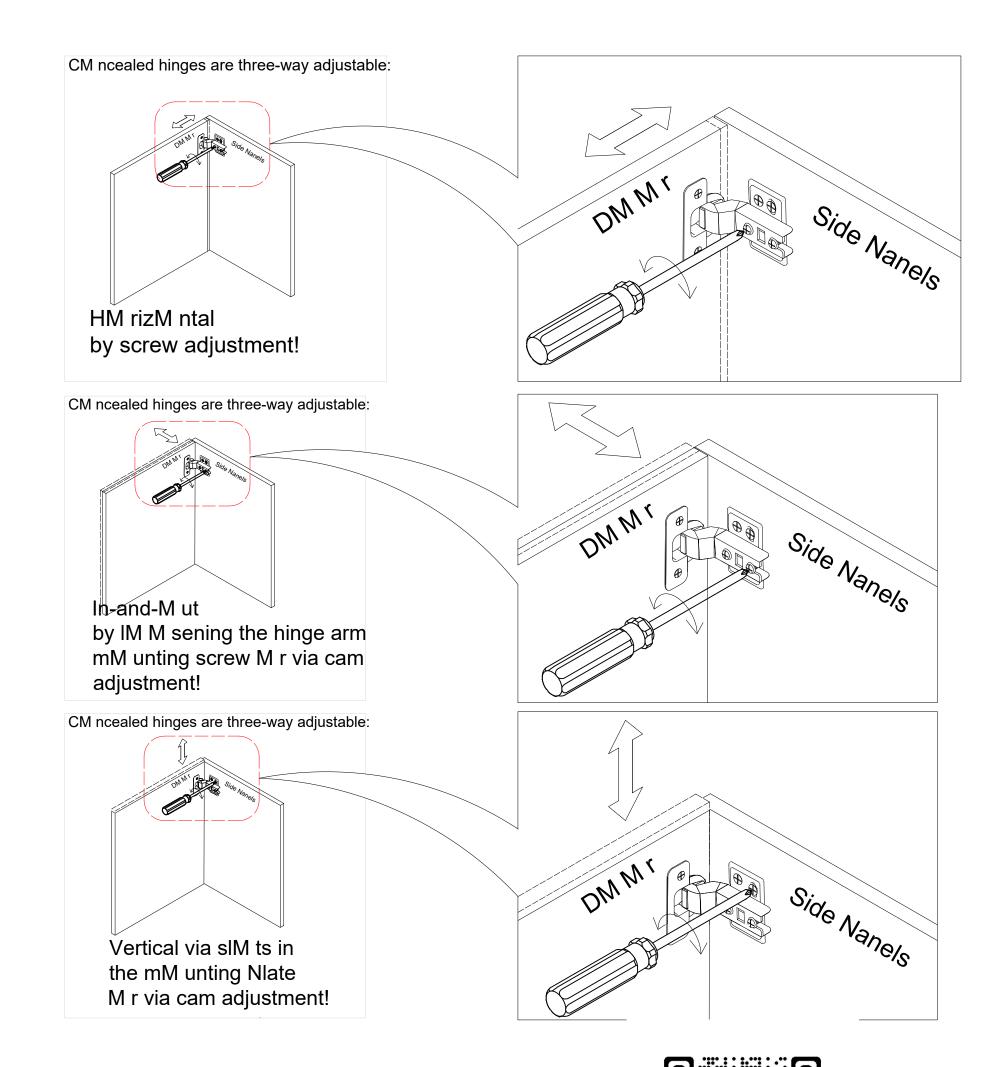

Uideo for door adjustment Hinge adjustment method



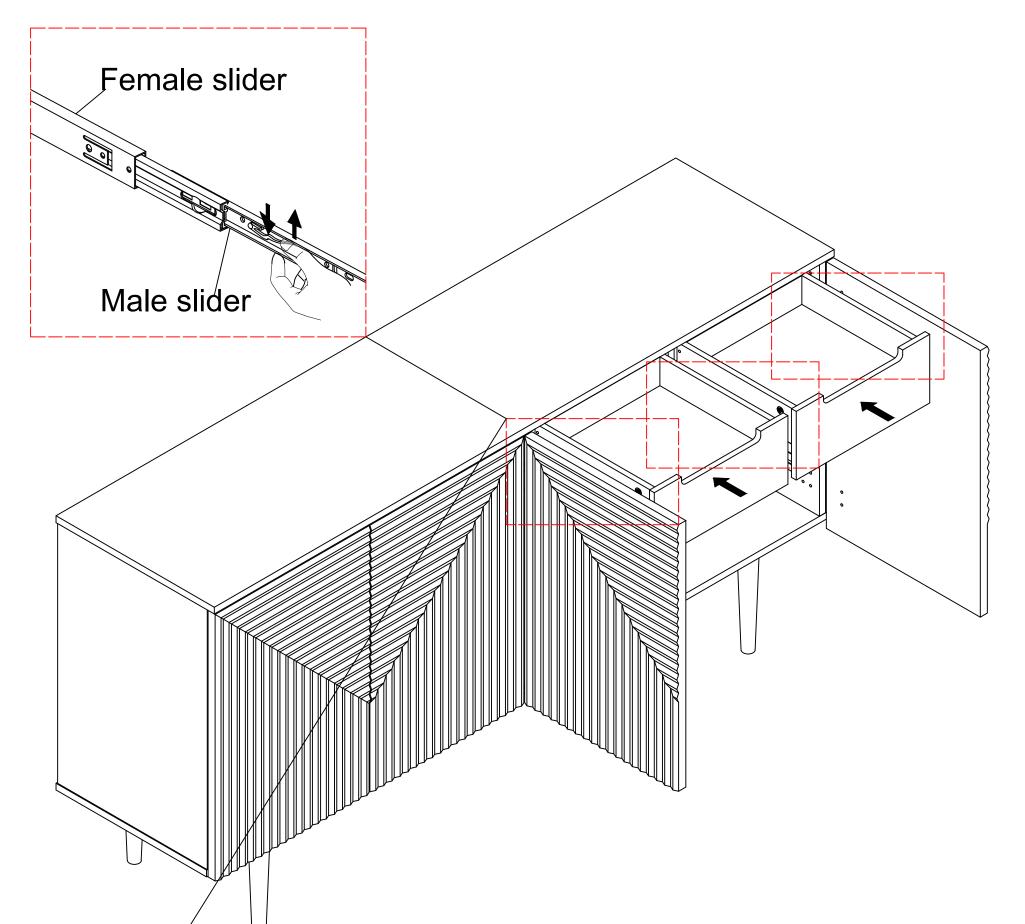


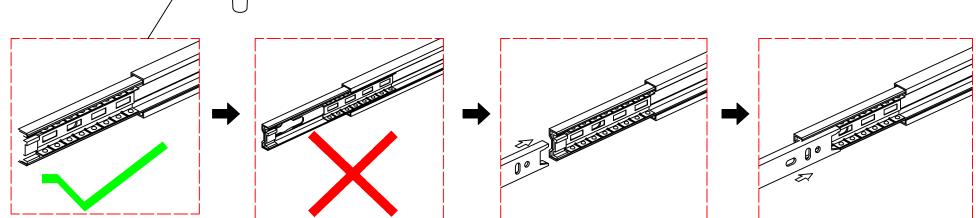




STEP-30

Place the adjustable shelf #H&I into the pre-assembled unit in step 30 and insert the shelf pins #16 into the side panels C&E&F.

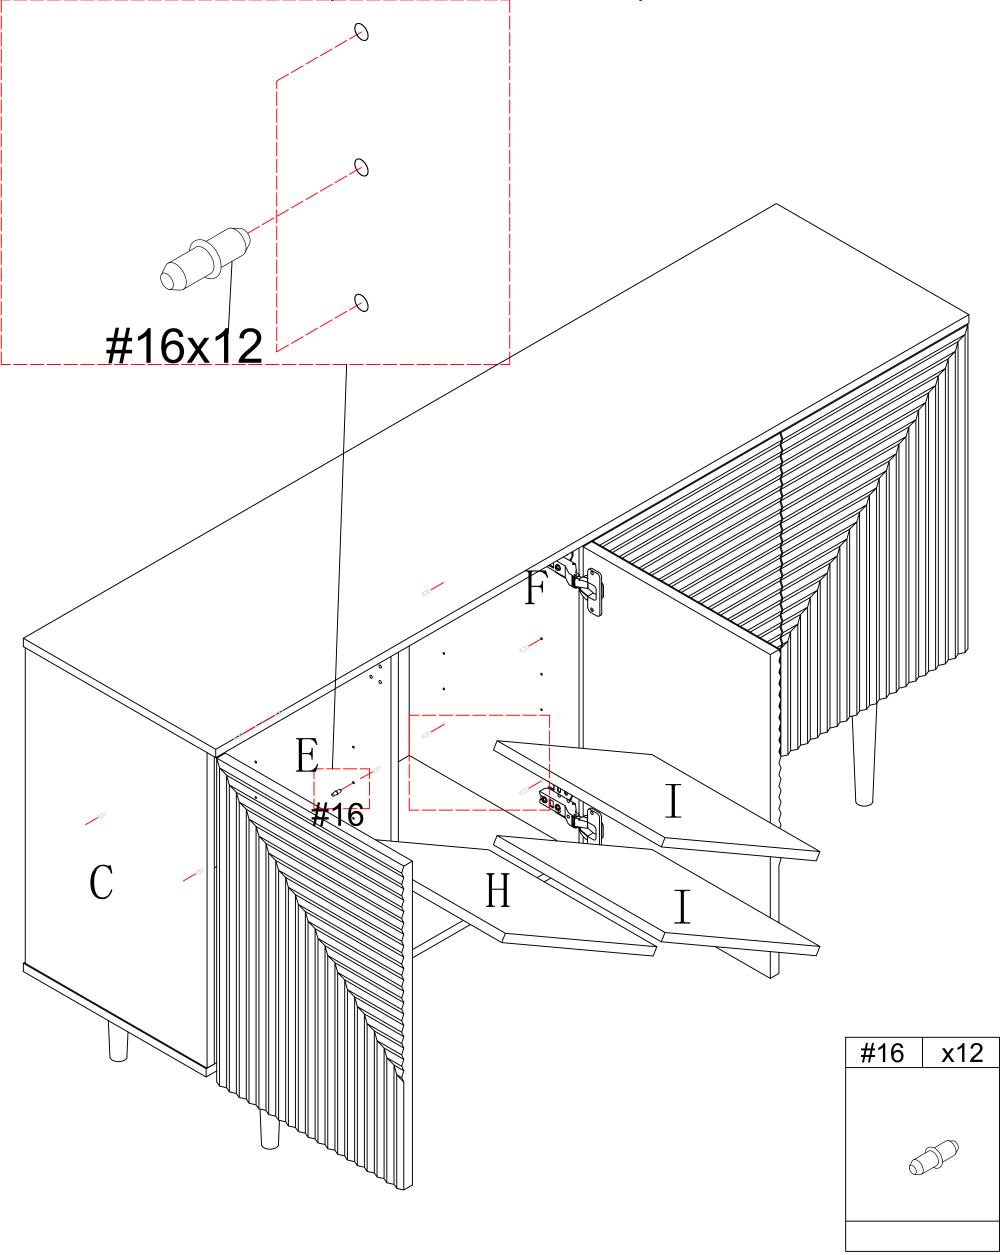




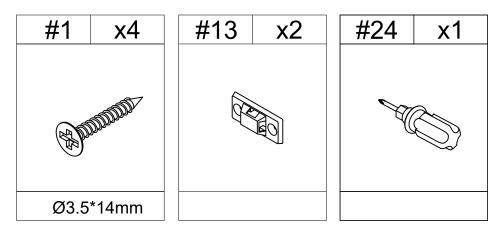


STEP-31

1.Use screw #1 to attach part #13 to pre-assemble unit at step

31, tighten screws with screwdriver #24.

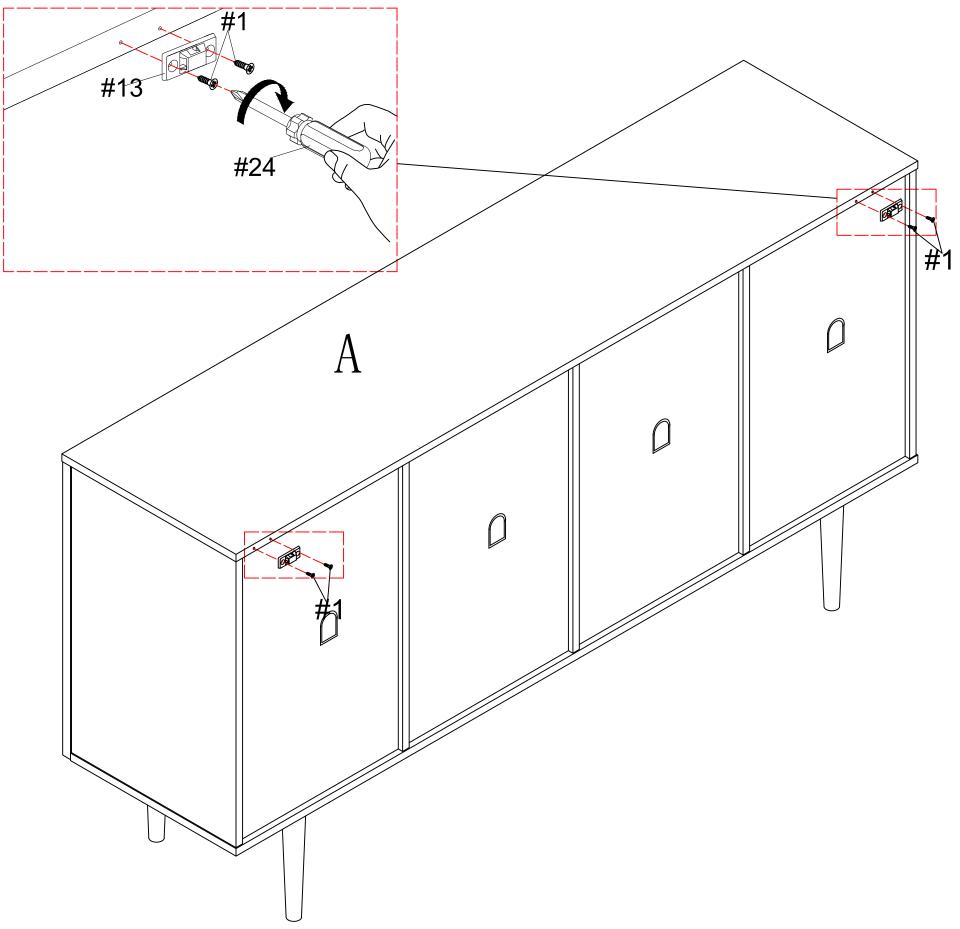

38/41

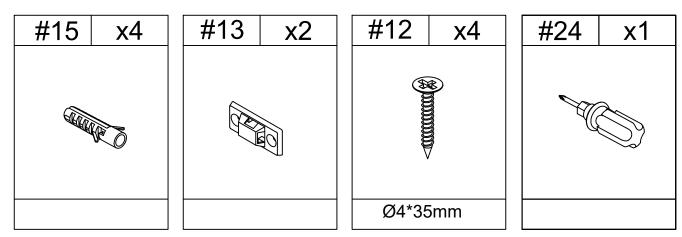


STEP-32


1.Install the anti-collapse device.

2.Mark the position on the wall, that corresponds to the location of part#13 on the of panel (A); Drill and insert the expandable screw #15 by hammer.

3.Assemble the part #13 to the wall. Align the hole in the part #13 with the expandable screw #15, use screw #12 to attach it and tighten by screwdriver#24.

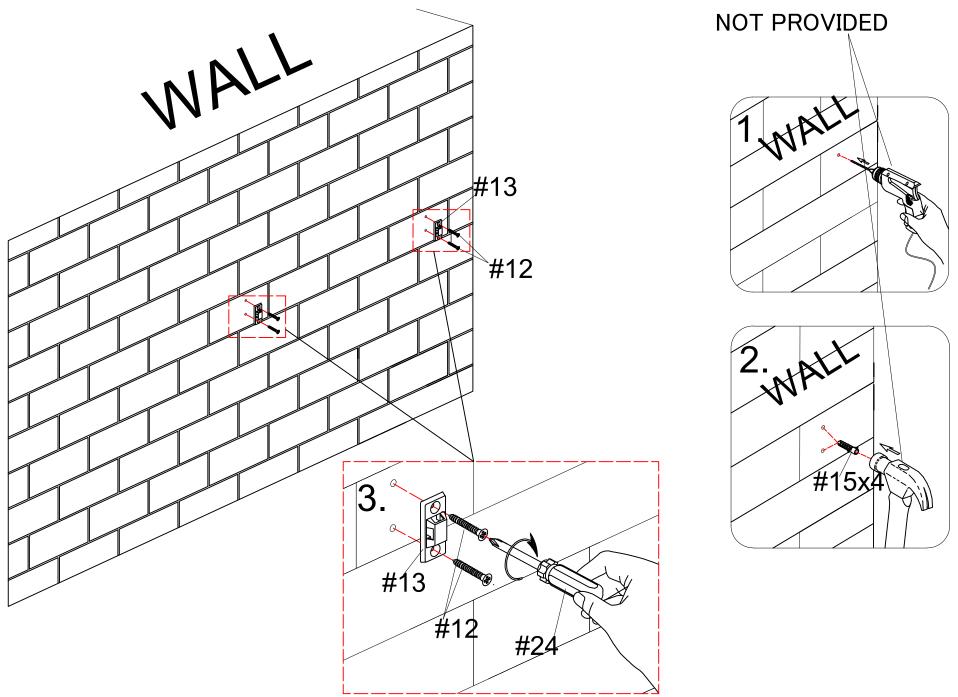






STEP-33

1.Let the plastic belt #14 pass through the both part #13 and pull tightly.

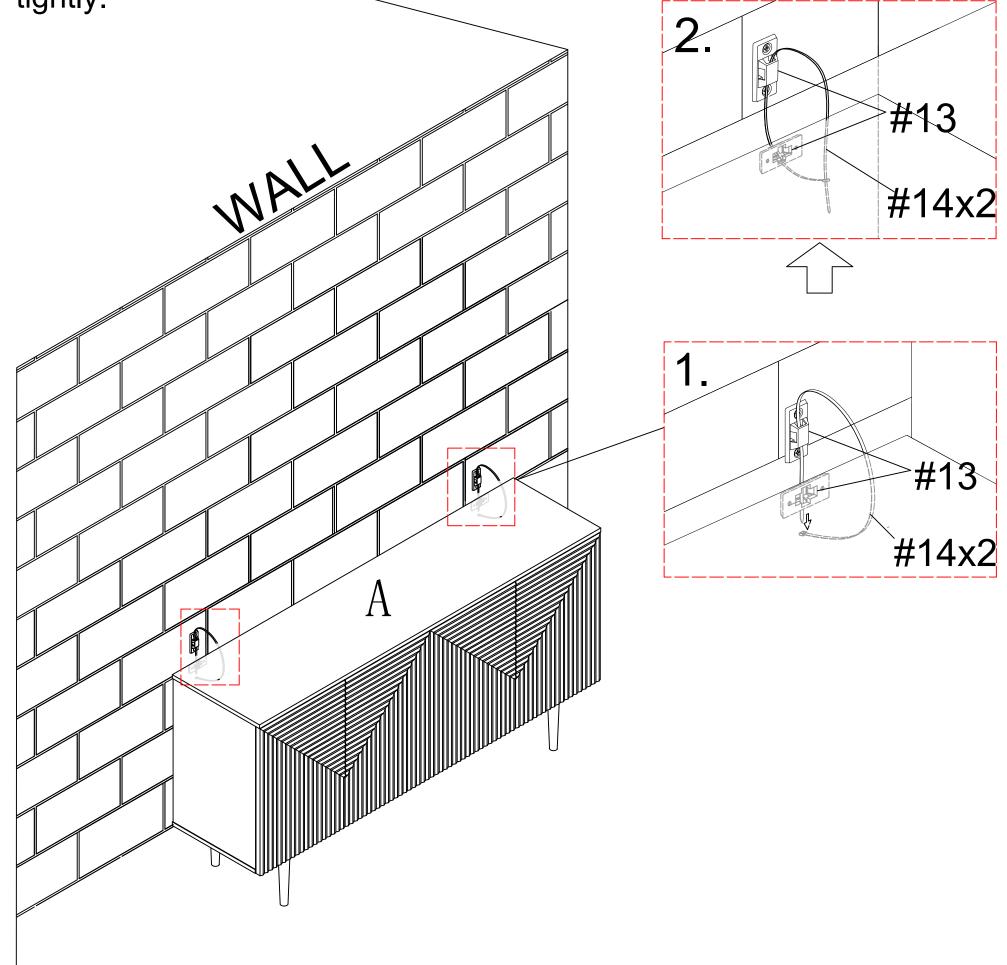



- 1.We strive to offer high-quality products, and we also try our best to satisfy each and every customer that orders from us with product or service as needed.
- 2.We provide 30 days warranty starting from the time you receive the item.Each customer must provide a record of their order such as the order number,or item receipt for any items that are out of the warranty period you may also still receive.
- 3.Replacement parts by purchasing them with our company if they are available.